




APPLICATION TOOLING MINI-MAC APPLICATOR SPECIFICATION SHEET



TERMINAL SPECIFICATION

TERMINAL SERIES	WIRE SIZE		INSULATION DIAMETER		STRIP LENGTH	
	MIN	MAX	ENGLISH	(METRIC)	ENGLISH	(METRIC)
43375-1001	DBL 18		.110 X 2	(2.8 X 2)	.156 - .218	(3.96 - 5.54)
43374-1001	DBL 18		.110 X 2	(2.8 X 2)	.156 - .218	(3.96 - 5.54)
			-	(-)	-	(-)
			-	(-)	-	(-)
			-	(-)	-	(-)
			-	(-)	-	(-)
			-	(-)	-	(-)
			-	(-)	-	(-)

TOOLING INFORMATION

ITEM	ORDER NO.	SIZE	ENG. NO.	DESCRIPTION	REQ'D
4	634430002	B	634430002	FRONT CUT-OFF PLUNGER.	1
6	1-18-5418	B	60843A106	CONDUCTOR PUNCH.	1
7	634452562	B	634452562	CONDUCTOR ANVIL.	1
8	1-18-5414	B	60842A108	INSULATION PUNCH.	1
9	634453947	B	634453947	INSULATION ANVIL.	1
10	631430012	B	634430012	CUT-OFF PLUNGER RETAINER.	1
...	638303070		638303070	TOOL KIT (ALL THE ABOVE ITEMS)	1

CRIMP SPECIFICATION

WIRE		CRIMP HEIGHT		CRIMP WIDTH (REF.)		PULL FORCE MINIMUM	
SET	AWG	ENGLISH	(METRIC)	ENGLISH	(METRIC)	LBS.	(N)
	DBL 18	.058 - .062	(1.47 - 1.57)	.098	(2.50)	20	(88.9)
		-	(-)		()		()
		-	(-)		()		()
		-	(-)		()		()
		-	(-)		()		()

NOTES:

1. WE RECOMMEND AN EXTRA SET OF PERISHABLE TOOLING BE MAINTAINED IN YOUR FACTORY.
2. VERIFY TOOLING ALIGNMENT BY MANUALLY CYCLING THE PRESS AND DIE BEFORE CRIMPING UNDERPOWER. CHECK THAT ALL SCREWS ARE TIGHT.
3. SLUGS, TERMINALS, DIRT AND OIL SHOULD BE KEPT CLEAR OF WORK AREA.
4. TO USE THE ABOVE SETTINGS, YOUR PRESS SHOULD HAVE A SHUT HEIGHT OF 135.8 MM. CRIMP HEIGHT MAY STILL VARY DEPENDING ON STYLE AND WIRE TYPE. SHIMMING COULD BE NECESSARY TO ACHIEVE CRIMP HEIGHTS.
5. TO PREVENT INJURY - NEVER OPERATE THIS TOOL WITHOUT THE GUARDING SUPPLIED WITH THE PRESS IN PLACE.







DIMENSIONS SHOWN (METRIC) INCH			
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°			
		INCH	METRIC
3 PLACE	±		---
2 PLACE	±		±
1 PLACE		---	±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY	JMP	CHK'D. BY	GOC
APP'D. BY		SCALE	NA:

 =		 =		REVISE ONLY ON CAD SYSTEM		
TITLE						
SPECIAL DOUBLES APPLICATOR FOR HOUSING PART NOS. 6313, 43275 & 41644-24						
 MOLEX INCORPORATED		SHEET NO.		DATE		
LISLE, ILL. 60532 U.S.A.		1 OF 4		03/15/99		
PART NO.		DRWG. NO.				
638303000		638303000				
FILE NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			DIV.	SIZE
6383030					AT	A




APPLICATION TOOLING MINI-MAC APPLICATOR SPECIFICATION SHEET

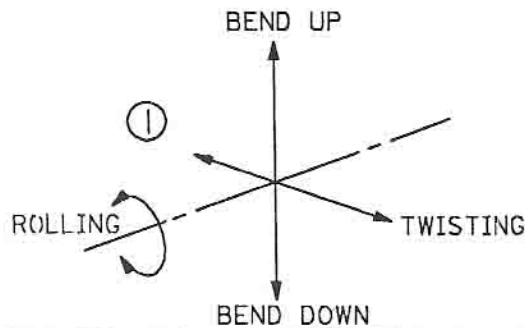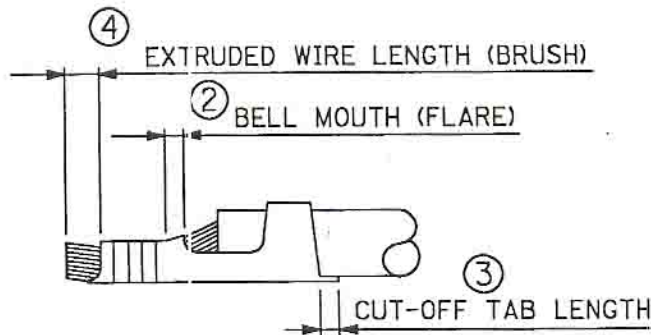

CRIMP SPECIFICATION

NO. OF FIG.	ITEM	REQUIREMENT
1	BEND UP	3°
	BEND DOWN	3°
	TWISTING	4°
	ROLLING	8°
2	BELL MOUTH (FLARE)	.20 - .50mm
3	CUT-OFF TAB LENGTH	.012" MAX. (.30mm MAX.)
4	EXTRUDED WIRE LENGTH (BRUSH)	.030" MAX. (.76mm MAX.)
5	SEAM	SEAM SHALL NOT BE OPENED AND NO WIRE ALLOWED OUT OF THE CRIMPING AREA.

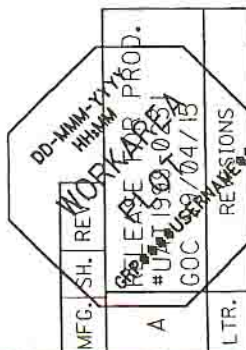


DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR $\pm 1/2^\circ$

	INCH	METRIC
3 PLACE	$\pm$	---
2 PLACE	$\pm$	$\pm$
1 PLACE	---	$\pm$

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DRWG. BY JMP CHK'D. BY GOC
APP'D. BY SCALE NA



REVISE ONLY ON CAD SYSTEM

TITLE
SPECIAL DOUBLES APPLICATOR
FOR HOUSING PART NOS.
6313, 43275 & 41644-24

Molex MOLEX INCORPORATED
LISLE, ILL. 60532 U.S.A.

SHEET NO. 2 OF 4 DATE 03/15/99

PART NO. 638303000

DRWG. NO. 638303000

FILE NAME
63830300
SBI


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DIV. AT SIZE A

UC



MINI-MAC APPLICATOR SPECIFICATION SHEET



APPLICATOR ASSEMBLY - PARTS LIST

ITEM	ORDER NO.	SIZE	ENG. NO.	DESCRIPTION	REQ'D
11	638303002	B	638303002	ANVIL MOUNT	1
14	638303001	B	638303001	PLUNGER STRIKER	1
15	638303005	B	638303005	TOOLING WASHER	1
16	11-24-1067	A	4996-4	CUT-OFF PLUNGER SPRING	1
17	11-18-5348	B	60811A126	REAR COVER	1
18					
21	11-18-5016	B	60812A105	CONDUCTOR ADJUSTING CAM	1
22	638220106	B	638220106	TERMINAL STRIPPER	1
23	11-18-5442	B	60843A123	FRONT COVER	1
40	11-18-5007	A	60800D114	HOLD DOWN PLUNGER SPRING	1
41	638303003	B	638303003	HOLD DOWN BLOCK	1
42	11-18-5411	B	60832A142	SPRING RETAINER	1
43	11-18-5412	B	60832A143	HOLD DOWN PLUNGER	1
12	634430021	B	634430021	MOUNTING KEY	1
---	11-18-4795	A	60700-66	WAVE WASHER	1
---	11-18-4238	A	60700-1	FEED CAM (SHORT)	1

TOOLING INFORMATION

ITEM	ORDER NO.	SIZE	ENG. NO.	DESCRIPTION	REQ'D
4	634430002	B	634430002	FRONT CUT-OFF PLUNGER	1
6	11-18-5418	B	60843A106	CONDUCTOR PUNCH	1
7	634452562	B	634452562	CONDUCTOR ANVIL	1
8	11-18-5414	B	60842A108	INSULATION PUNCH	1
9	634453947	B	634453947	INSULATION ANVIL	1
10	634430012	B	634430012	CUT-OFF PLUNGER RETAINER	1
---	638303070		638303070	TOOL KIT (ALL THE ABOVE ITEMS)	1

FRAME ASSY

ITEM	ORDER NO.	SIZE	ENG. NO.	DESCRIPTION	REQ'D
	63800-0100	B	63800-0100	FRAME ASSY	1
	11-18-5016	B	60812A105	CONDUCTOR ADJUSTING CAM	1



DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR $\pm 1/2^\circ$

	INCH	METRIC
3 PLACE	$\pm$ ---	---
2 PLACE	$\pm$ ---	± 0.13
1 PLACE	---	± 0.25

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DRWG. BY	GOC	CHK'D. BY	GOC
APP'D. BY		SCALE	NA:



REVISE ONLY ON CAD SYSTEM

TITLE

SPECIAL DOUBLES APPLICATOR
FOR HOUSING PART NOS.
6313, 43275 & 41644-24



MOLEX INCORPORATED
LITSEJLL. 60532 U.S.A.

SHEET NO.

DATE

3 OF 4

02/23/95

PART NO.

DRWG. NO.

638303000

638303000

FILE NAME

6383030


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DIV.

AT

SIZE

A

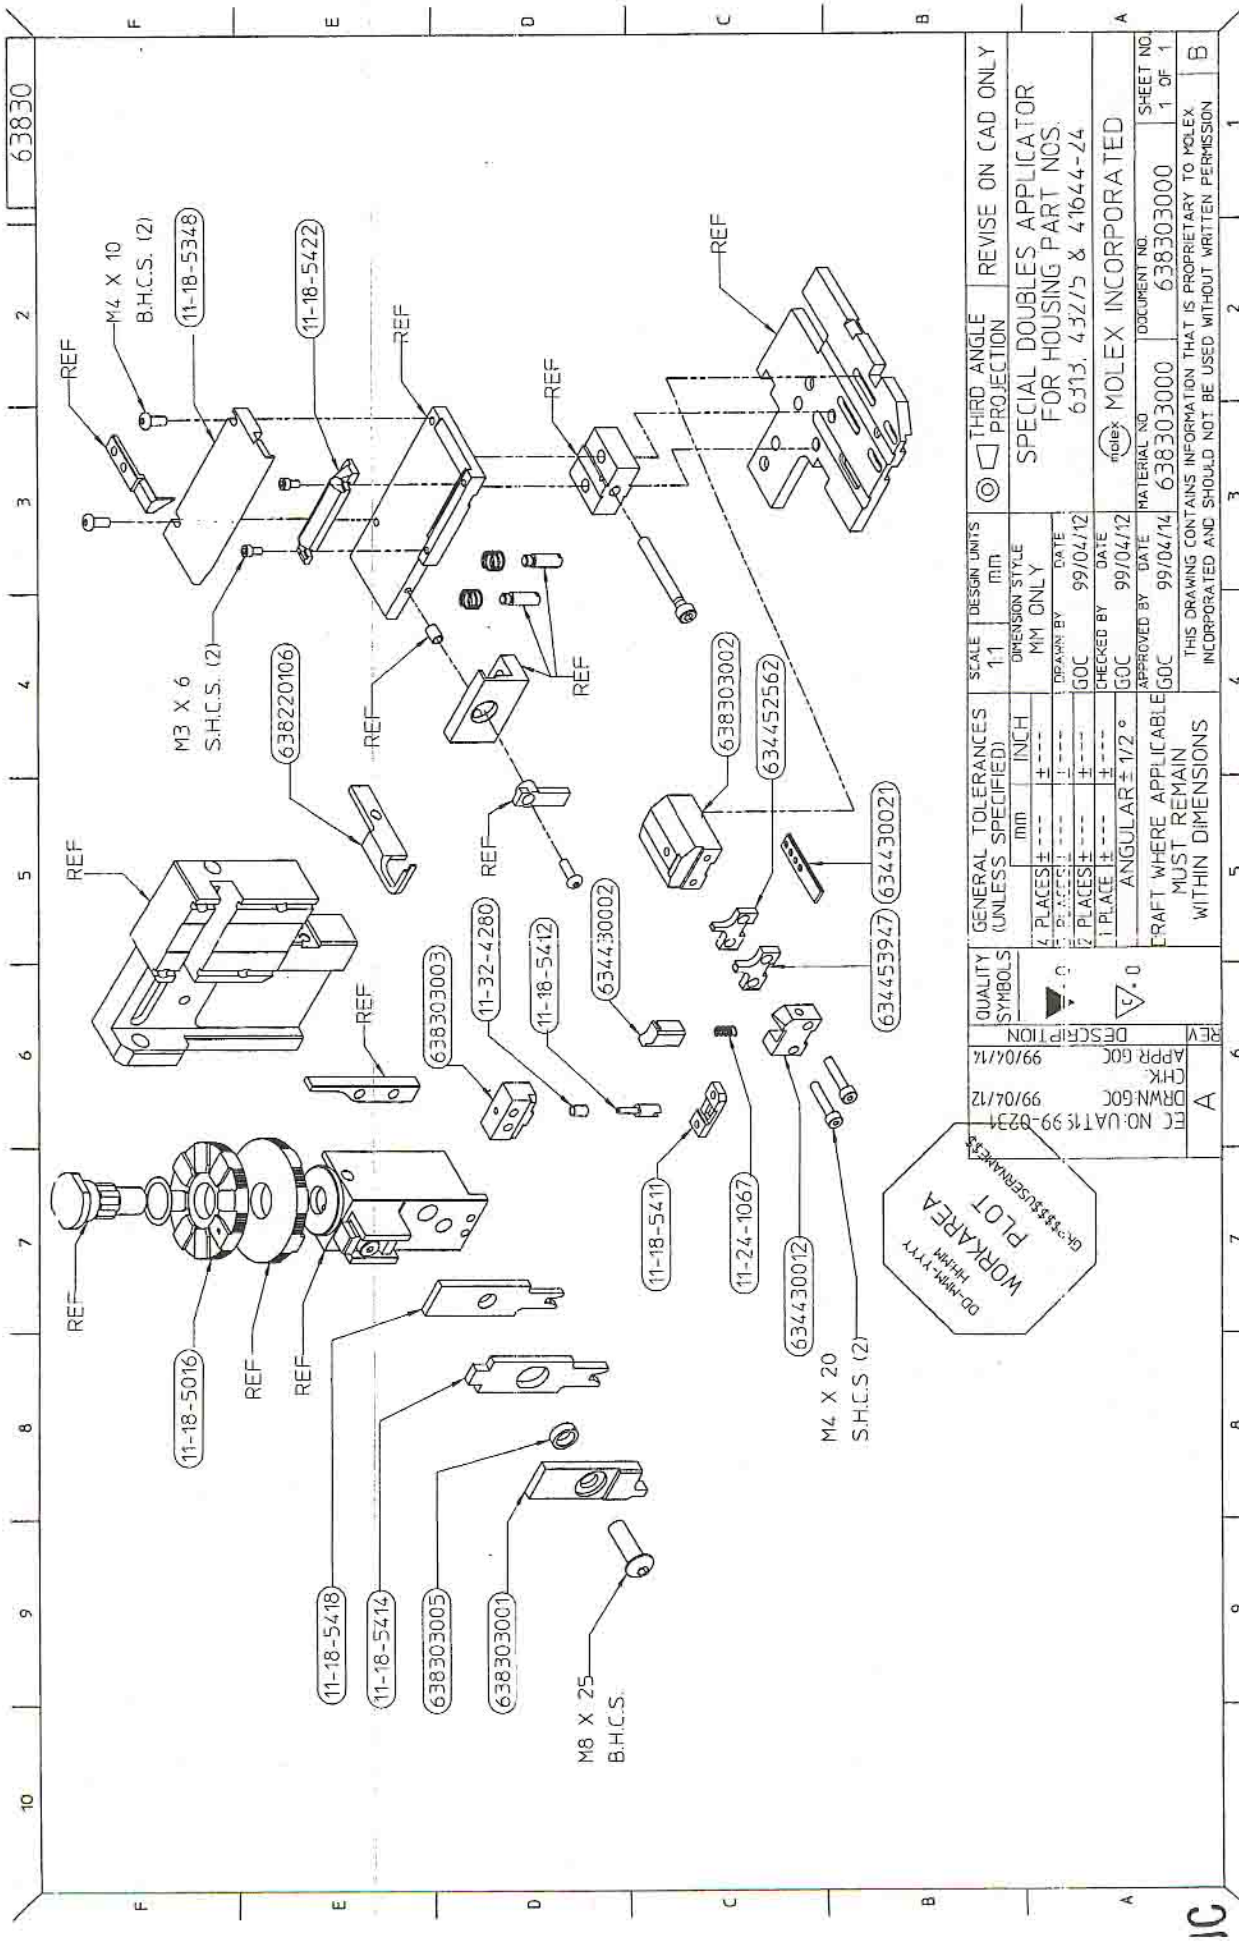

WORKAREA
PLOT
DD-MMM-YY
HHMM
GR-0335USERSWAKERS

REV	DESCRIPTION	DATE
A	DRWN:GOC	99/04/12
	CHK:	
	APPR:GOC	99/04/14

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
0.0 0.0	mm mm mm mm INCH INCH INCH INCH	1:1	MM ONLY	THIRD ANGLE PROJECTION	REVISION DATE
1 PLACES ±	1 PLACES ±	1	DATE	DATE	DATE
2 PLACES ±	2 PLACES ±	2	DATE	DATE	DATE
3 PLACES ±	3 PLACES ±	3	DATE	DATE	DATE
4 PLACES ±	4 PLACES ±	4	DATE	DATE	DATE
5 PLACES ±	5 PLACES ±	5	DATE	DATE	DATE
6 PLACES ±	6 PLACES ±	6	DATE	DATE	DATE
7 PLACES ±	7 PLACES ±	7	DATE	DATE	DATE
8 PLACES ±	8 PLACES ±	8	DATE	DATE	DATE
9 PLACES ±	9 PLACES ±	9	DATE	DATE	DATE
10 PLACES ±	10 PLACES ±	10	DATE	DATE	DATE
ANGULAR ± 1/2°	ANGULAR ± 1/2°	ANGULAR ± 1/2°	ANGULAR ± 1/2°	ANGULAR ± 1/2°	ANGULAR ± 1/2°

DOCUMENT NO.	SHEET NO.
638303000	1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru