




LOC	DIST	REVISONS				
		P	LTR	DESCRIPTION	DATE	OWN
GP	00	A		RELEASED PER ECO-14-008758	16JUN2014	CJV
		B		REVISED PER ECO-15-010819	10AUG2015	PP
		B1		REVISED PER ECO-16-004263	17MAR2016	KQ
		B2		REVISED PER ECO-16-013988	05SEP2016	PP

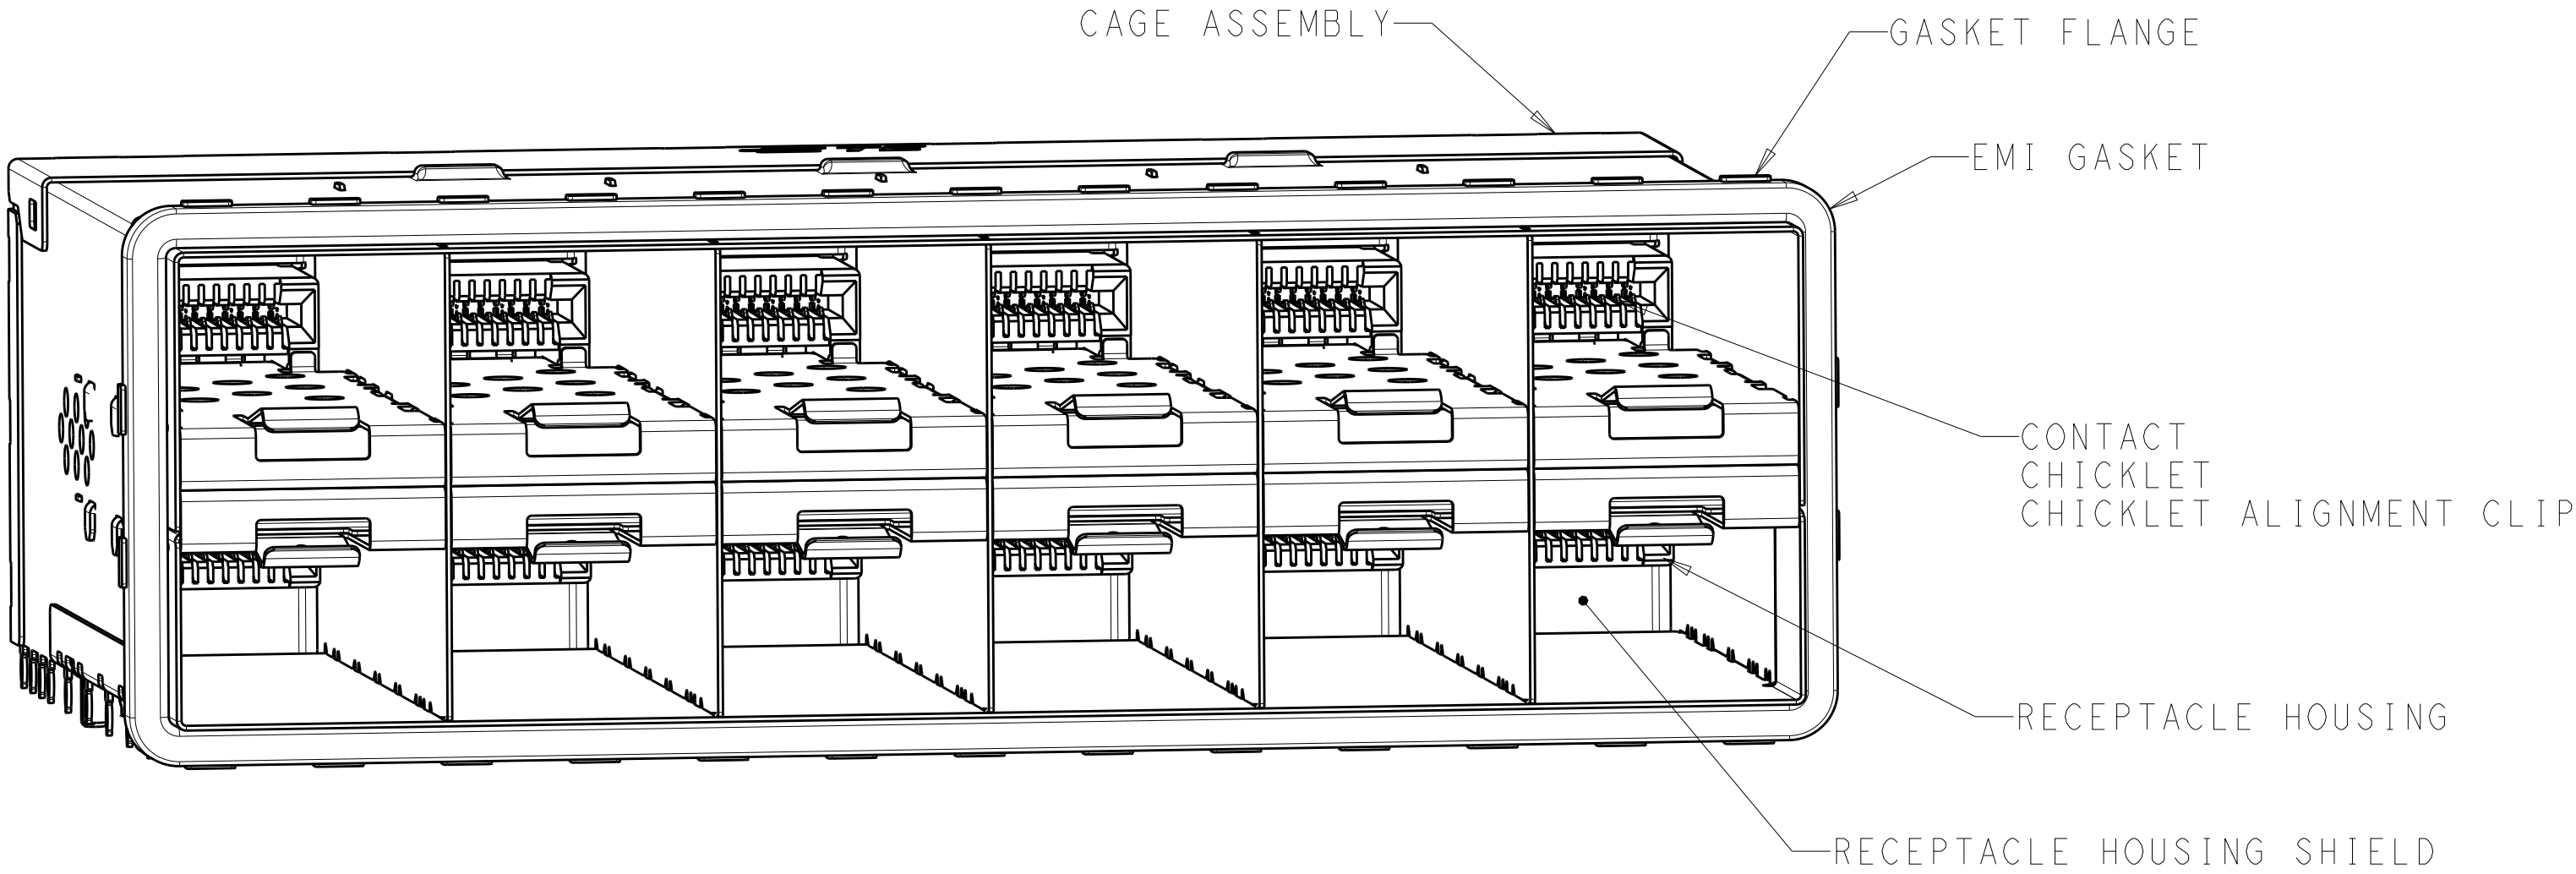


2198339-1
SCALE 3:1

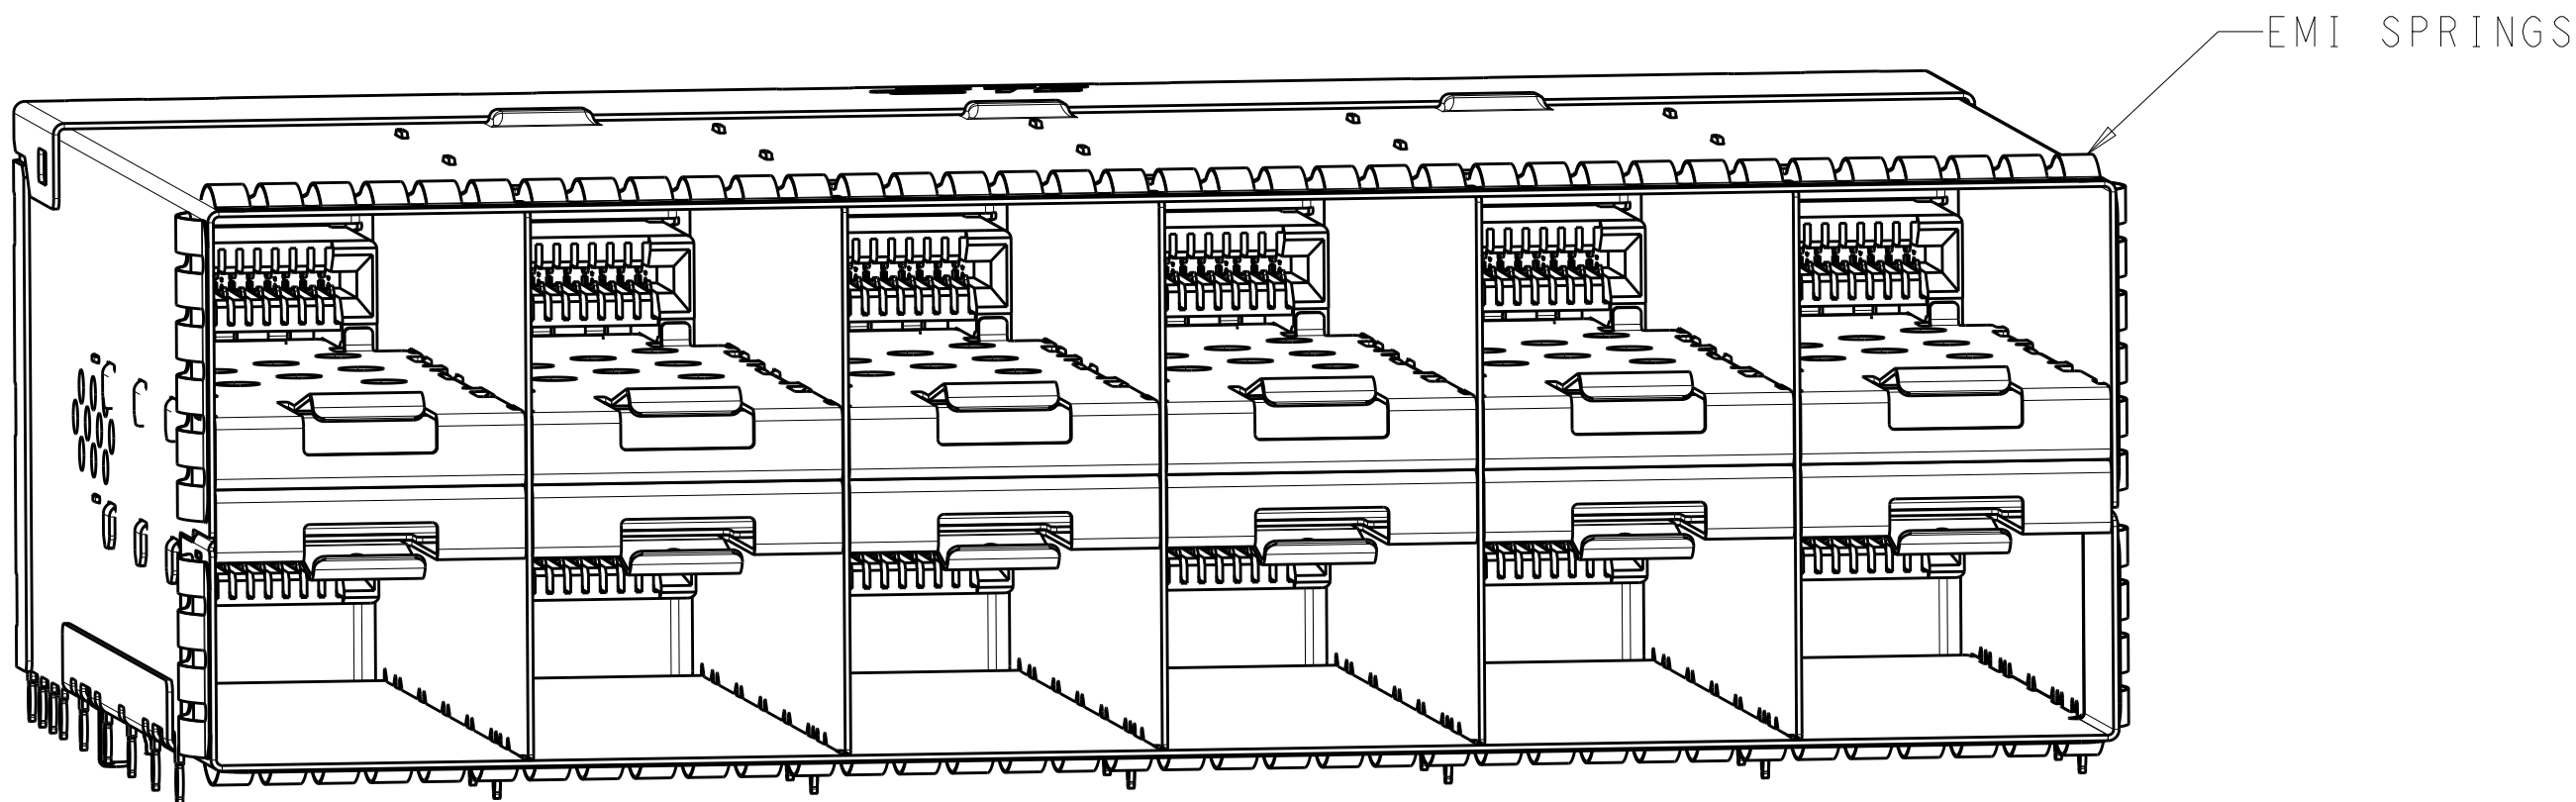


2198339-5
SCALE 3:1

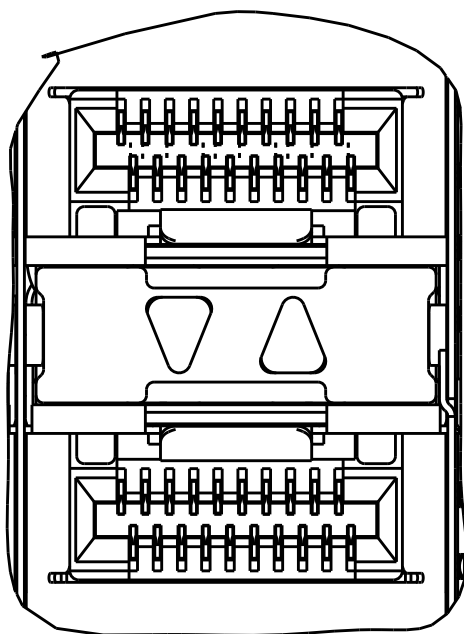


REVERSED INNER LIGHT PIPES
2-2198339-1
SCALE 4:1

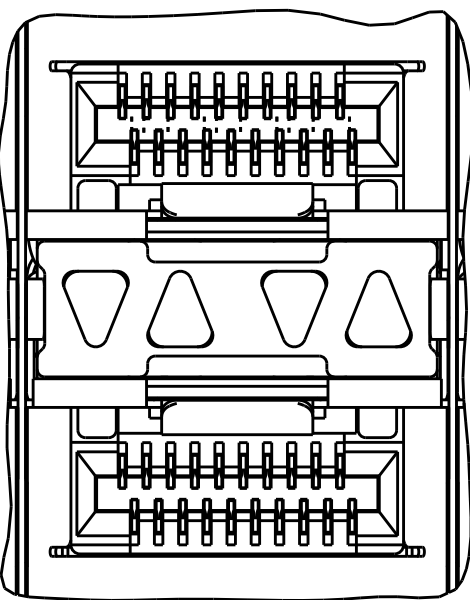


INNER/OUTER LIGHT PIPES
2198339-2, 2198339-6
SCALE 4:1

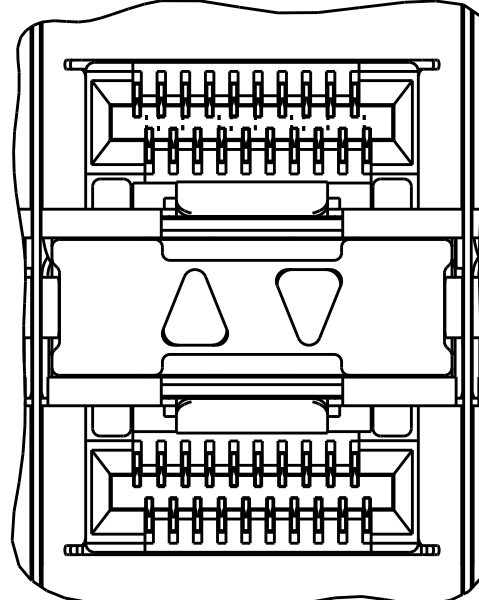


INNER LIGHT PIPES
2198339-3, 2198339-7
SCALE 4:1

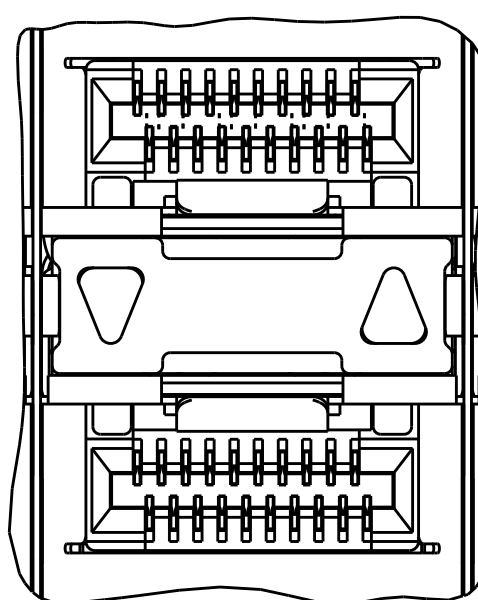

OUTER LIGHT PIPES
2198339-4, 2198339-8
SCALE 4:1

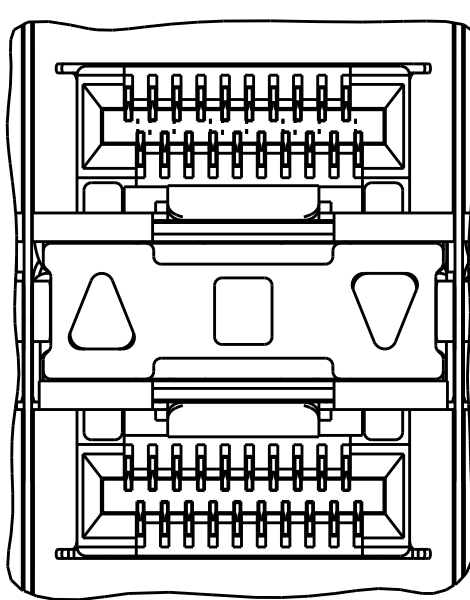

CENTER/REVERSED OUTER
1-2198339-7, 1-2198339-9
SCALE 4:1

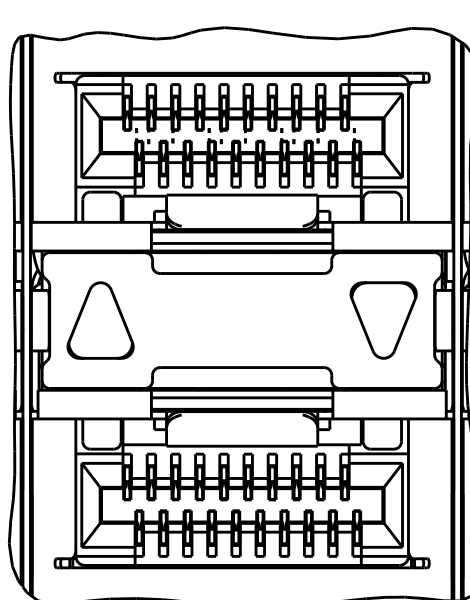

REVERSED OUTER
1-2198339-8, 2-2198339-0
SCALE 4:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CONNECTOR HOUSING SHIELD - COPPER ALLOY
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - PBT
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE HOUSING - ZINC ALLOY

2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE

3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319

5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm

6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY


7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN

88	EMI SPRING AIRFLOW ENHANCE TYPE	NONE	3-2198339-1
90.75	EMI GASKET AIRFLOW ENHANCE TYPE	NONE	3-2198339-0
88	EMI SPRINGS	REVERSED INNER	2-2198339-1
		REVERSED OUTER	2-2198339-0
		CENTER/REVERSED OUTER	1-2198339-9
90.75	EMI GASKET	REVERSED OUTER	1-2198339-8
		CENTER/REVERSED OUTER	1-2198339-7
88	EMI SPRINGS	OUTER	2198339-8
		INNER	2198339-7
		INNER/OUTER	2198339-6
		NONE	2198339-5
90.75	EMI GASKET	OUTER	2198339-4
		INNER	2198339-3
		INNER/OUTER	2198339-2
		NONE	2198339-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN M.E. CONWHER CHK M.D. MORRISON APVD M.D. MORRISON	07DEC2011 13DEC2011 13DEC2011	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY ,2X6 STACKED, zSFP+	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC		± ±0.20 ±0.15 ±0.10 ±		PRODUCT SPEC 108-2481	
ANGLES		±°		APPLICATION SPEC 114-13319	
FINISH		SEE NOTES		WEIGHT -	
MATERIAL		SEE NOTES		CUSTOMER DRAWING	
SCALE		1:1		SHEET 1 OF 6	
REV		B2			

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

AIRFOLW ENHANCE TYPE

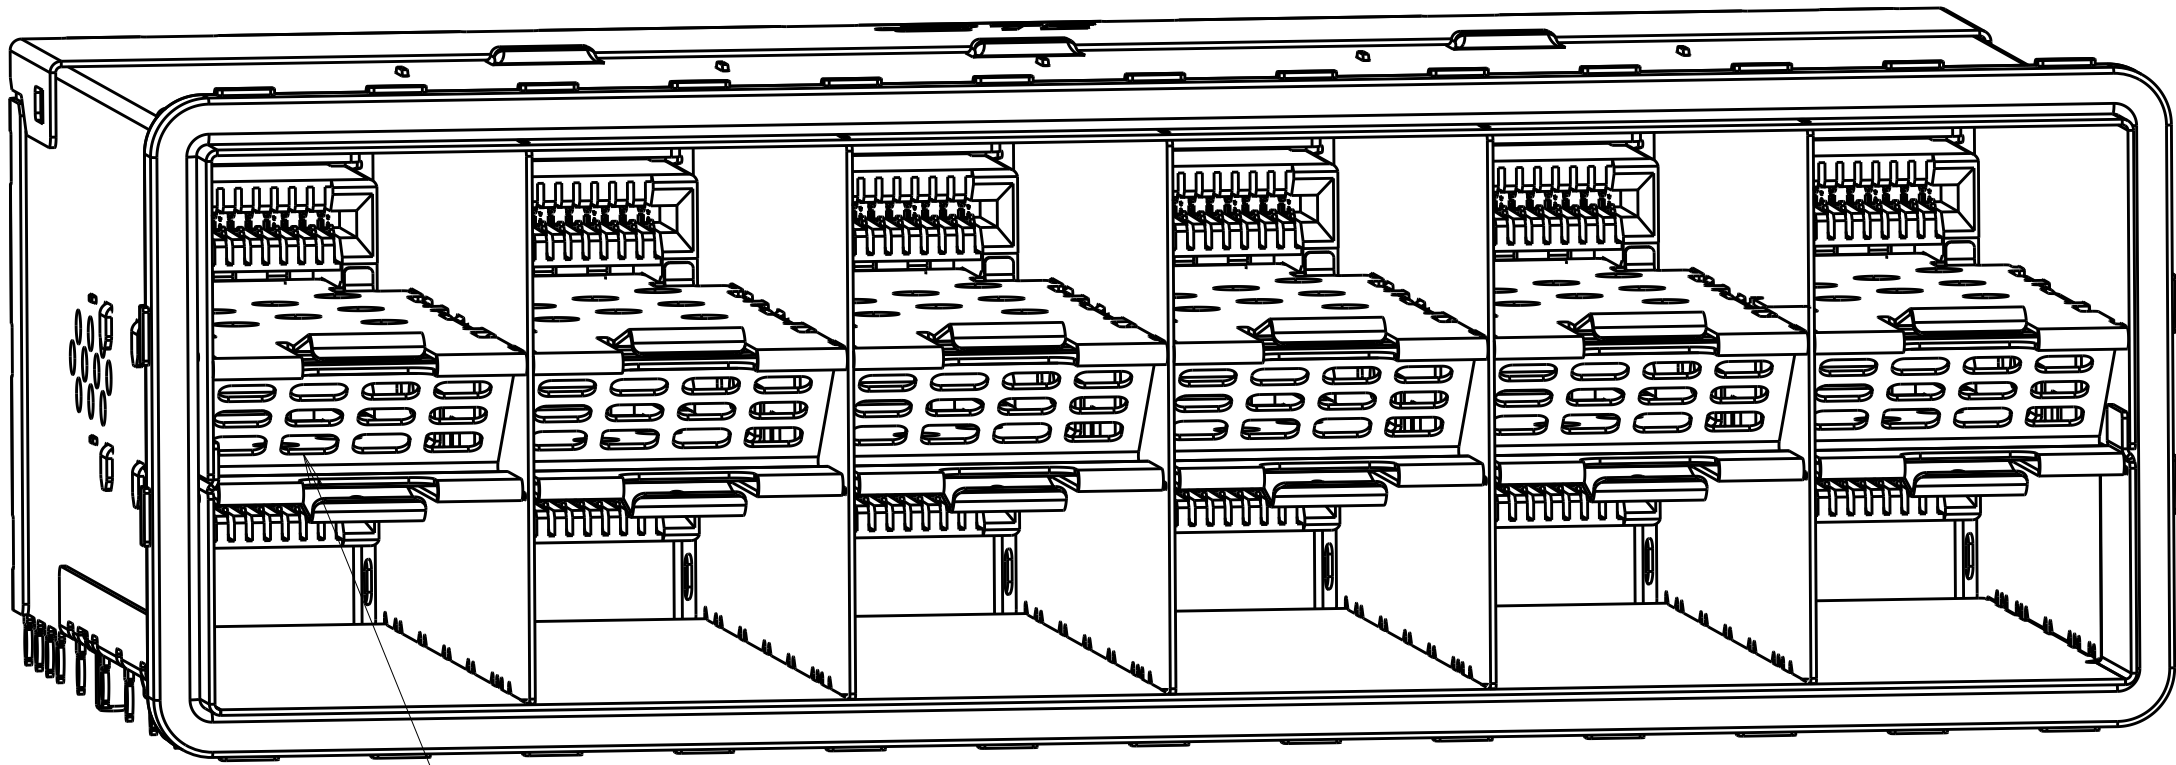


AIR VENTS

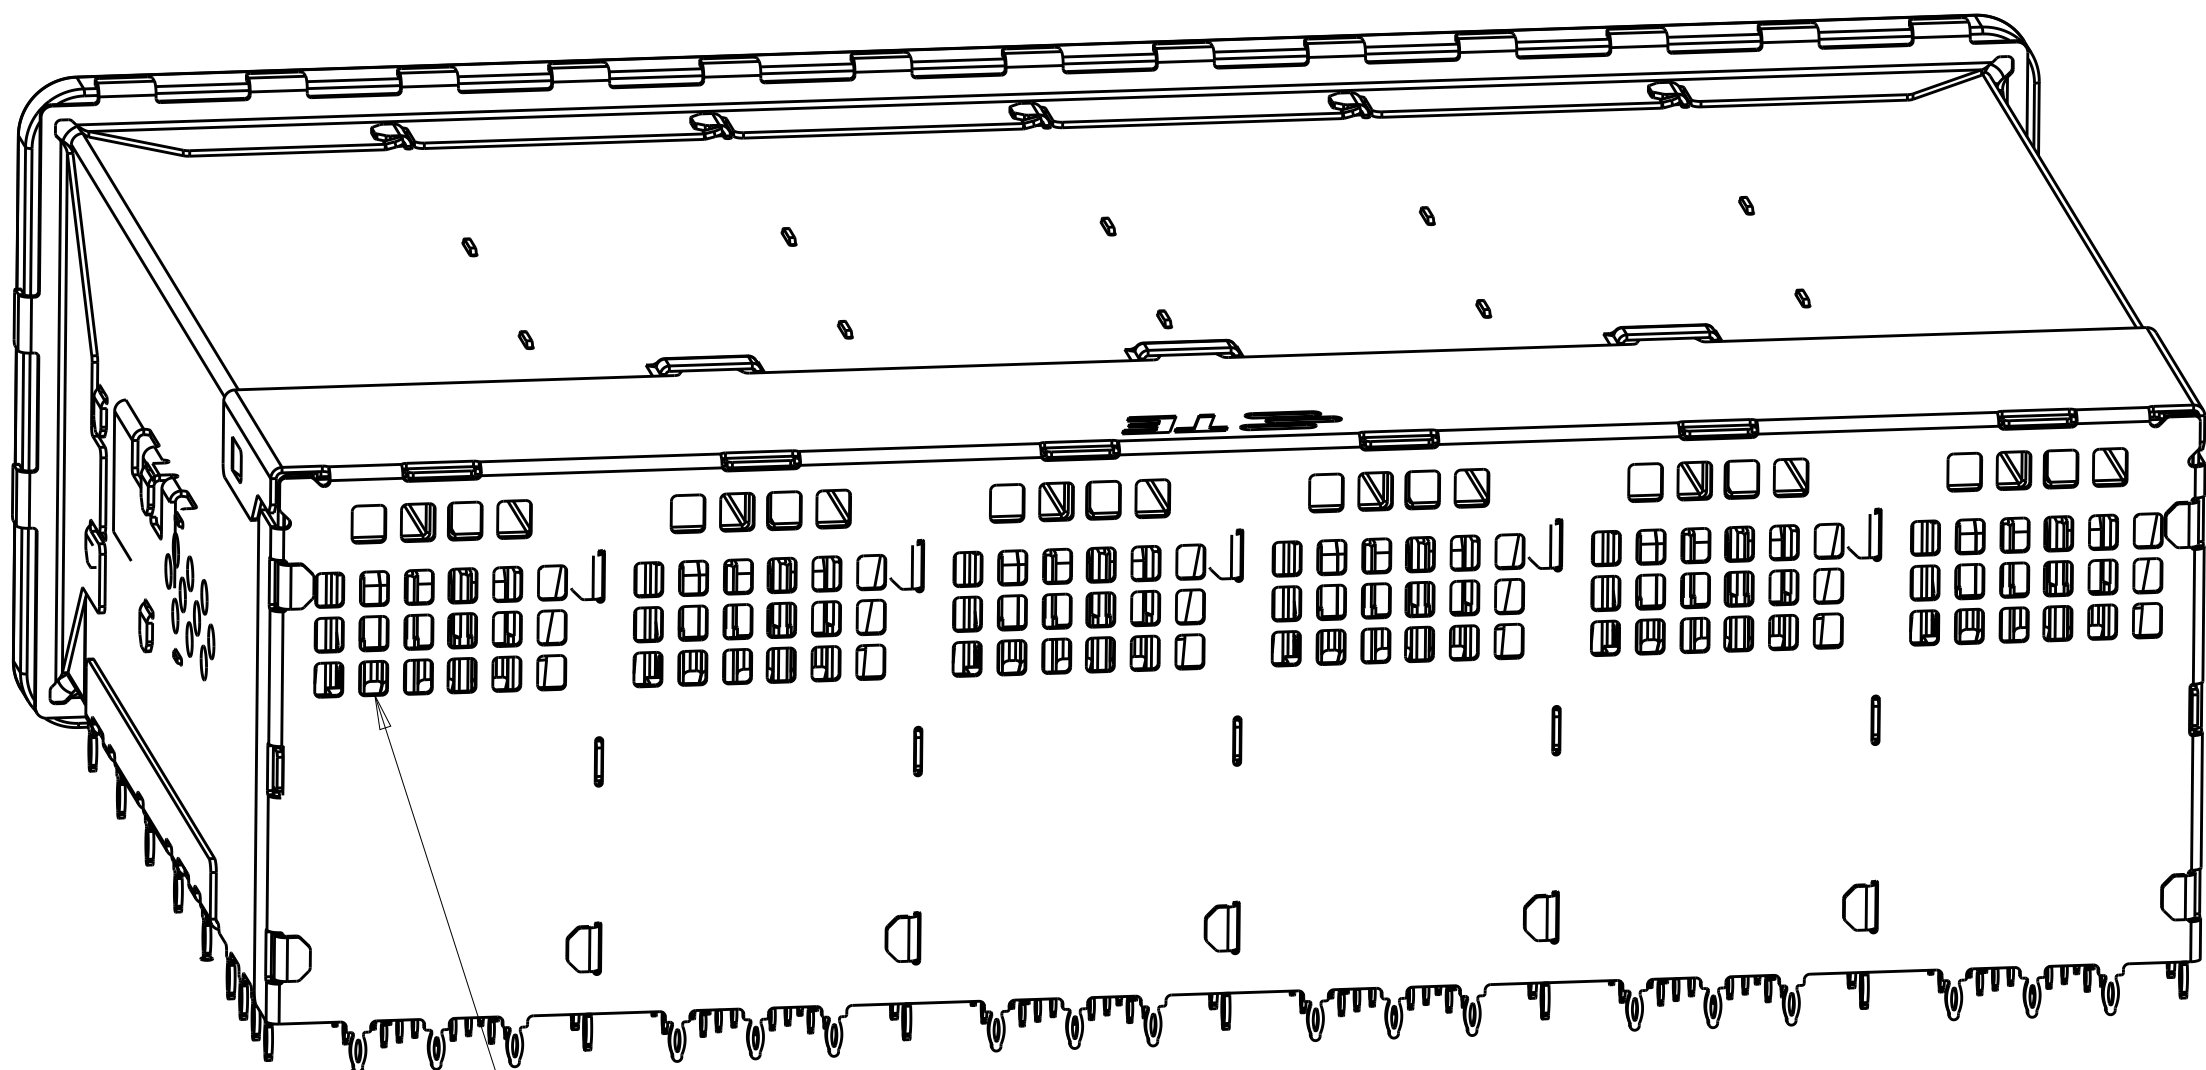


AIR VENTS

3-2198339-0
EMI GASKET TYPE

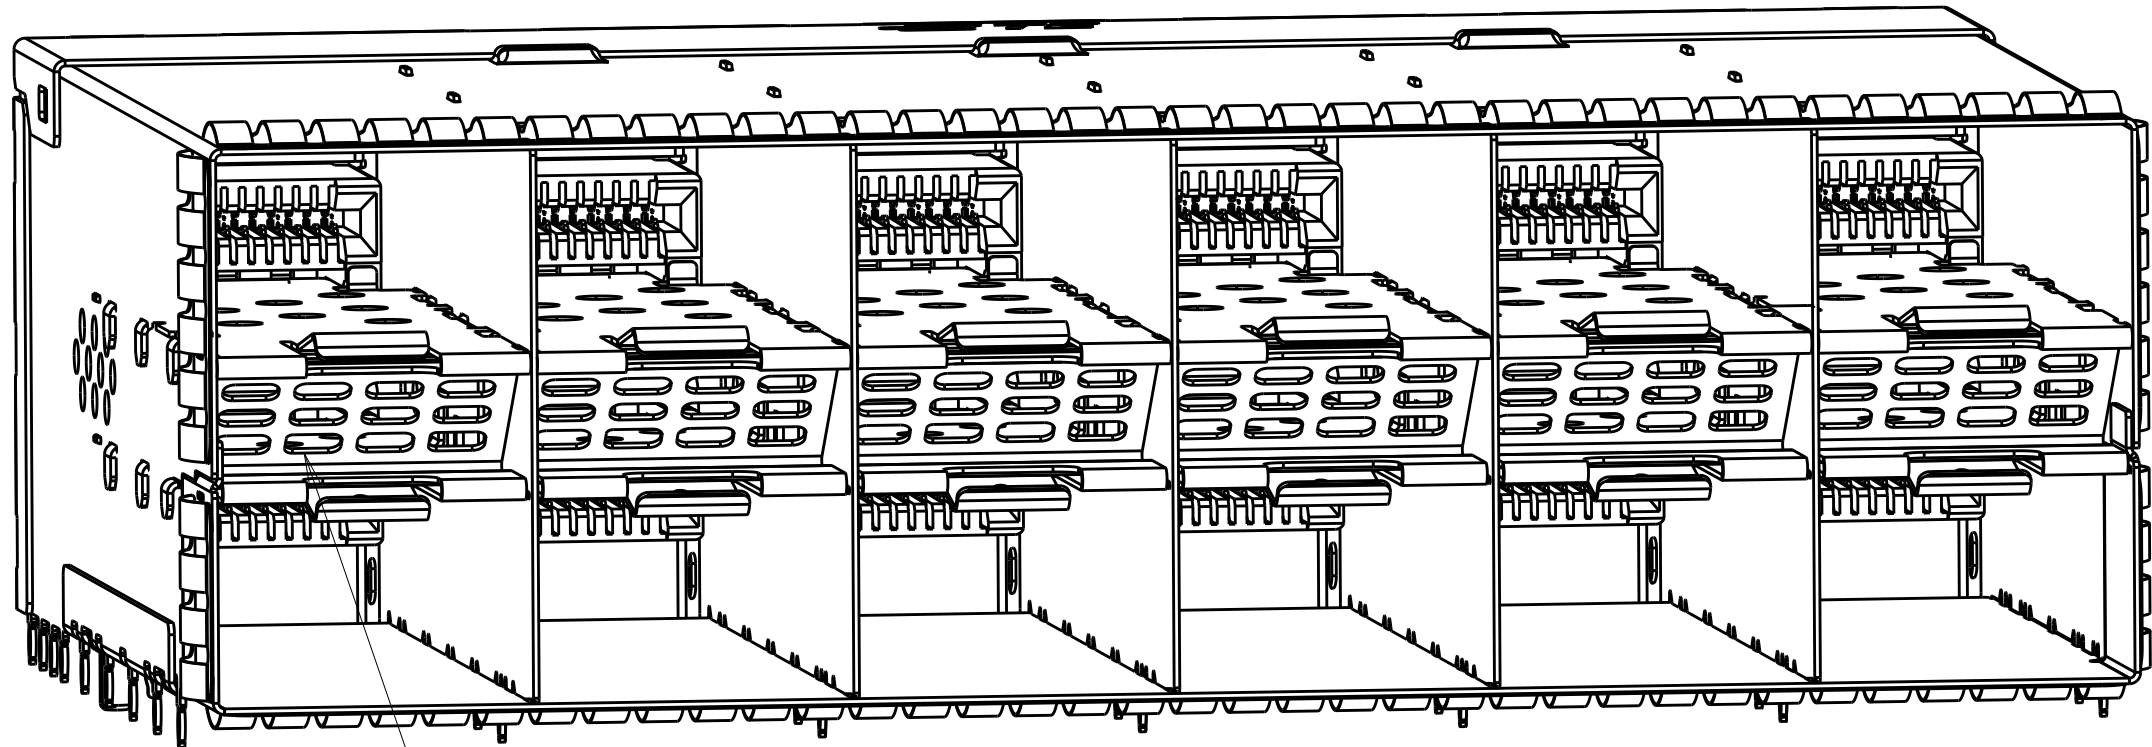


AIR VENTS


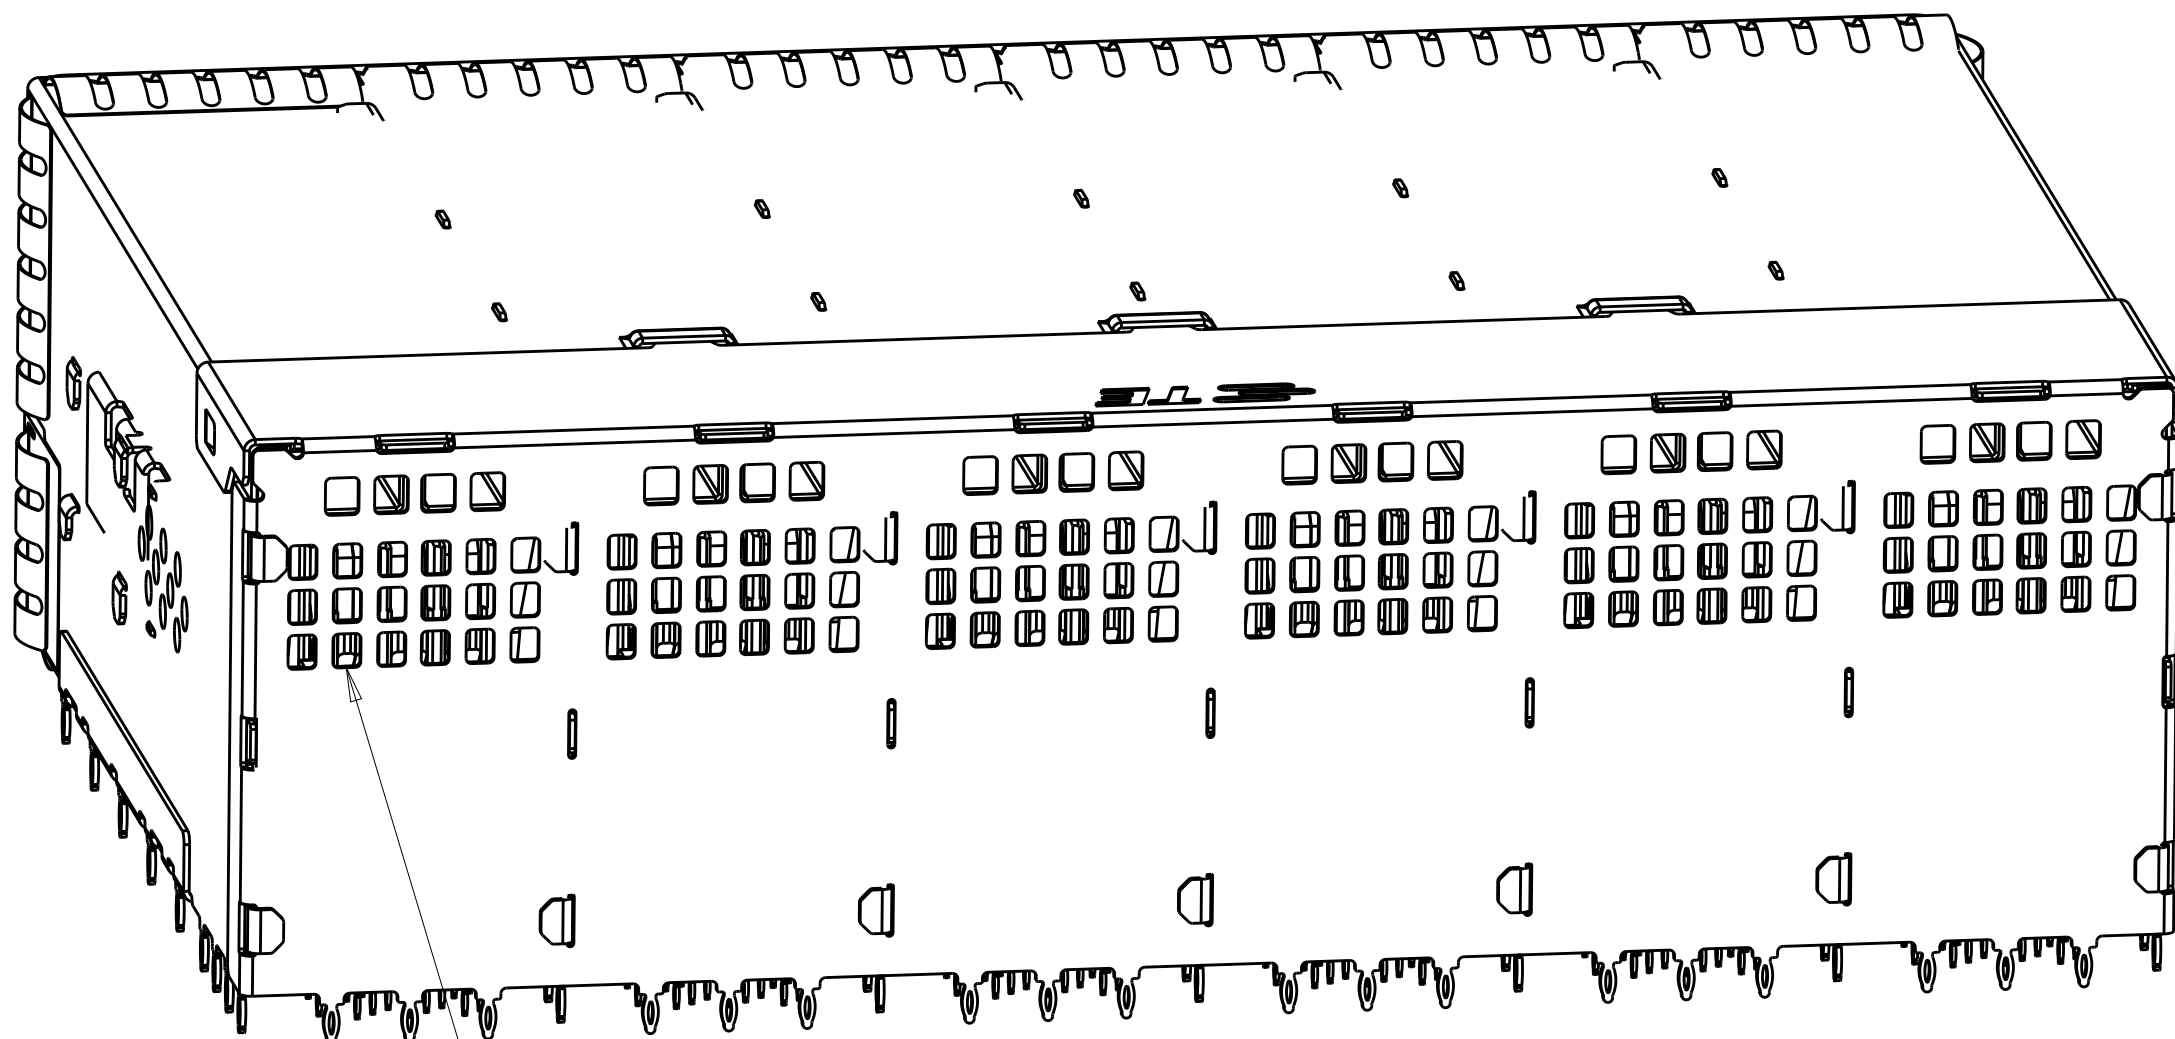


AIR VENTS



3-2198339-1
EMI SPRING TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER 07DEC2011	 TE Connectivity	
DIMENSIONS:		CHK M.D. MORRISON 13DEC2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON 13DEC2011	NAME RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	
	0 PLC	±	PRODUCT SPEC	SIZE
	1 PLC	±0.20	108-2481	CAGE CODE
	2 PLC	±0.15	APPLICATION SPEC	DRAWING NO
	3 PLC	±0.10	114-13319	RESTRICTED TO
MATERIAL		WEIGHT	A100779C=2198339	
SEE NOTES		SEE NOTES	Customer Drawing	
			SCALE	1:1
			SHEET	2
			OF	6
			REV	B2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

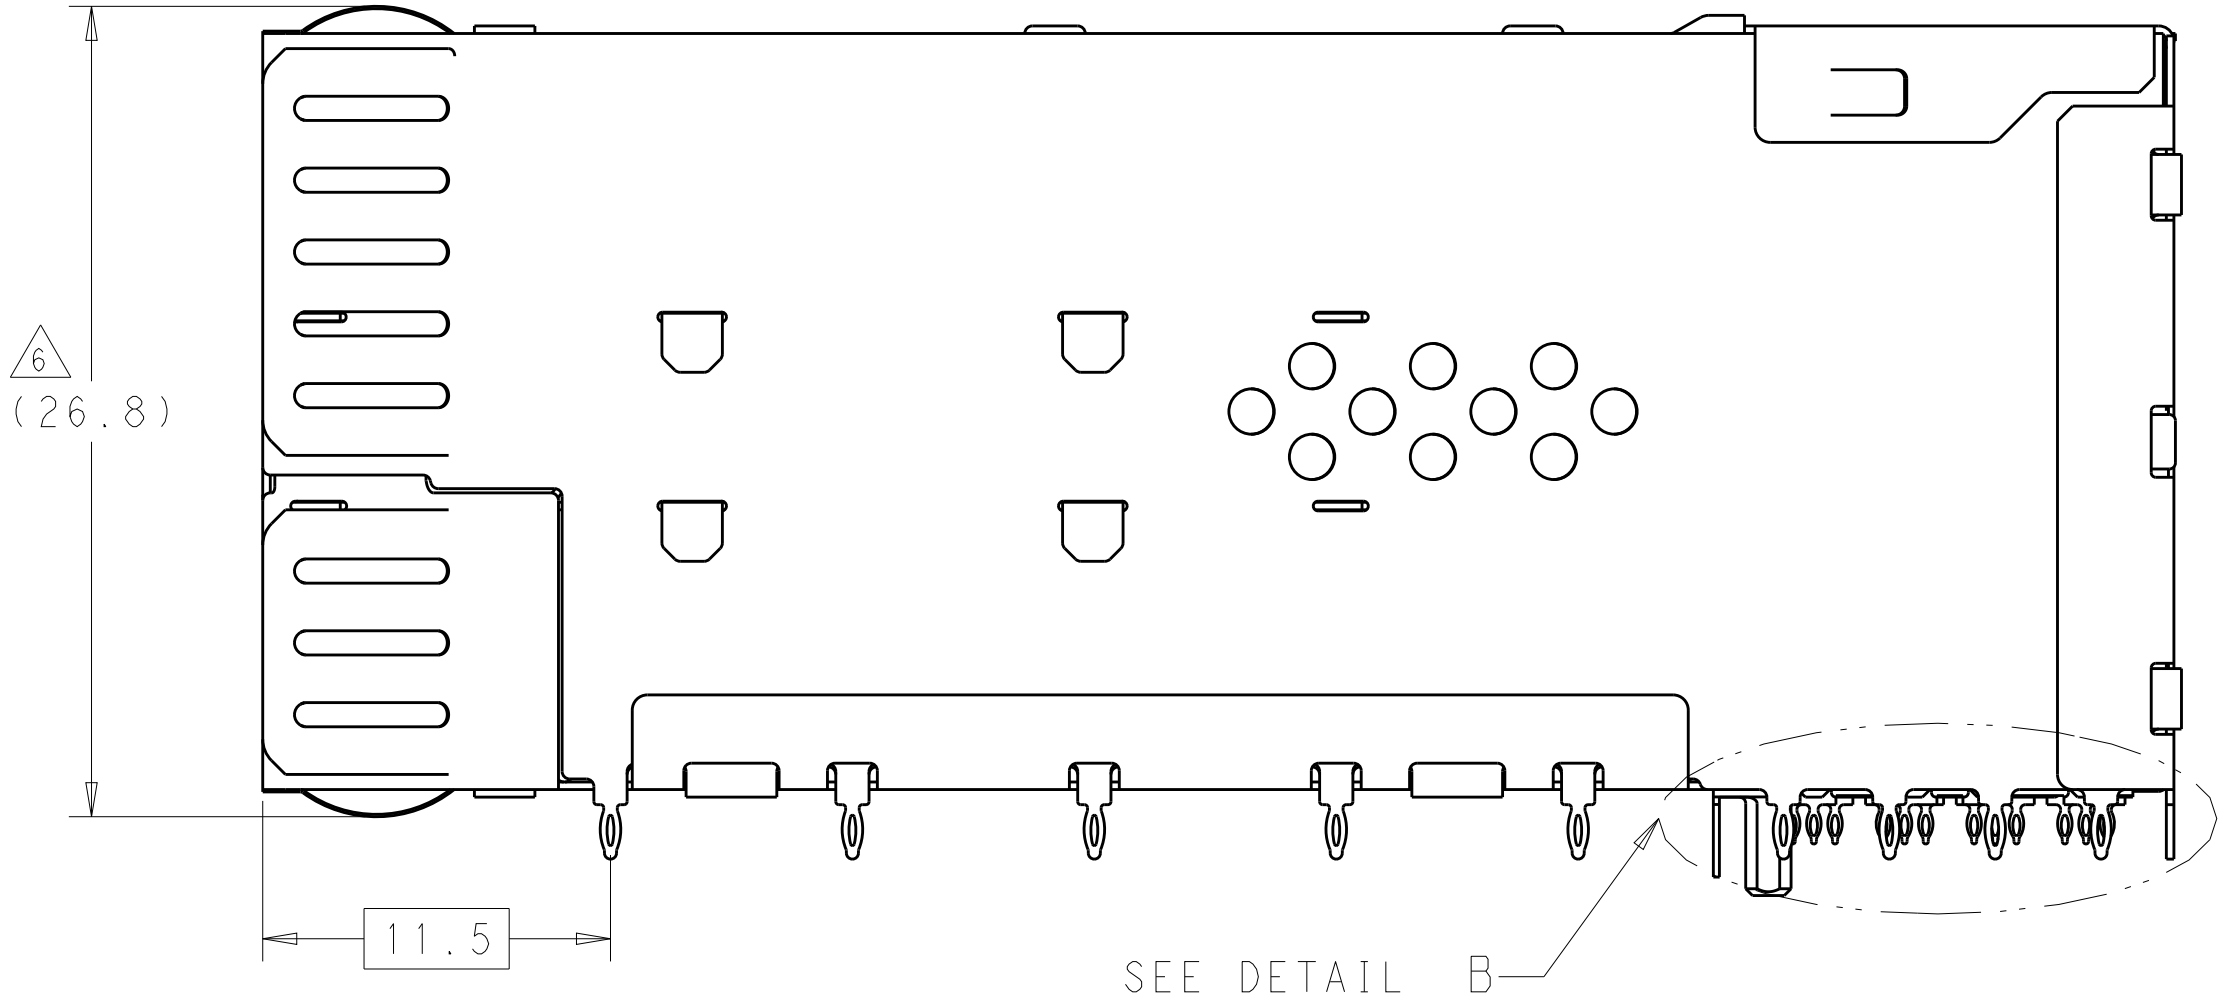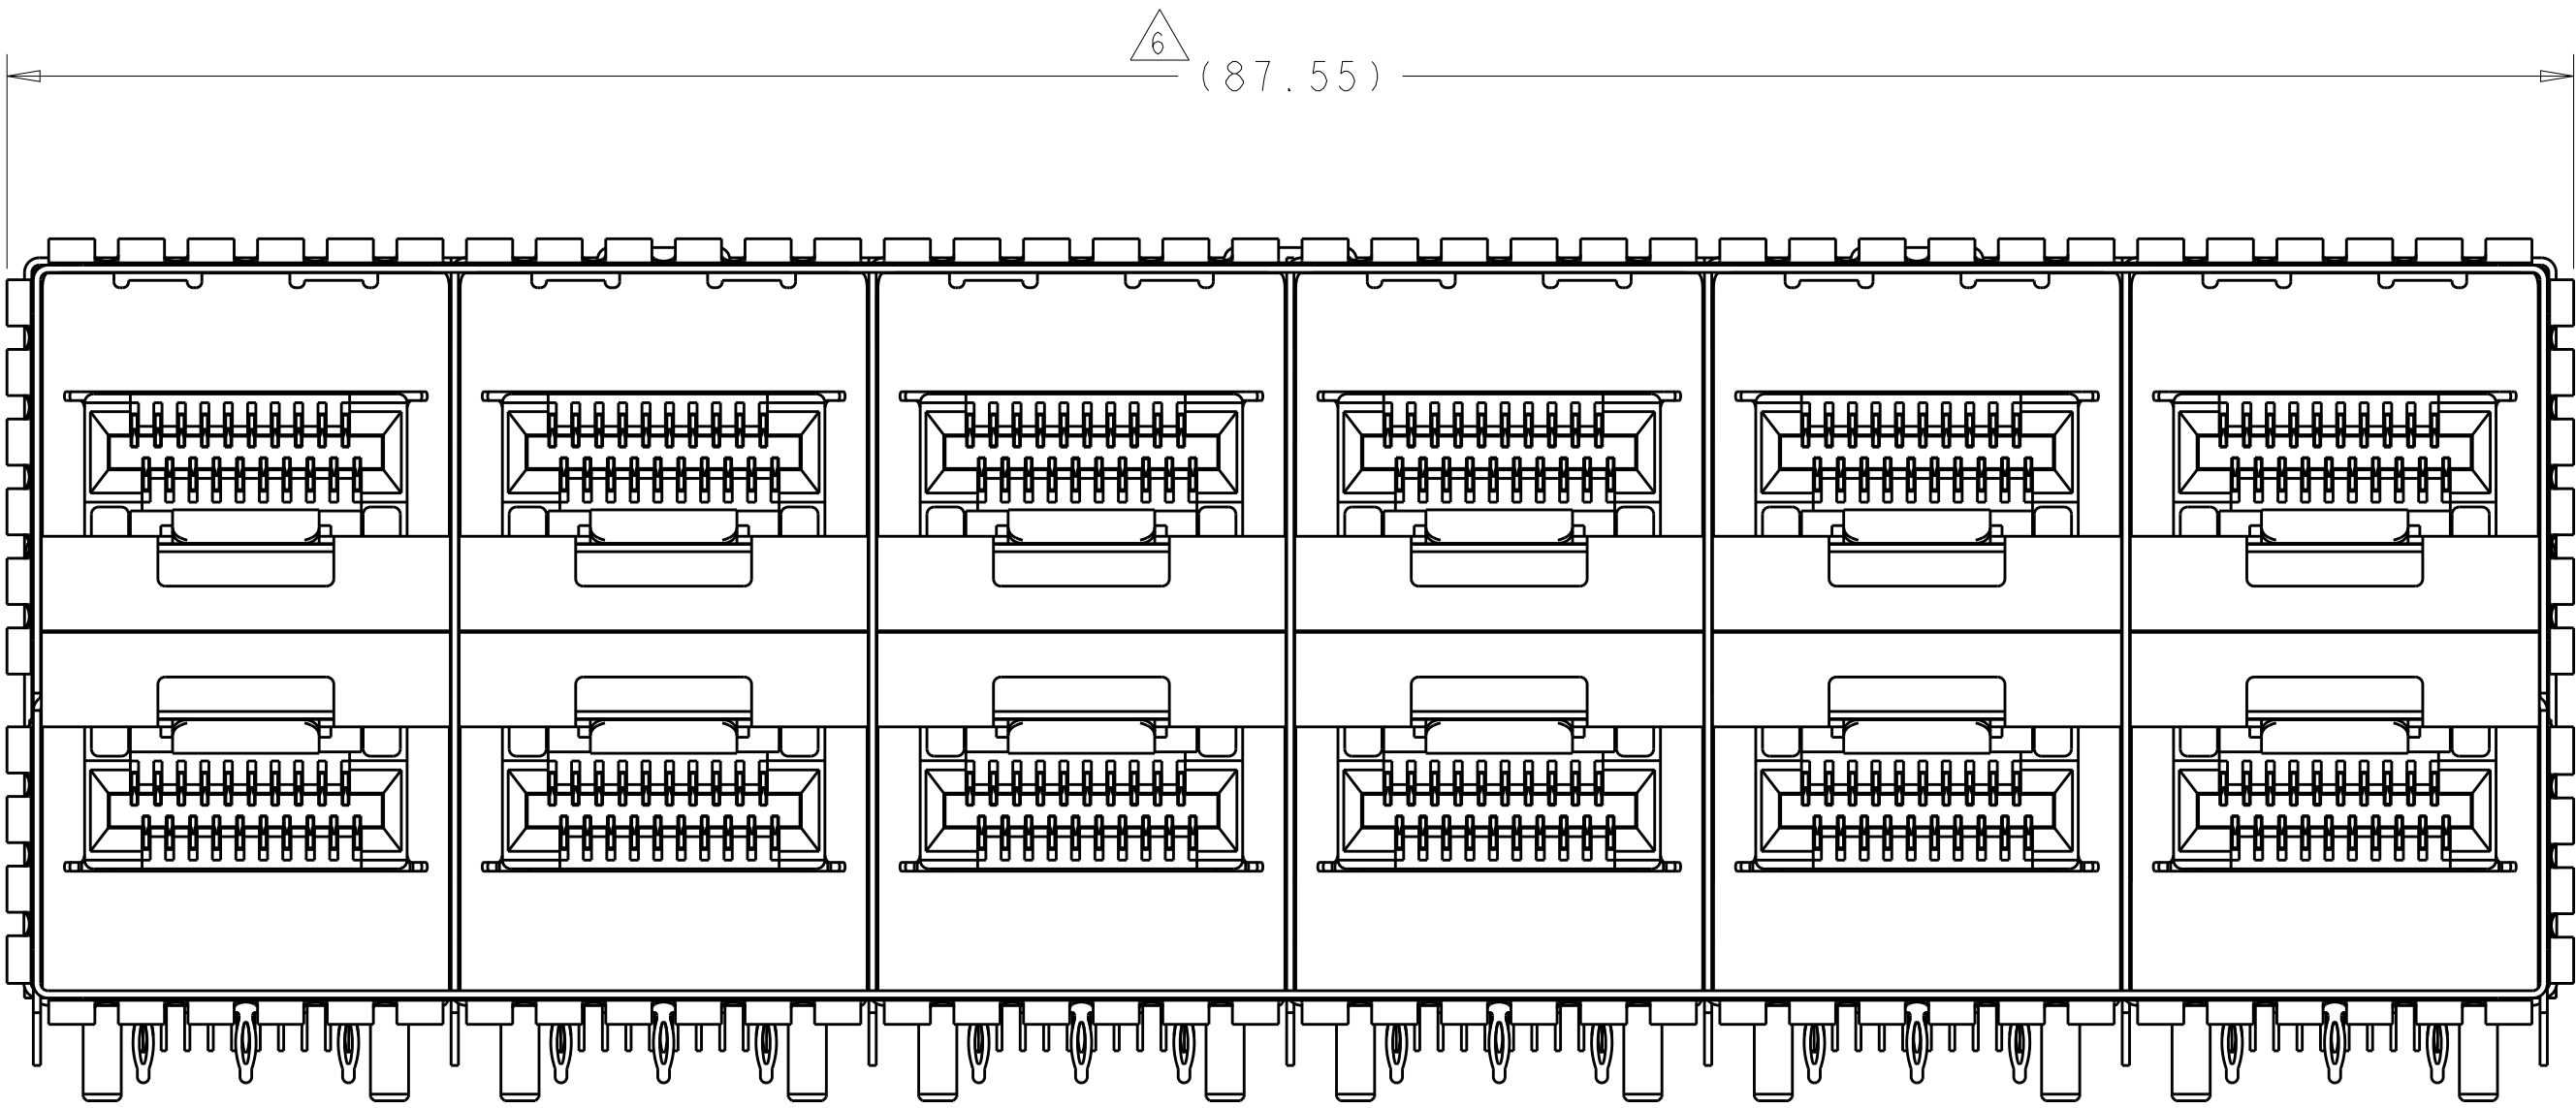





2198339-5 THRU 2198339-8, 1-2198339-9, 2-2198339-0, 2-2198339-1
EMI SPRINGS ONLY
SCALE 4:1

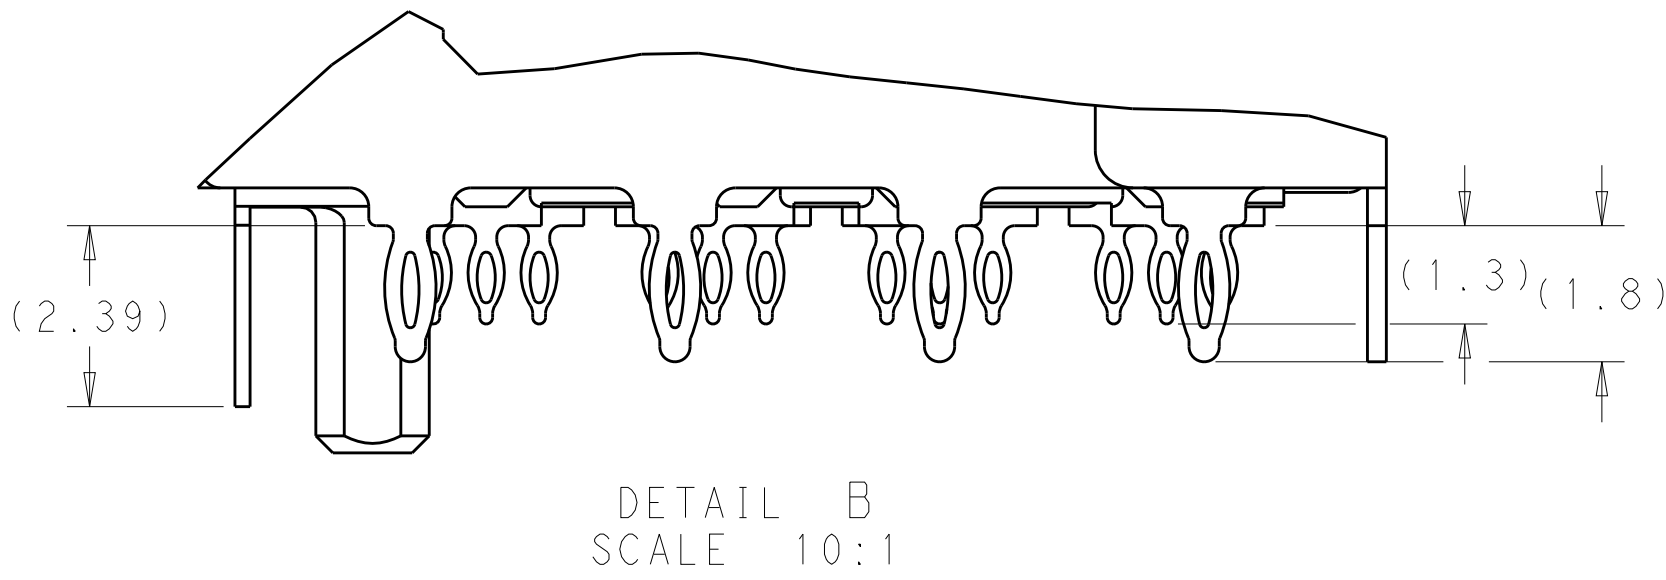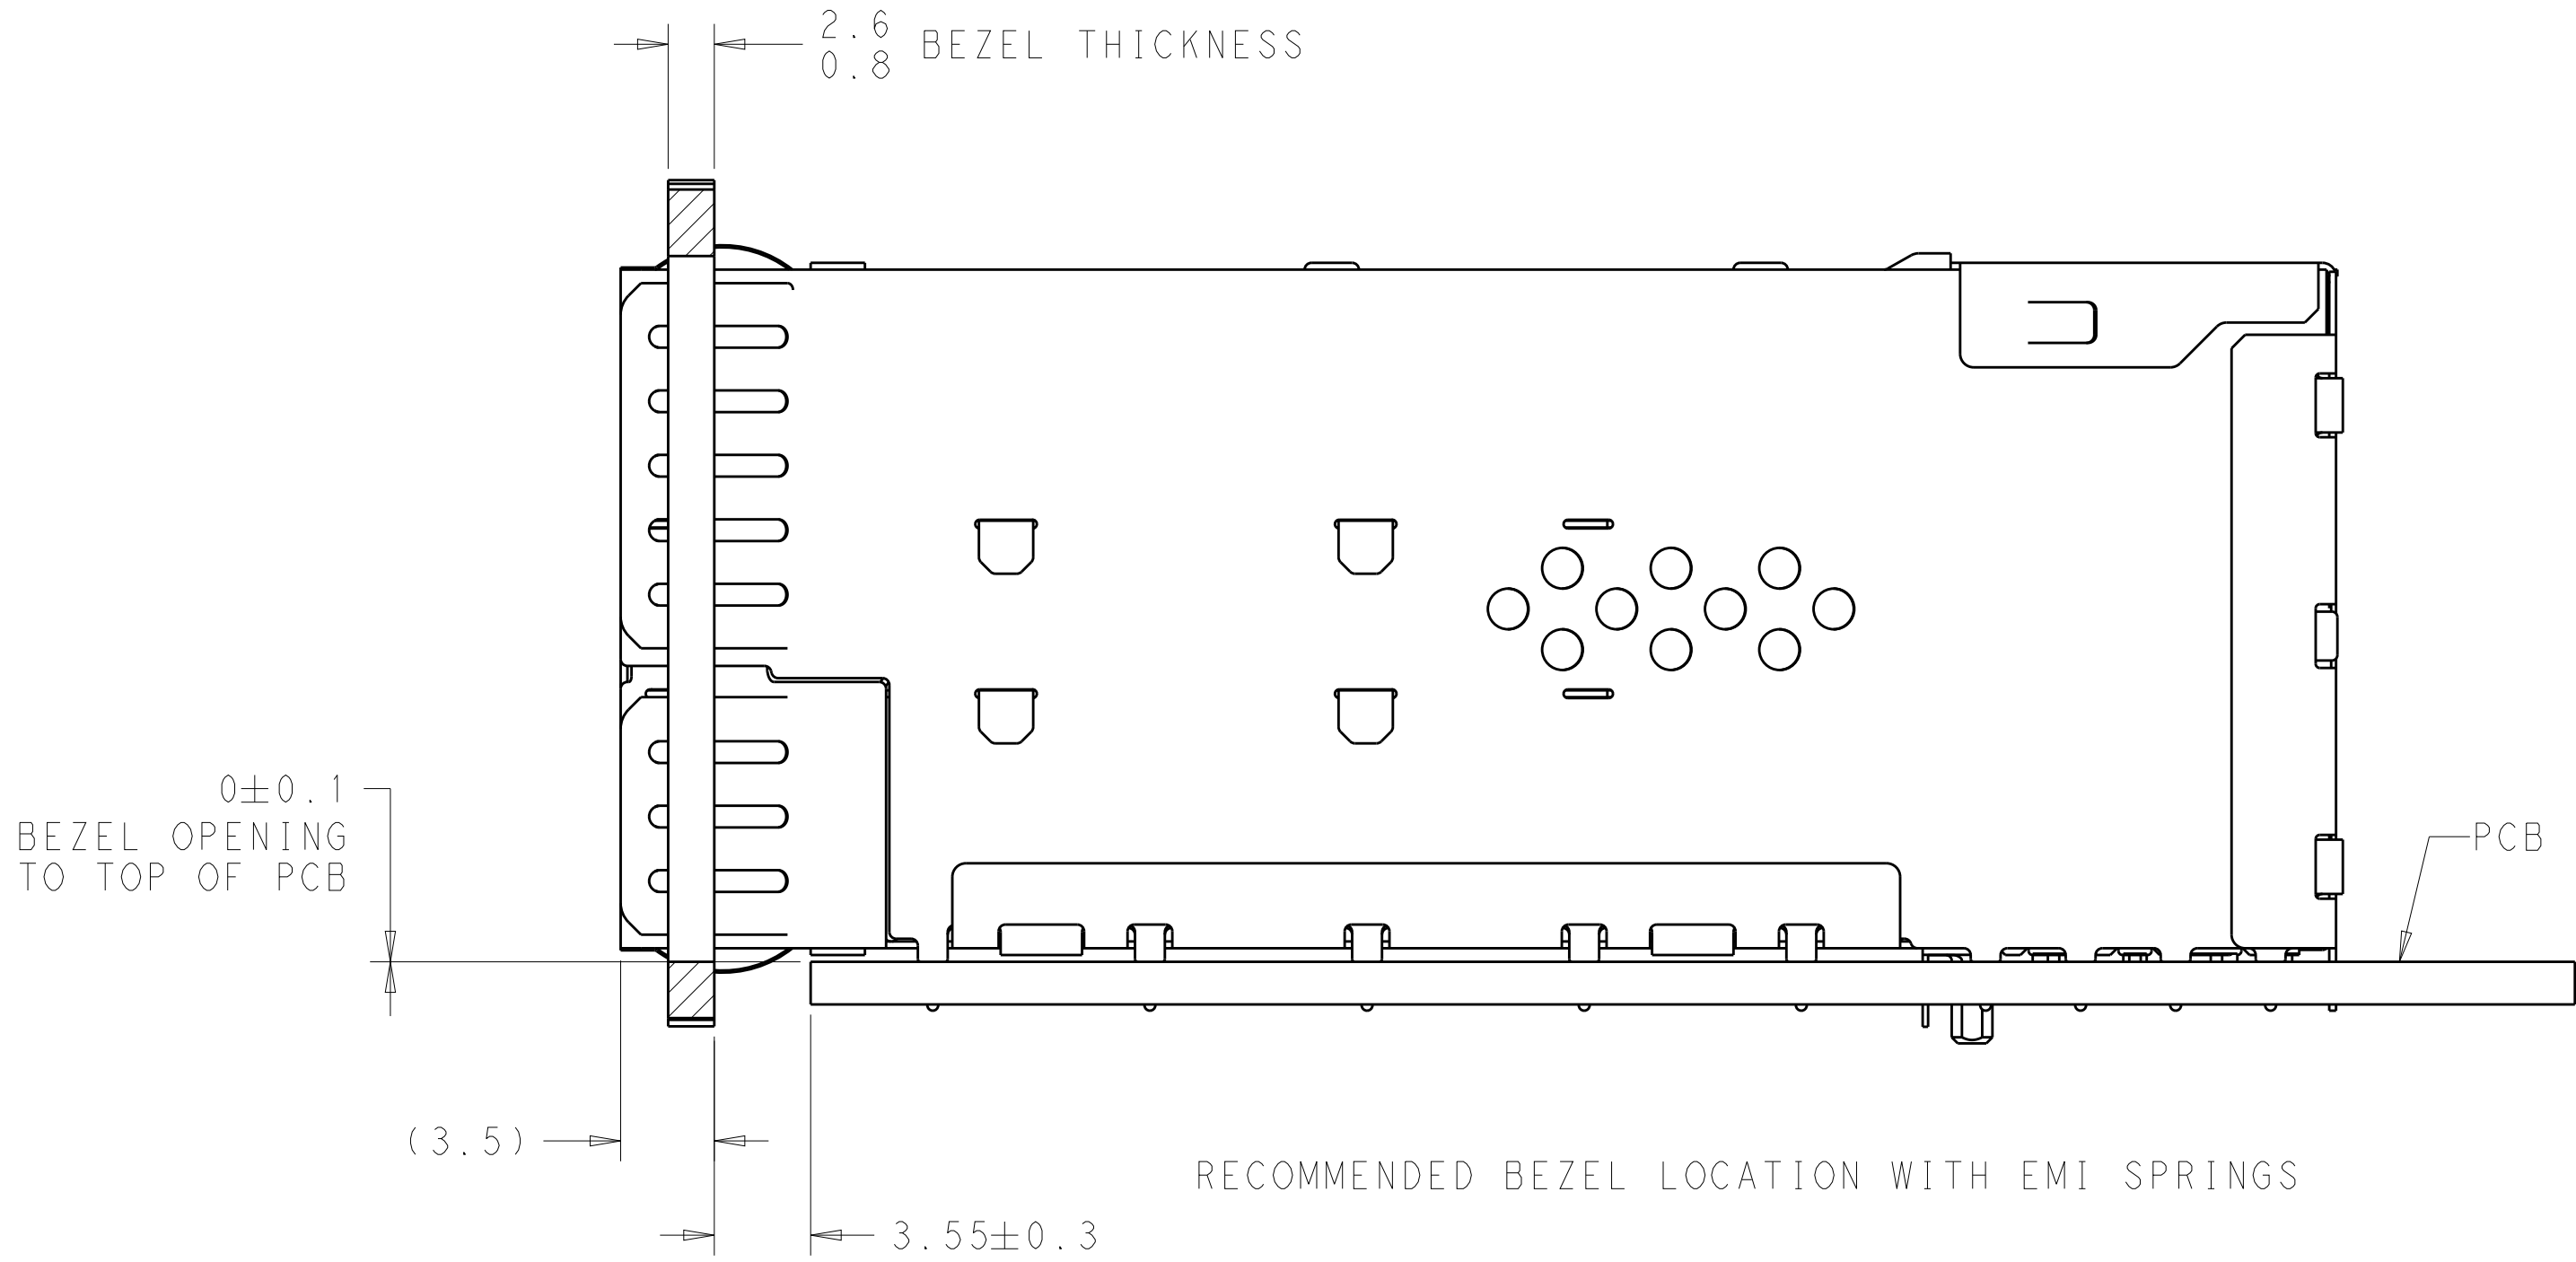

DETAIL B
SCALE 10:1


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER CHK M.D. MORRISON APVD M.D. MORRISON	07DEC2011 13DEC2011 13DEC2011	TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME		
mm	0 PLC ±.20 1 PLC ±0.20 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±.10	108-2481	RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	SIZE	CAGE CODE
	ANGLES ±.5°	APPLICATION SPEC	-	DRAWING NO	RESTRICTED TO
MATERIAL	SEE NOTES	WEIGHT	A100779	©=2198339	-
SEE NOTES	SEE NOTES	Customer Drawing	SCALE	1:1	SHEET 3 OF 6
					REV B2

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

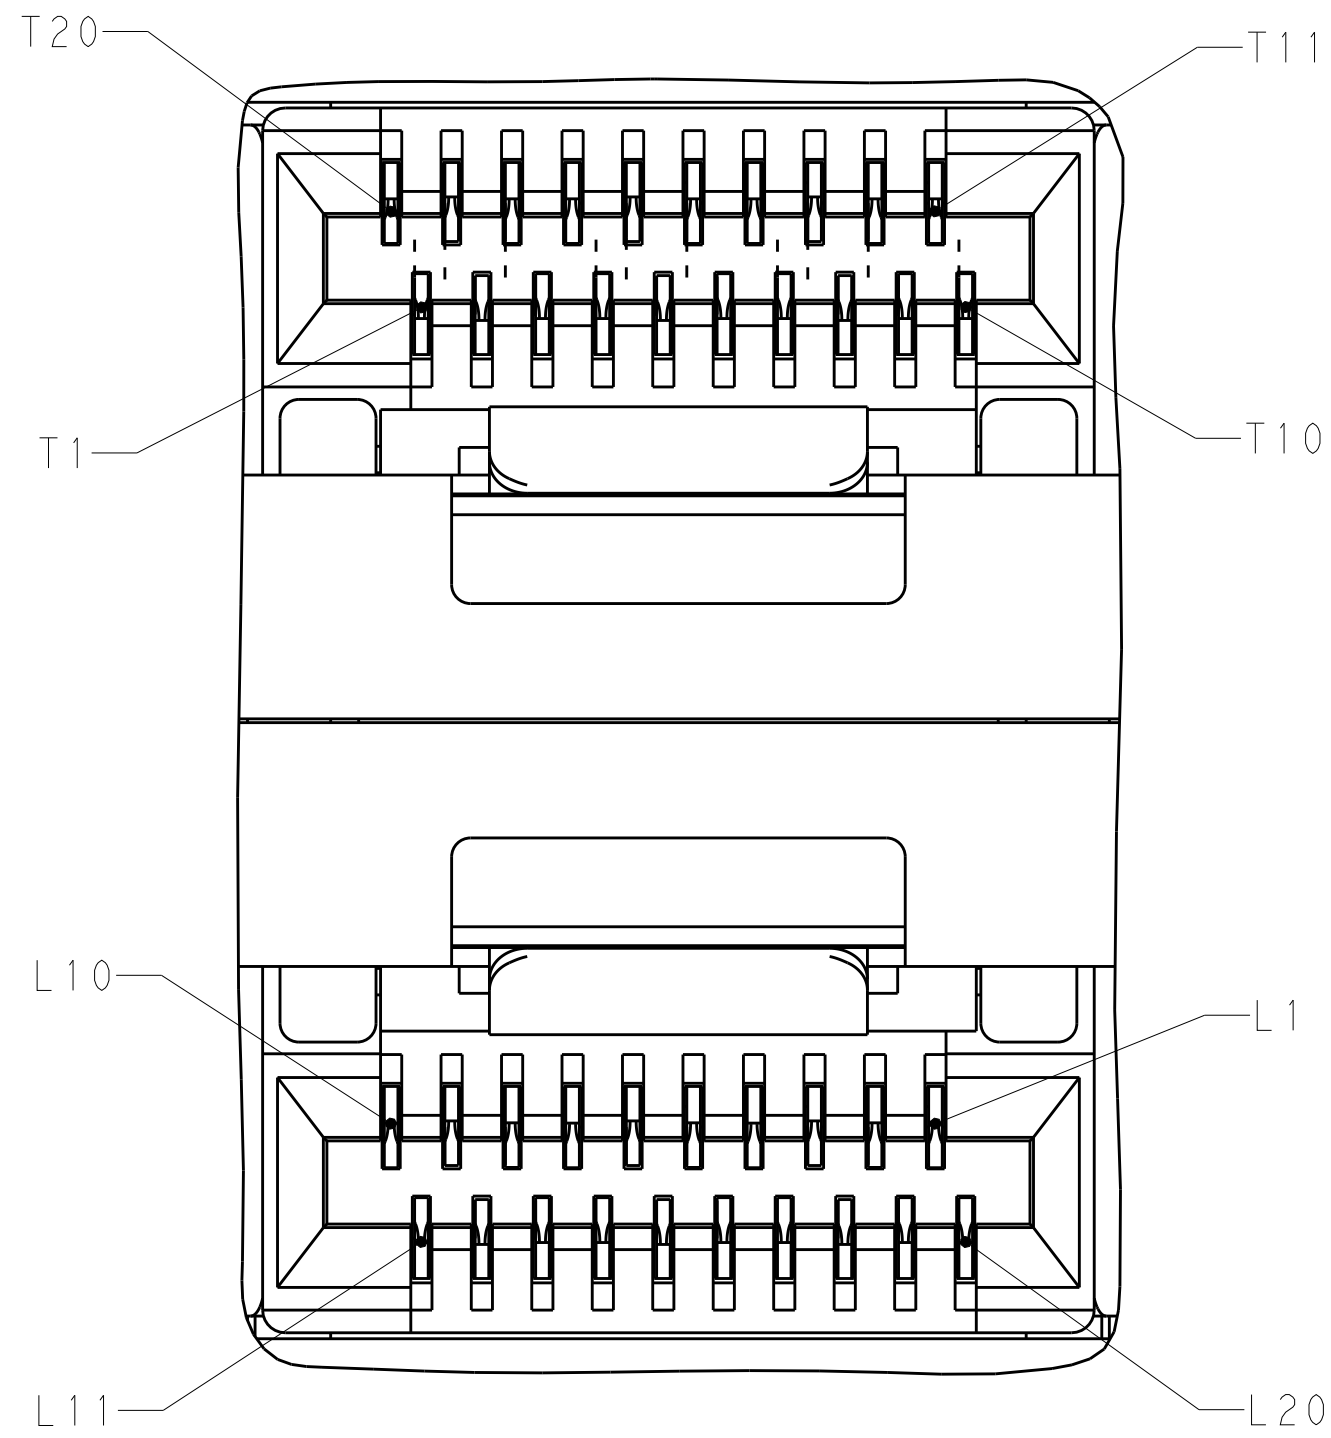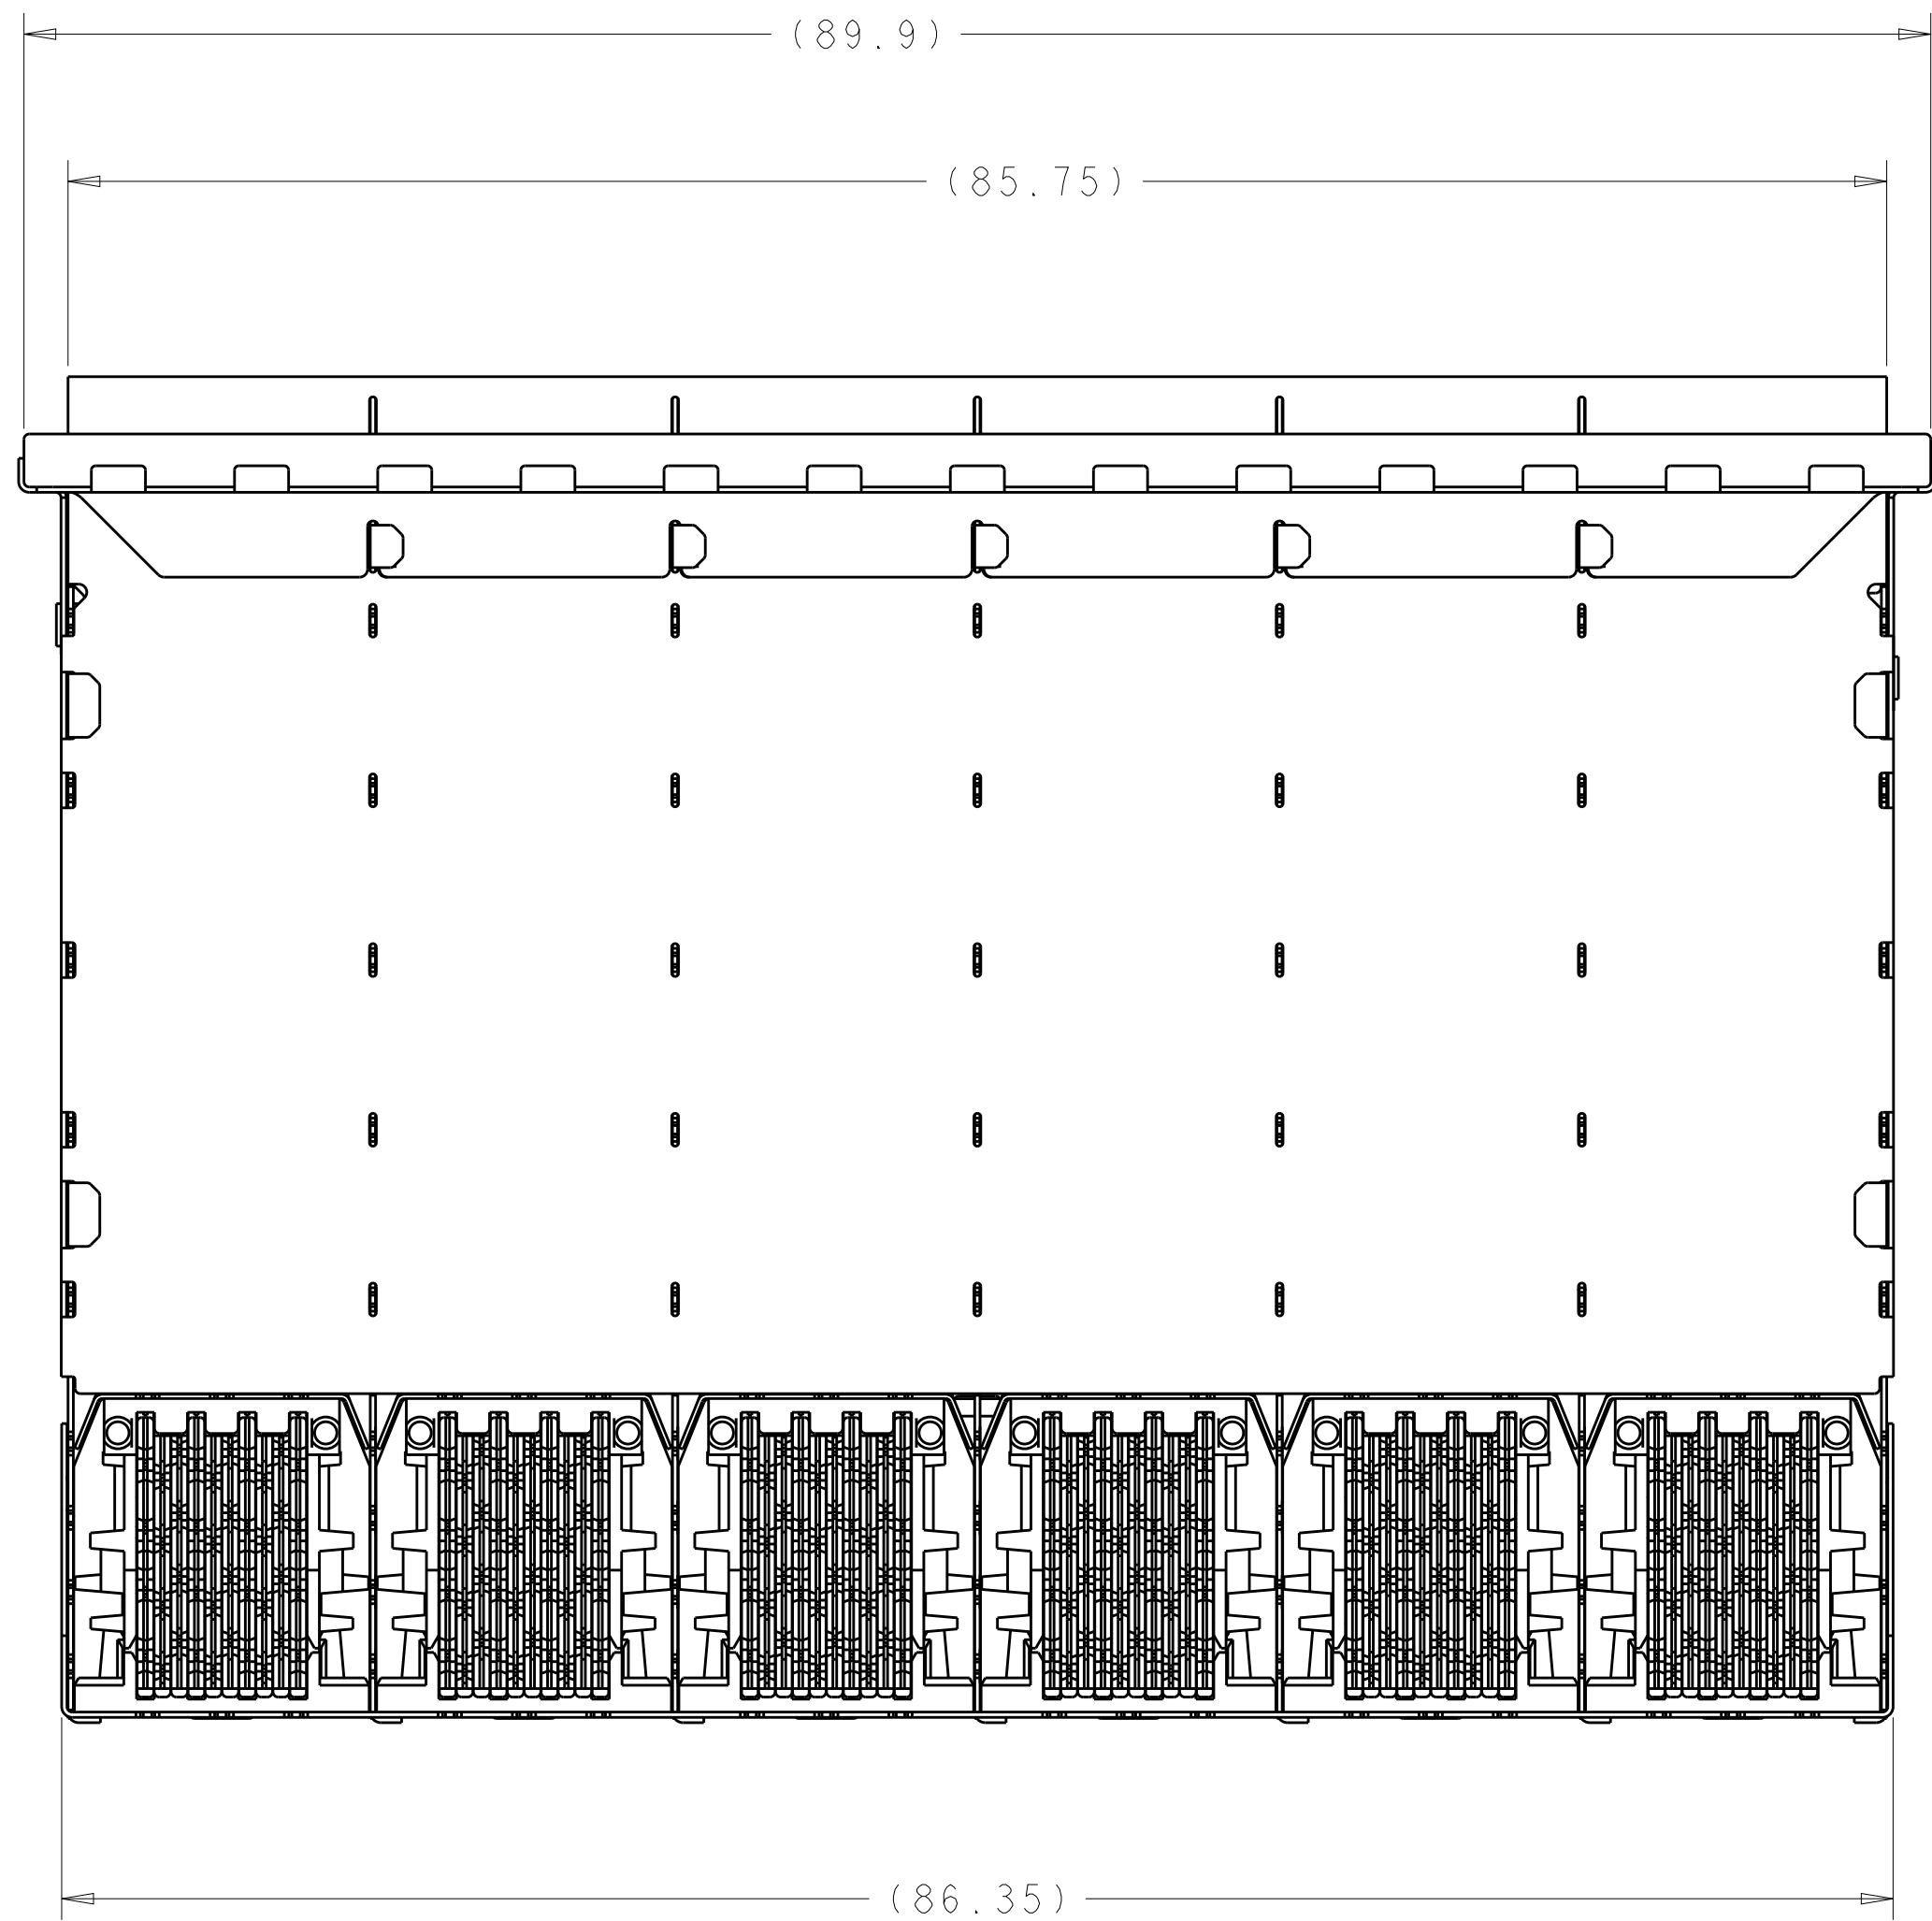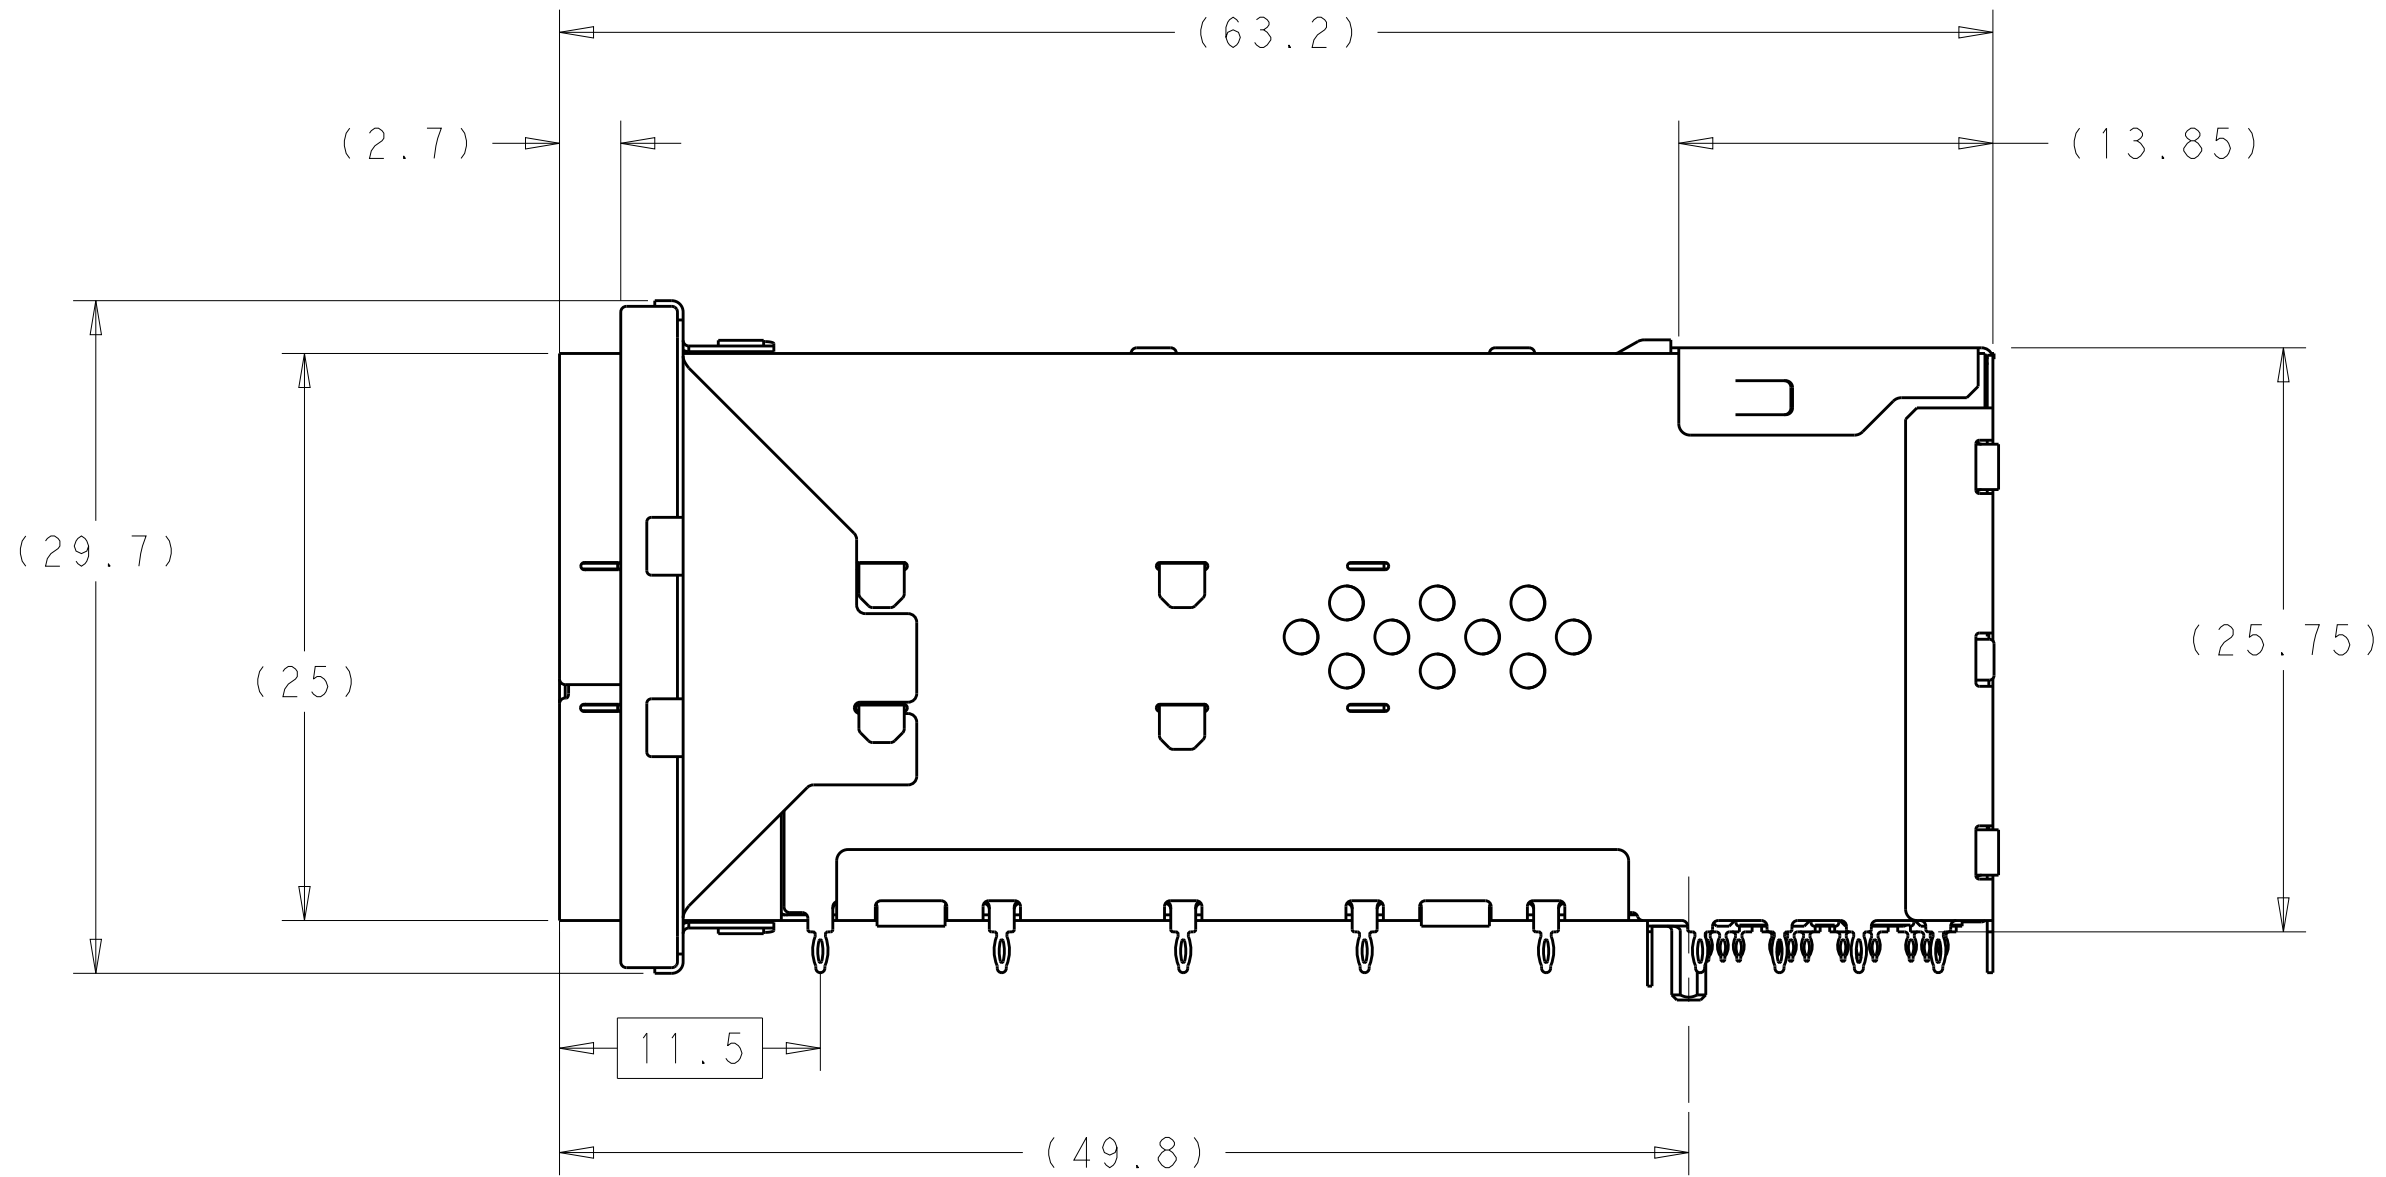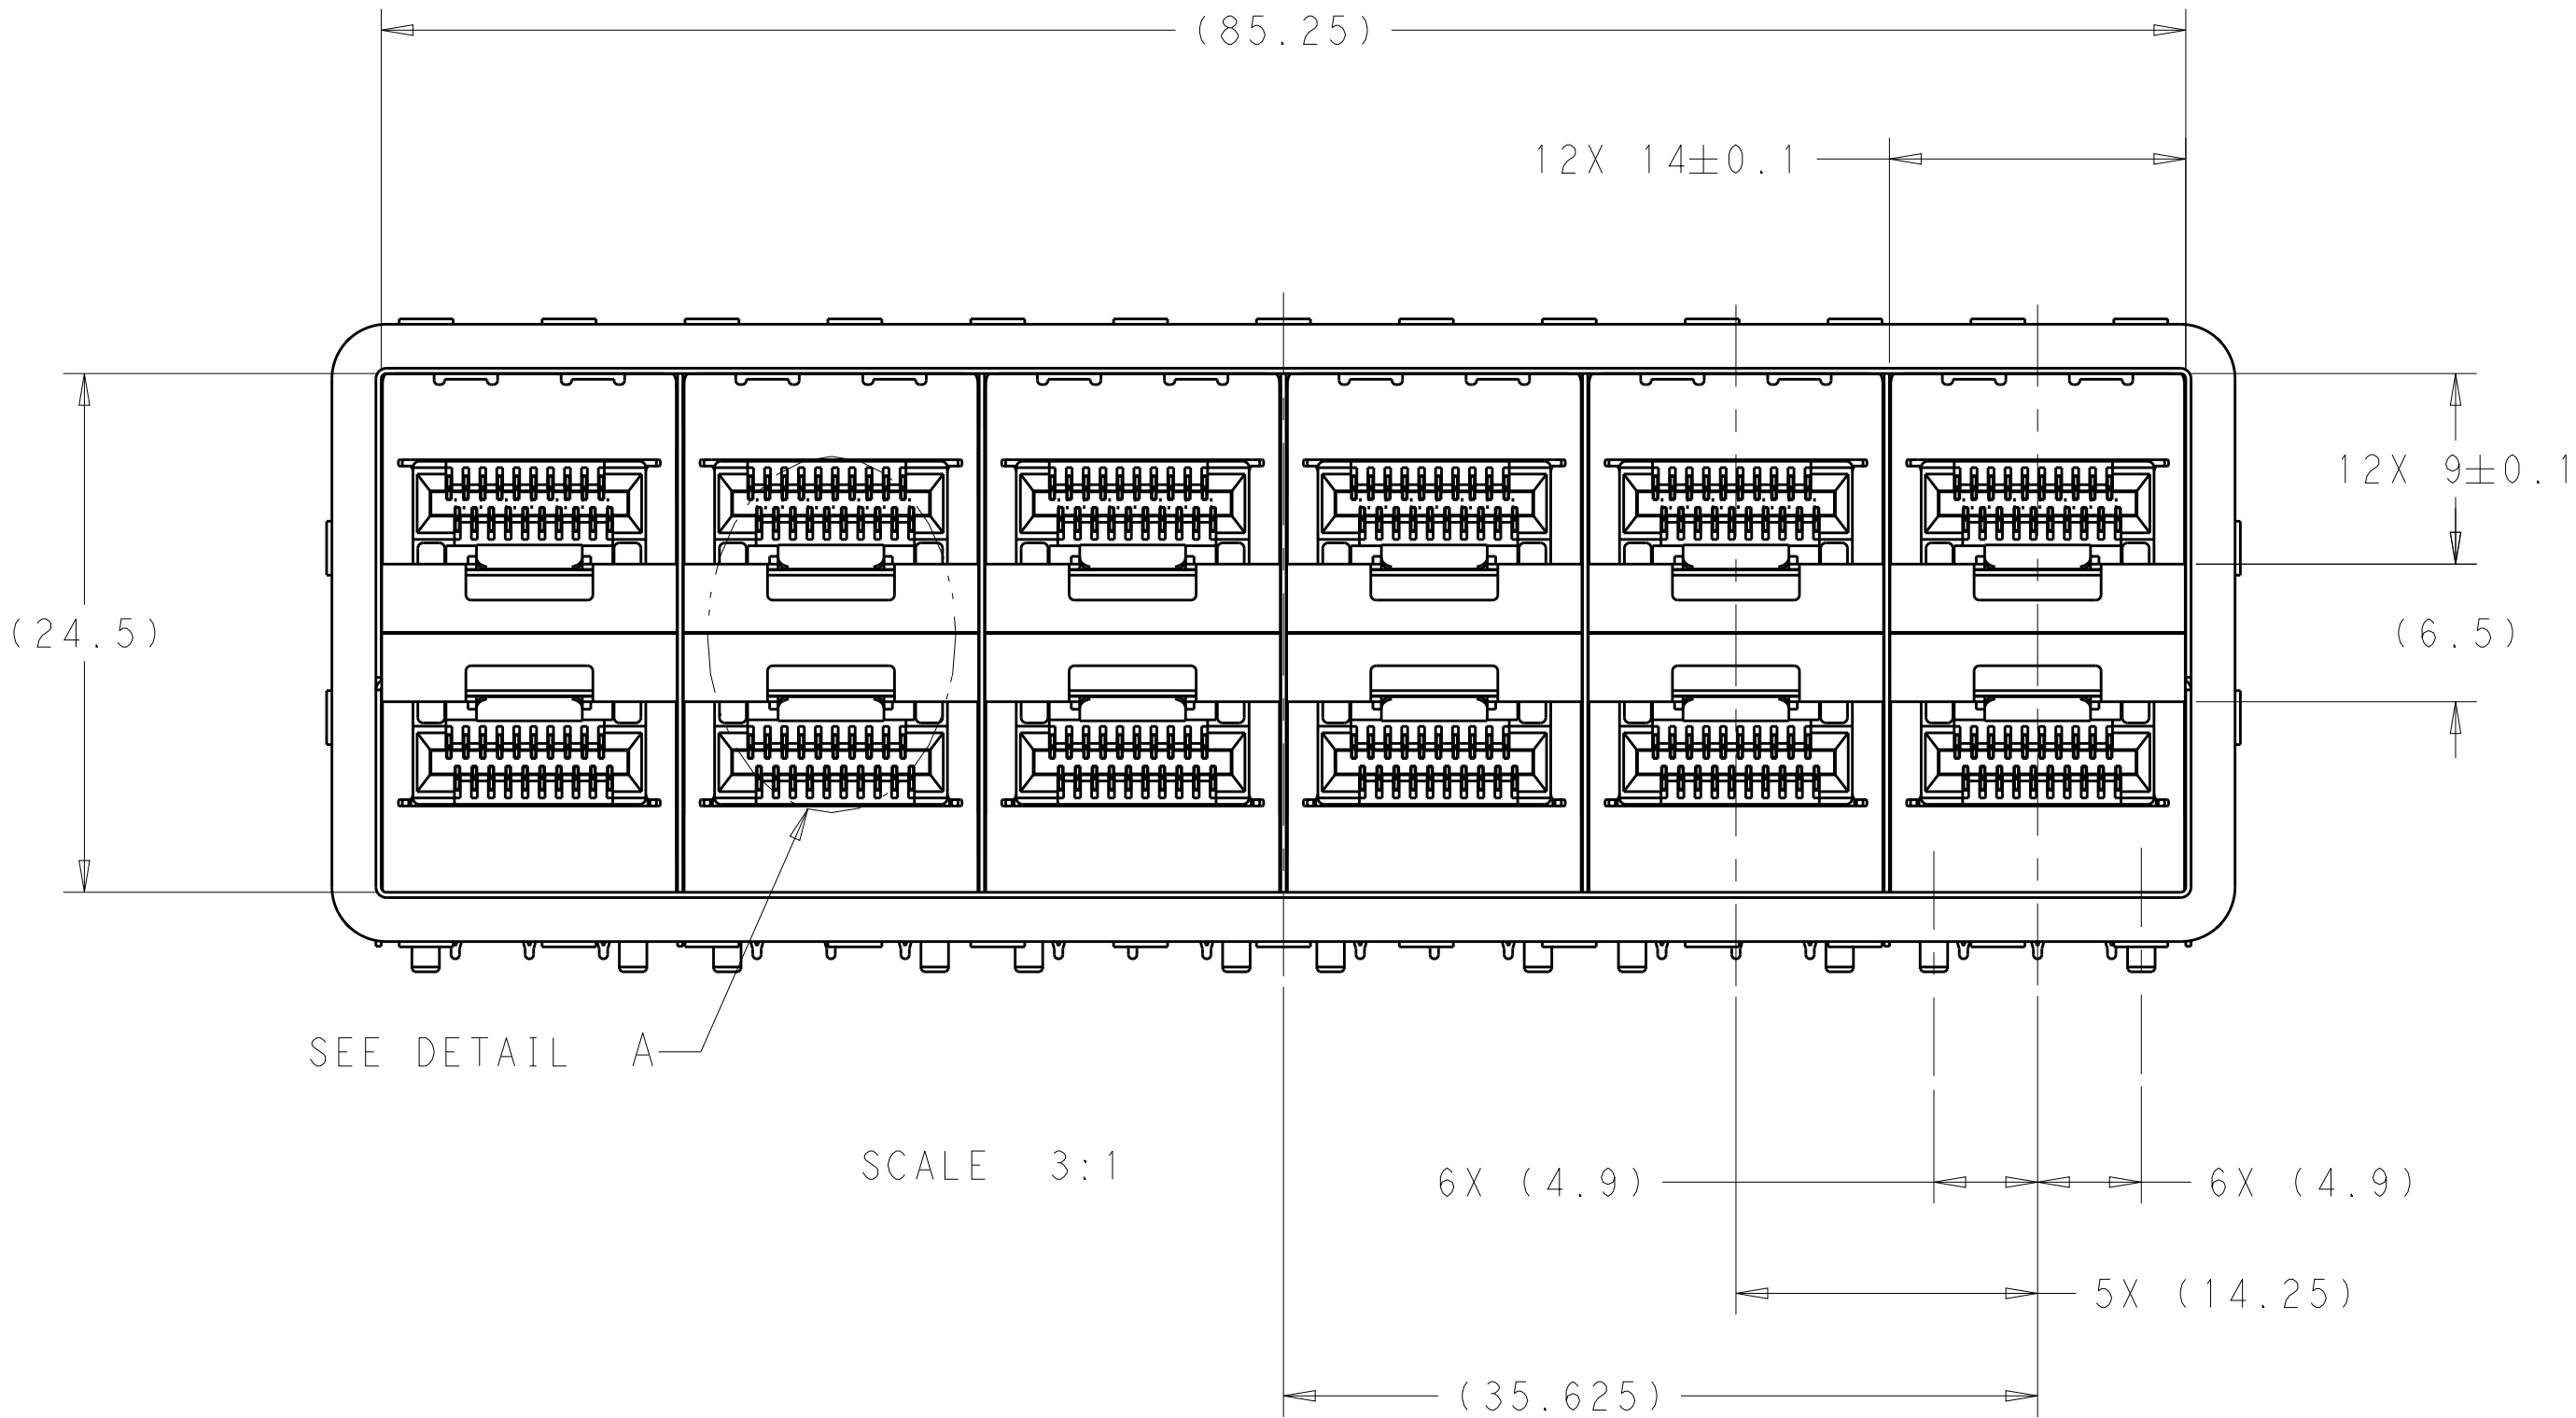


DETAIL A
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER CHK M.D. MORRISON APVD M.D. MORRISON	07DEC2011 13DEC2011 13DEC2011	TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME		
mm	0 PLC ±.20 1 PLC ±0.20 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±.10 ANGLES ±.5° FINISH	108-2481	RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	SIZE	CAGE CODE
MATERIAL	SEE NOTES	114-13319	Customer Drawing	DRAWING NO	RESTRICTED TO
SEE NOTES	SEE NOTES	WEIGHT	A100779	©=2198339	-
		SCALE	1:1	SHEET	4 OF 6
		REV	B2		

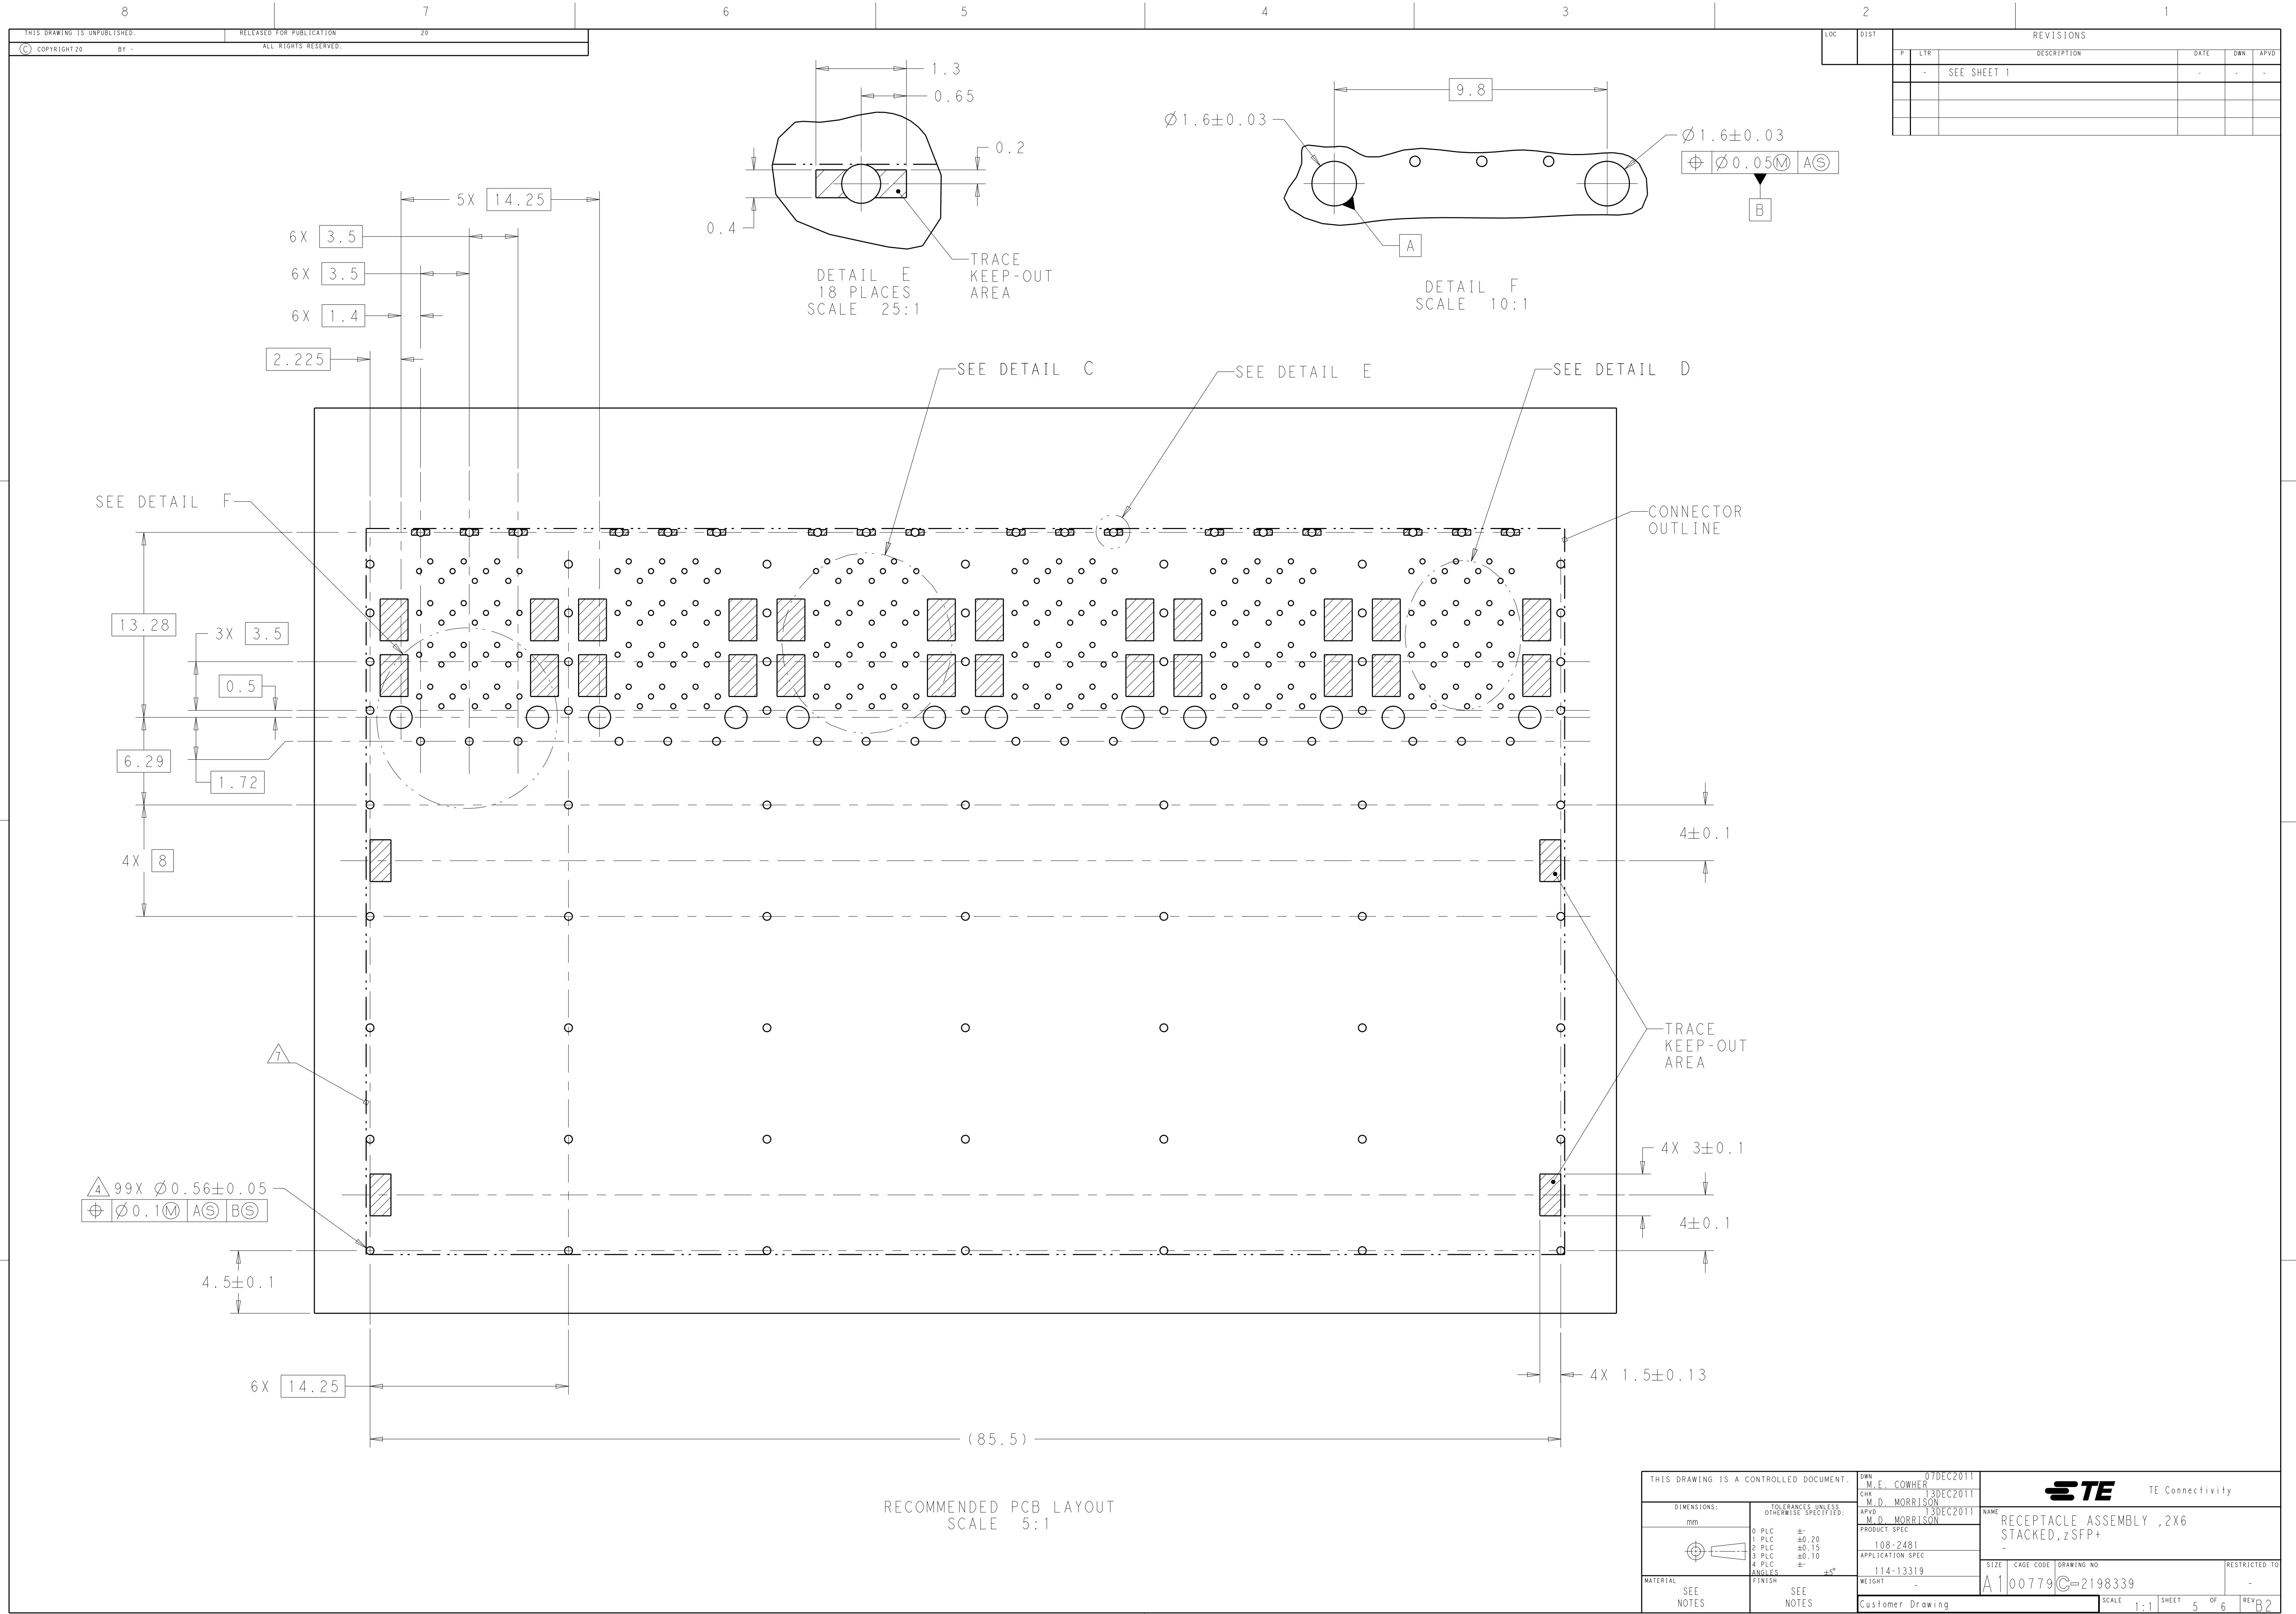


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. E. CONNER CHK M. D. MORRISON APVD M. D. MORRISON	07DEC2011 13DEC2011 13DEC2011	 TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm				RECEPTACLE ASSEMBLY ,2X6 STACKED, zSFP+	
		0 PLC ±0.20 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±0.10 ANGLES ±4°		PRODUCT SPEC	
		108-2481		SIZE	
		APPLICATION SPEC		CASE CODE	
		114-13319		DRAWING NO	
MATERIAL		WEIGHT		RESTRICTED TO	
SEE NOTES		A100779		©=2198339	
SEE NOTES		Customer Drawing		SCALE 1:1 SHEET 5 OF 6 REV B2	

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

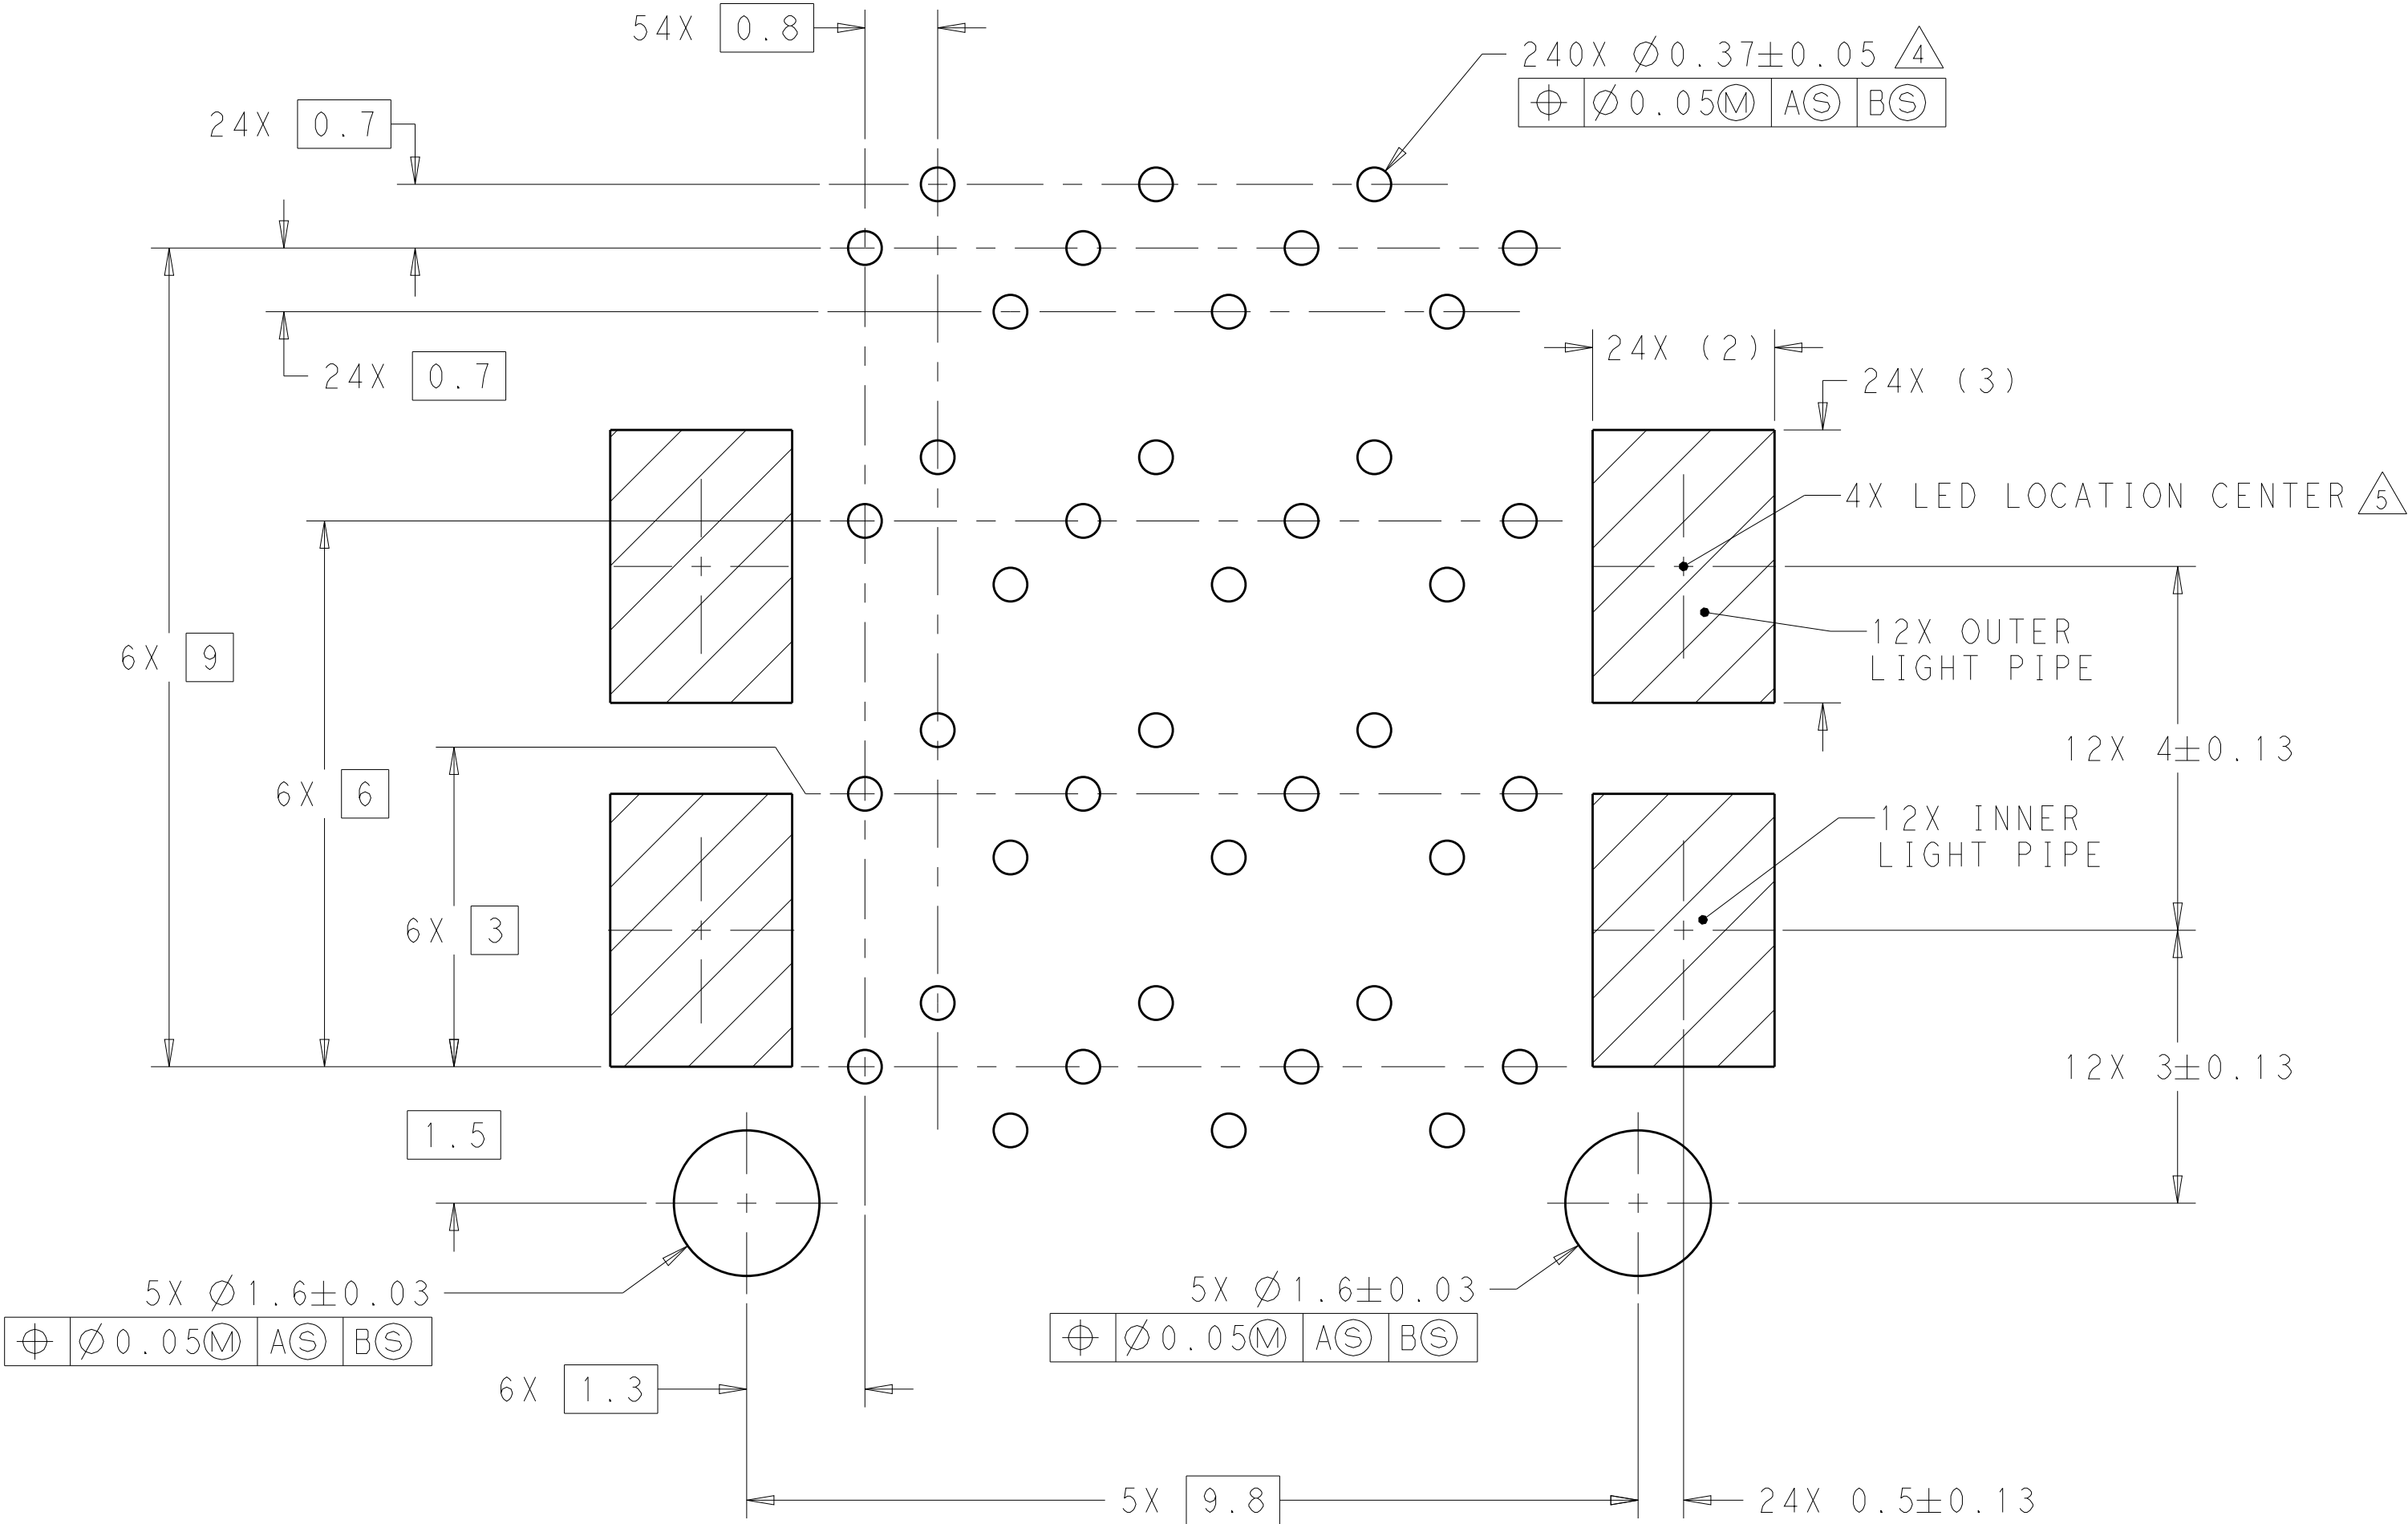


DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 15:1

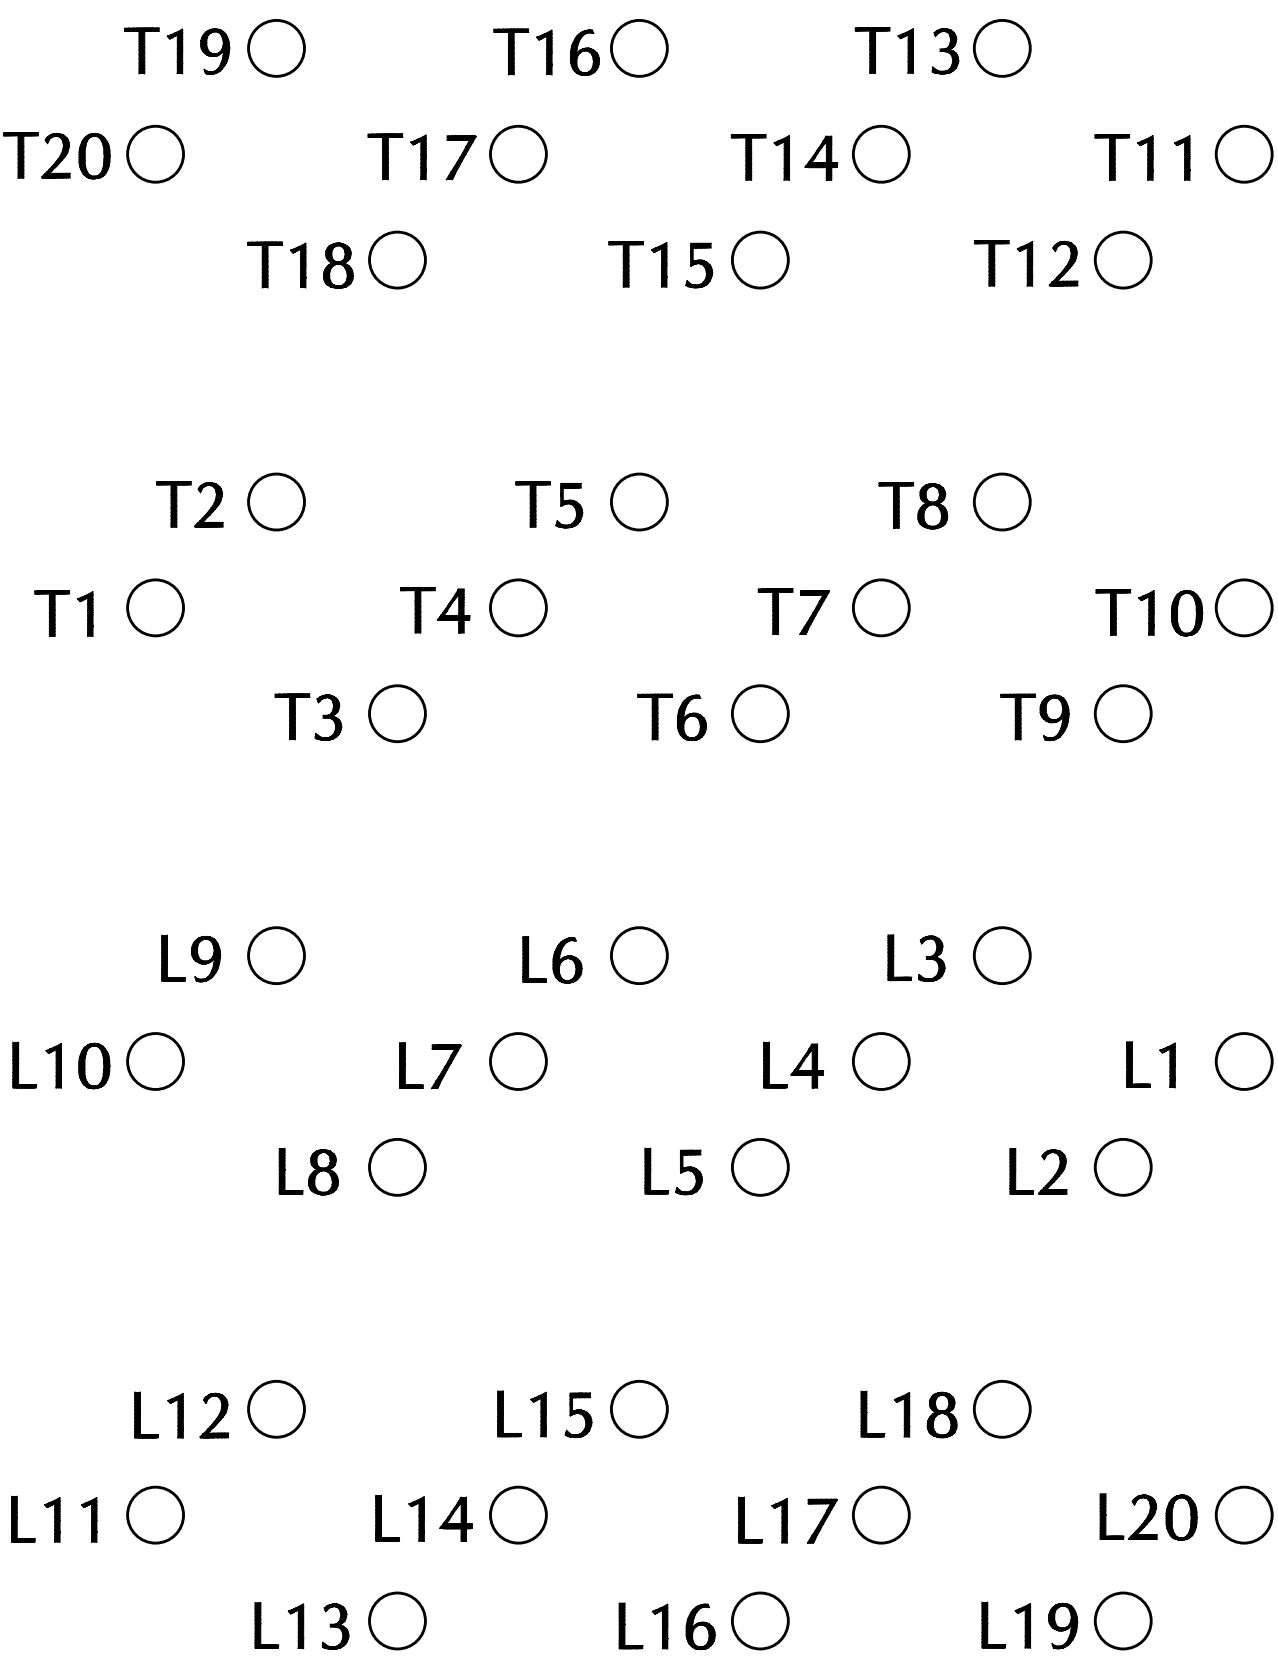

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:2

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

DETAIL D
PIN MAP
6 PLACES
SCALE 20:1

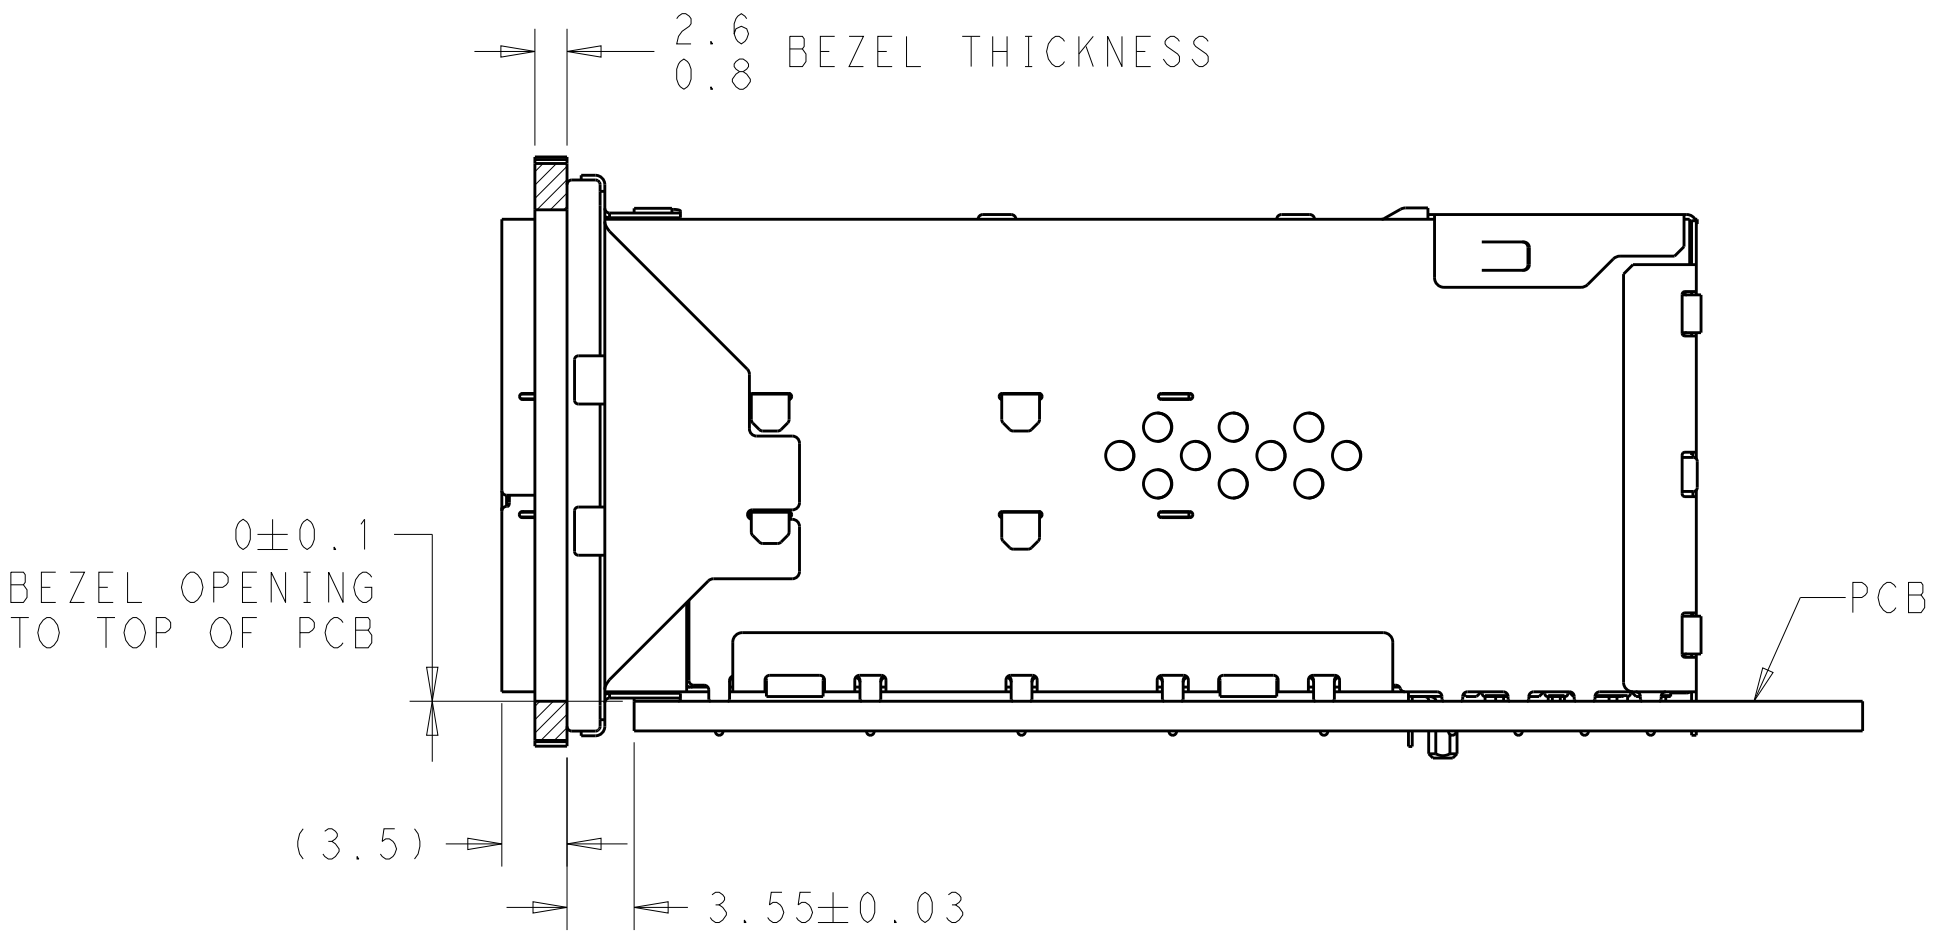

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 5:2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER 07DEC2011	TE Connectivity
DIMENSIONS:		CHK M.D. MORRISON 13DEC2011	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON 13DEC2011	NAME RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+
	0 PLC ±.20 1 PLC ±0.15 2 PLC ±0.10 3 PLC ±.10 4 PLC ±.10 ANGLES ±4° FINISH	PRODUCT SPEC 108-2481 APPLICATION SPEC 114-13319 WEIGHT -	
MATERIAL SEE NOTES	SEE NOTES	Customer Drawing	SIZE A100779
		DRAWING NO. C=2198339	RESTRICTED TO -
		SCALE 1:1	SHEET 6 OF 6
		REV B2	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru