
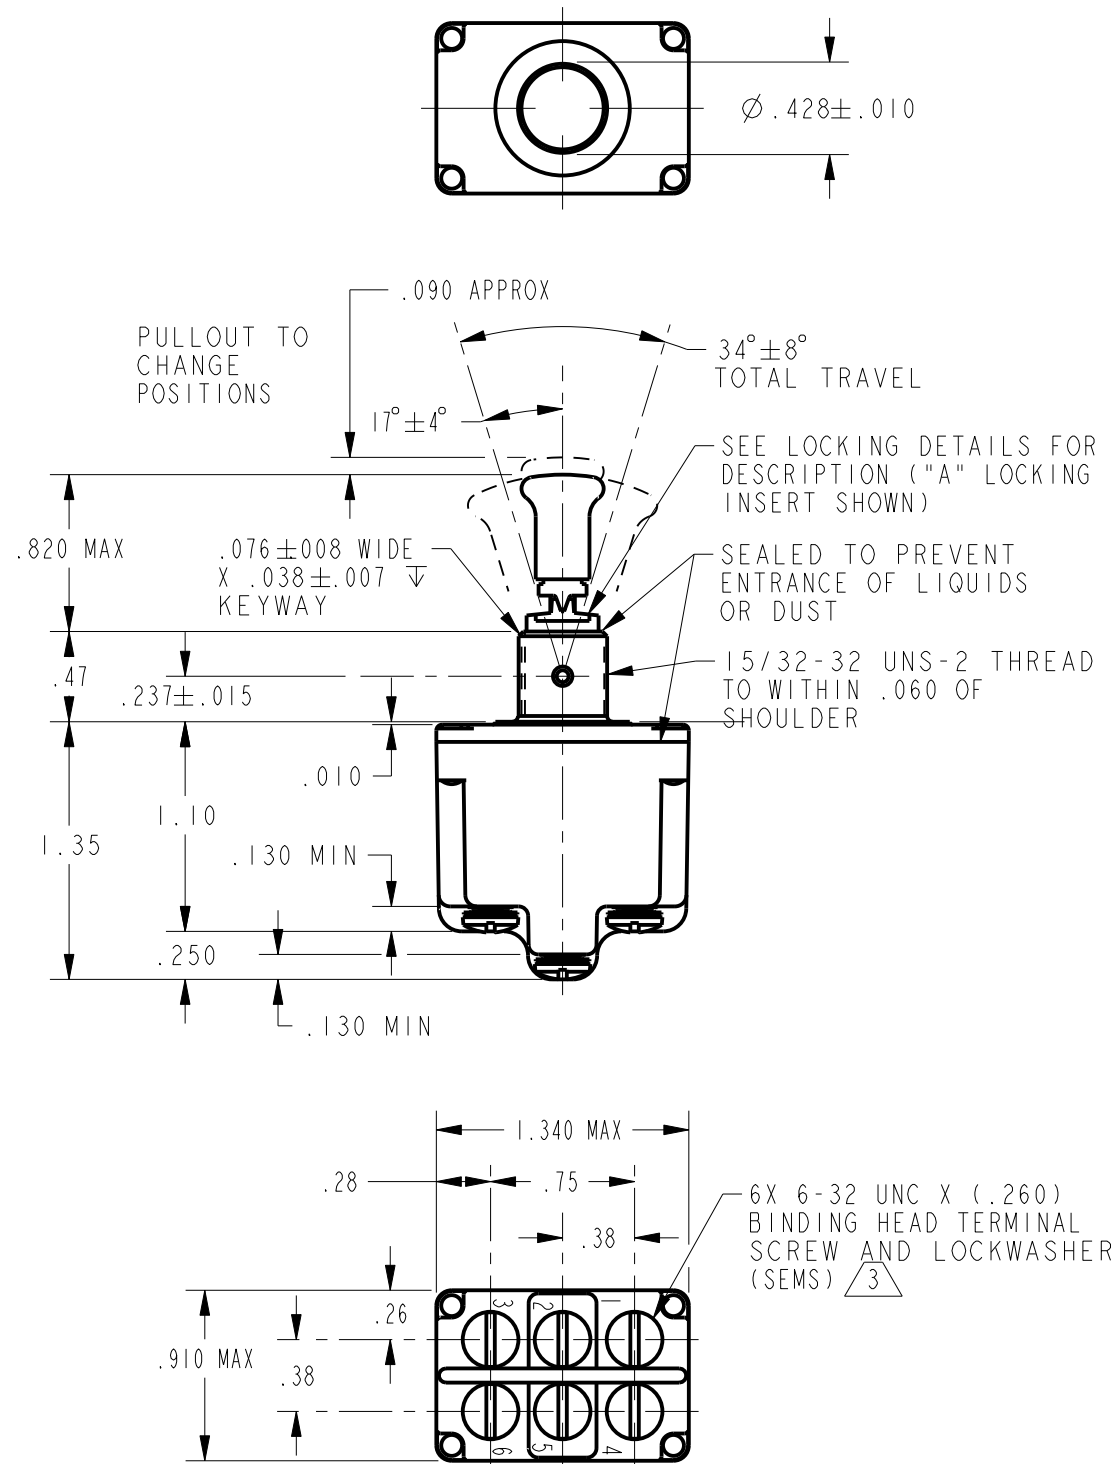

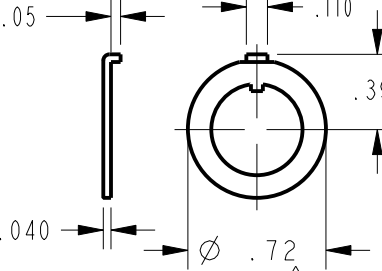


REV	DOCUMENT	CHANGED BY	CHECK
10	0010276	CVS 29DEC04	AK



		CATALOG LISTING 	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN 			CURRENT CAPACITY (AMPS)							
				KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)	RESISTIVE LOAD DC VOLTS		AC VOLTS		LAMP LOAD	IND. LOAD		
2TL222-1A							28	125	250	125	250	28	125	
2TL222-1B														
2TL222-1D		2TL222-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON								
2TL222-1E		2TL222-2	D,F,G	OFF	NONE	ON	20	.75	.5	15	6	7	4	
2TL222-1F		2TL222-3	D,F,G	ON	NONE	ON								
2TL222-1G		2TL222-2I	E,F,K,M	NONE	OFF	ON	(REFER TO LI91 FOR UL RATING)							
2TL222-1H		2TL222-3I	E,F,K,M	NONE	ON	ON								
2TL222-1J		2TL222-4	F	MOM OFF	NONE	ON								
2TL222-1K		2TL222-5	E,F,K,L,M,N	MOM ON	OFF	ON								
2TL222-1L		2TL222-6	F	MOM ON	NONE	OFF	18	.75	.5	11	6	5	2	
2TL222-1M		2TL222-7	E,L,N	MOM ON	OFF	MOM ON								
2TL222-1N		2TL222-8	F	MOM ON	NONE	ON	(REFER TO LI92 FOR UL RATING)							
2TL222-1P		2TL222-5I	E	NONE	ON	MOM ON								
2TL222-2D		2TL222-6I	E	MOM ON	OFF	NONE								
2TL222-2F		"A" 	"B" 	"D" 	"E" 	"F" 	"G" 							
2TL222-2G		LOCKED IN THREE POSITIONS	LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	LOCKED OUT OF CENTER POSITION	LOCKED IN CENTER POSITION	LOCKED IN EXTREME POS. (OPP. KEYWAY)	LOCKED IN EXTREME POS. (KEYWAY SIDE)							
2TL222-3D														
2TL222-3F														
2TL222-3G														
2TL222-2IE		"H" 	"J" 	"K" 	"L" 	"M" 	"N" 							
2TL222-2IF		LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)							
2TL222-2IK														
2TL222-3IM														
2TL222-4F		"P" 												
2TL222-5E		LOCKED OUT OF AND INTO EXTREME POS. (KEYWAY SIDE)												
2TL222-5F														
2TL222-5K														
2TL222-5L														
2TL222-5M														
2TL222-5N														
2TL222-6F														
2TL222-7E	FAA-PMA 													
2TL222-7L														
2TL222-7N														
2TL222-8F														
2TL222-5IE														
2TL222-6IE														

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - FURNISHED UNASSEMBLED
 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
 - KEYWAY SHOWN ON LEFT SIDE
 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - FAA-PMA MUST BE MARKED ON SWITCH
 - FOR MANUFACTURING DETAIL SEE THE CORRESPONDING ASSEMBLY DRAWING FOR EACH LISTING FOR FAA-PMA

DESIGN UNITS: INCH		DRAWN	LJK	29 NOV 99	Honeywell			
TOLERANCES UNLESS NOTED:		CHECK	JAF	29 NOV 99				
NO PLACE	X	±			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			
ONE PLACE	.X	±						
TWO PLACE	.XX	±			TITLE SWITCH, TOGGLE			
THREE PLACE	.XXX	±						
FOUR PLACE	.XXXX	±			SIZE	TYPE	DRAWING NAME	REV
ANGLES	X	±			C	I	2TL222 SERIES CHT2	10
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SCALE	-	WEIGHT .18 LB APPROX	SHEET	I OF I
		Pro/ENGINEER		2D				

LI91 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

LI92 10A 125, 250, 277 VAC
1/4HP 125 VAC
1/2HP 250, 277 VAC
3A 125 VAC "L"

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru