

NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, GOLD PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 26.5 GHz
C. VSWR(RETURN LOSS): 1.11 MAX. (-26 dB MIN.) @ DC-6 GHz
1.22 MAX. (-20 dB MIN.) @ 6-18 GHz
1.33 MAX. (-17 dB MIN.) @ 18-26.5 GHz
CONNECTOR ONLY, PERFORMANCE WILL VARY
BASED ON BOARD LAYOUT
D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C
C. ENGAGEMENT FORCE: 10 LBS (45 N) MAX.
D. DISENGAGEMENT FORCE: 2 LBS (9 N) MIN.



4. PACKAGING:
A. QUANTITY: SEE TABLE
B. MARKING: REEL OR TRAY TO BE MARKED
"AMPHENOL RF, PART NUMBER AND DATE CODE"

PART NUMBER	PACKAGING METHOD	QUANTITY
SMP-MSLD-PCE-5	TRAY	50
SMP-MSLD-PCE-5T	TAPE AND REEL	1000


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	24-Oct-18	09483	EH

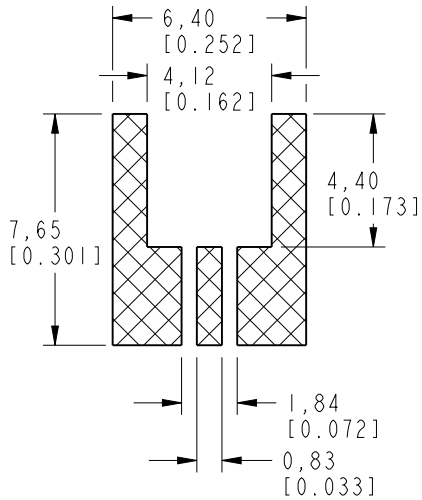

SCALE 5.000

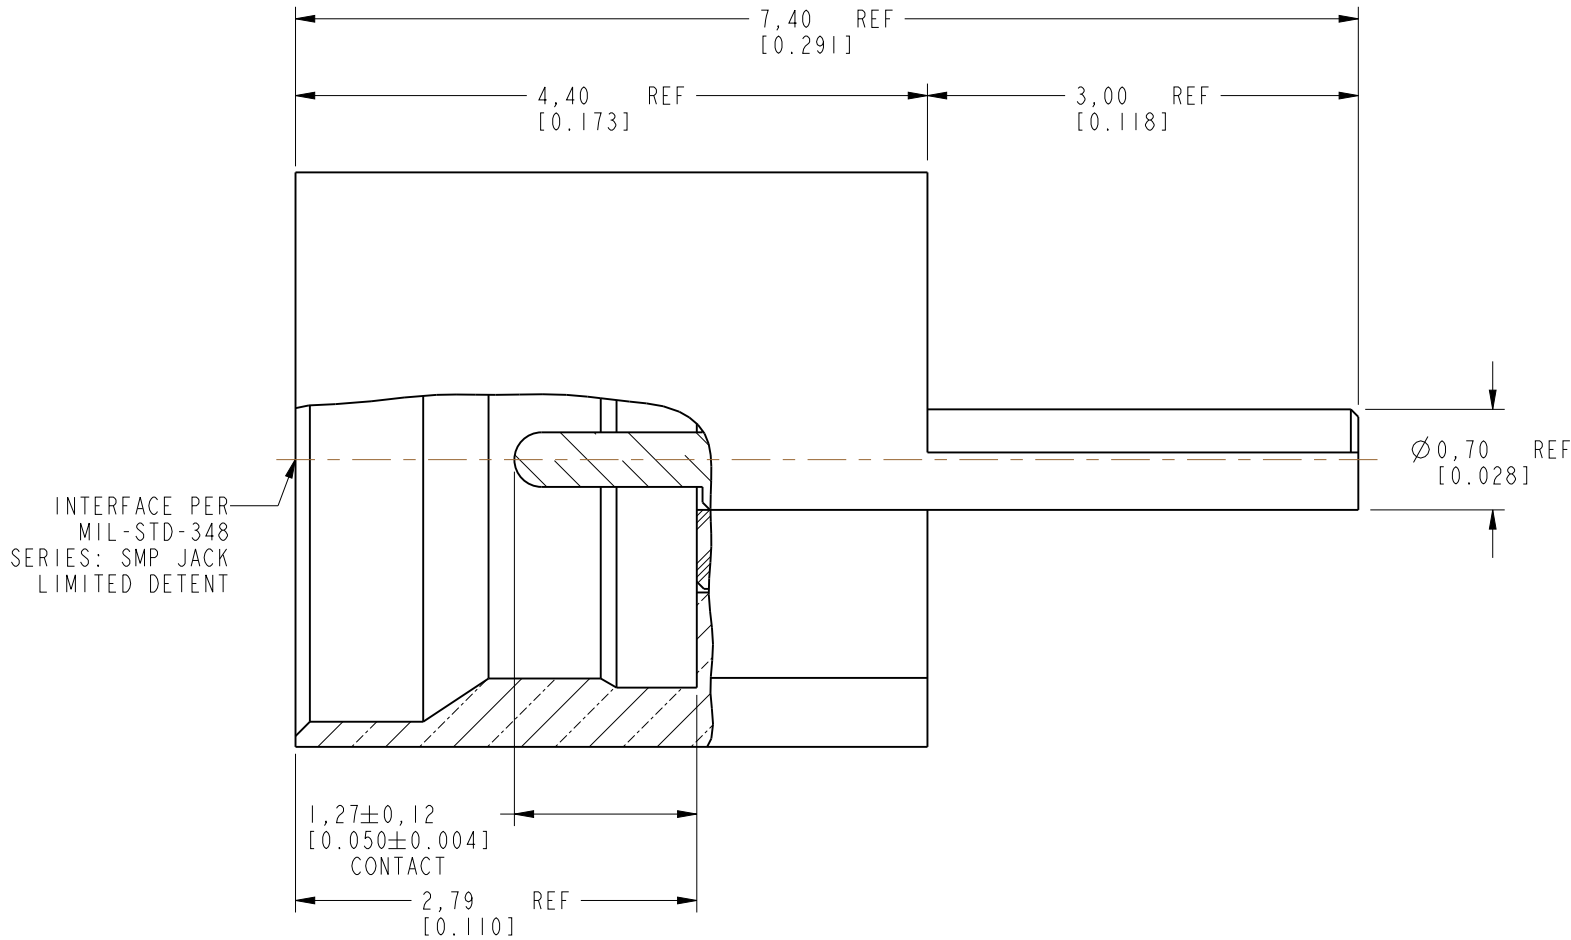

RECOMMENDED
PCB LAYOUT

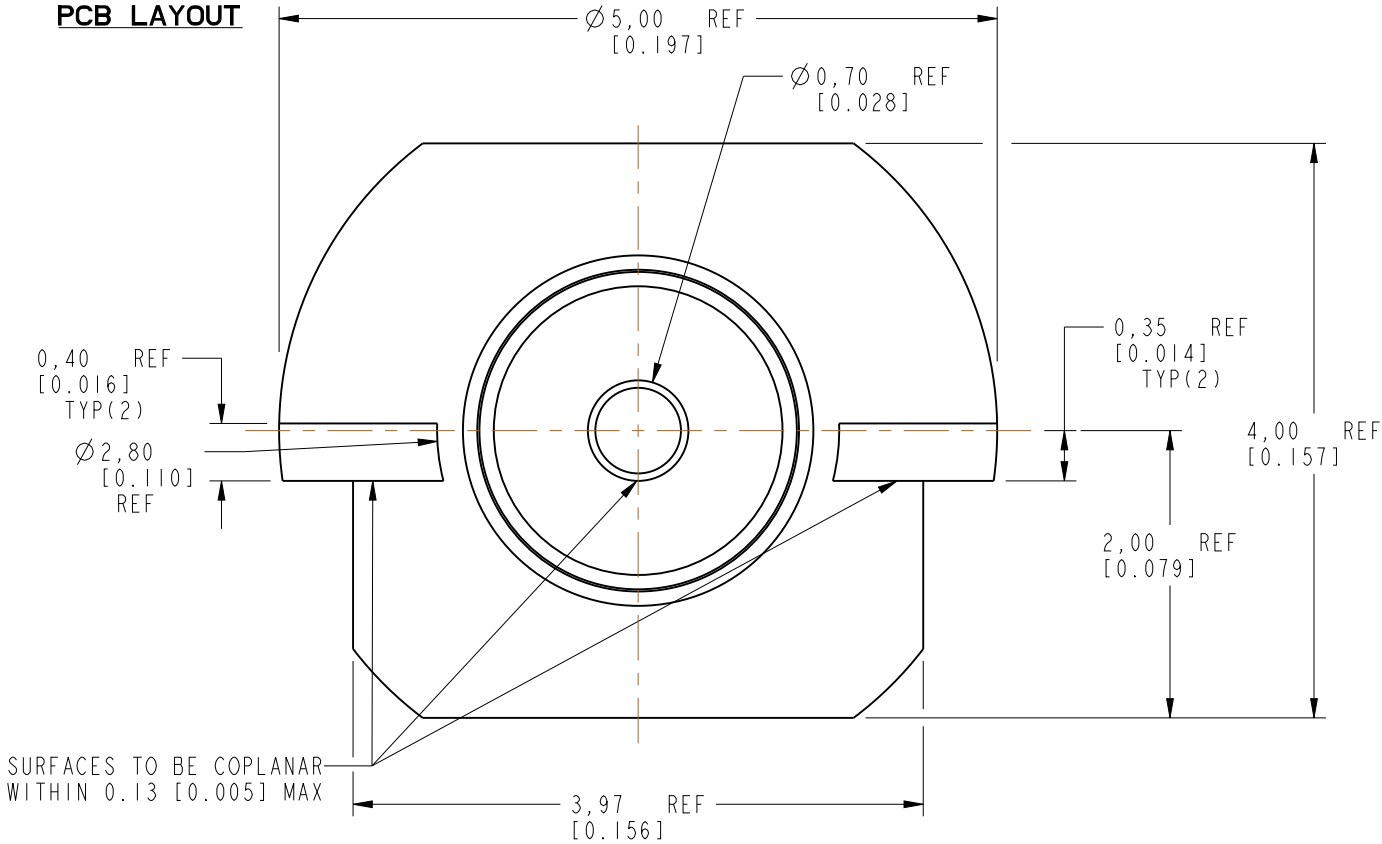

SURFACES TO BE COPLANAR
WITHIN 0.13 [0.005] MAX

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE SMP STR JACK LIMITED DETENT EDGE MOUNT		Amphenol RF www.amphenolrf.com	
	SEE NOTES	ANANDH G	07-Dec-17				
	REFERENCE	ENGINEER	DATE				
	EAR# 8024	ANANDH G	07-Dec-17	SCALE: 19.0:1.0 SHEET 2 OF 2		DRAWING NO. SMP-MSLD-PCE-5X	
	REF: SMP-MSLD-PCE	APPROVED	DATE	DWG SIZE B REV A		ITEM NO. SMP-MSLD-PCE-5X	
CONFIGURATION LEVEL: In Work		CAD FILE				PART NO. SMP-MSLD-PCE-5X	
FINISH							

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru