


## SPECIFICATION CONTROL DRAWING

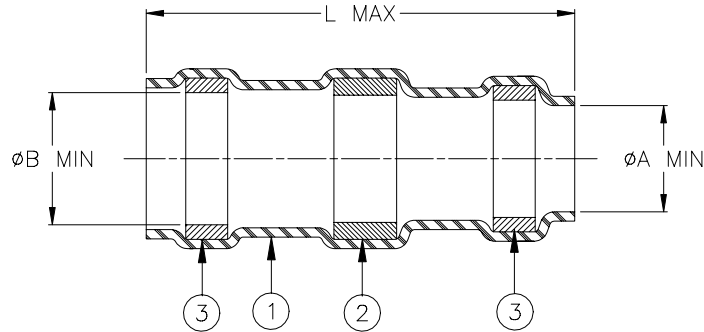

Product Revisions		Product Dimensions			Cable Dimensions					
Product Name		L max	øA min	øB min	C max	D min	E max	F min	G±0.5 (G±0.02)	H±0.5 (H±0.02)
D-100-00-WOTI	D	17.50 (0.689)	2.50 (0.098)	3.00 (0.118)	3.00 (0.118)	1.50 (0.059)	2.50 (0.098)	1.00 (0.394)	7.00 (0.276)	6.00 (0.236)
D-101-00-WOTI	C	17.50 (0.689)	4.30 (0.169)	4.80 (0.189)	4.80 (0.189)	2.10 (0.083)	4.30 (0.169)	1.60 (0.063)	7.00 (0.276)	6.00 (0.236)
D-103-00-WOTI	C	21.00 (0.827)	6.80 (0.268)	7.30 (0.287)	7.30 (0.287)	3.10 (0.122)	6.80 (0.268)	2.60 (0.102)	7.00 (0.276)	6.00 (0.236)


### MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE Sn63 per ANSI J-STD-006.  
FLUX: TYPE ROL1 per ANSI J-STD-004.
- MELTABLE RINGS: Thermally stabilized thermoplastic. Color: gray.

### APPLICATION

- These controlled soldering devices are designed to provide an environment protected shield termination on cables, rated for at least +125°C minimum, meeting the dimensional criteria listed, having tin or silver plated copper shields.
- Temperature range: -65°C to +150°C.
- Install using Raychem-approved convection or infrared heating tools in accordance with Raychem process standard RCPS-100-70.

For best results, prepare the cable as shown.

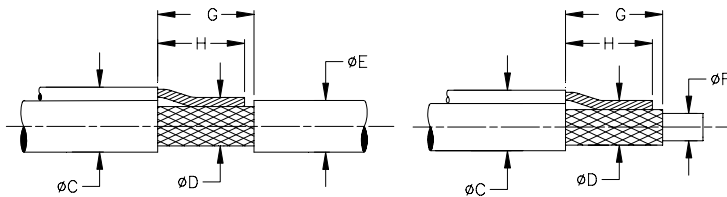

<b>tyco / Electronics / Raychem</b> 307 Constitution Drive, Menlo Park, CA 94025, USA		<b>Wire and Harnessing Products</b>		TITLE: <b>SOLDERSLEEVE DEVICE</b>			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.				DOCUMENT NO.: <b>D-10X-00-WOTI</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D010433		REPLACES: N/A	
DRAWN BY: M. FORONDA	DATE: 7/13/01	PROD. REV. SEE TABLE	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)