

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0432550137

Status:

Active

Overview:

mlx

Description:

6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 6 Circuits, Polyester 94V-0, Tin Plating, White (Translucent), Lead-free

Documents:	
3D Model	Product Specification PSX-42002-0001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	43255
Application	Wire-to-Board
Comments	High Vibration Application
Overview	mlx
Product Name	MLX™

Physical

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-2
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height (in)	1.195 In
Mated Height (mm)	30.35 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	3
Orientation	Vertical
PC Tail Length (in)	0.170 In
PC Tail Length (mm)	4.30 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.57 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.250 In
Pitch - Mating Interface (mm)	6.35 mm
Pitch - Term. Interface (in)	0.250 In
Pitch - Term. Interface (mm)	6.35 mm
Plating min: Mating (µin)	140
Plating min: Mating (µm)	3.5
Polarized to Mating Part	Yes

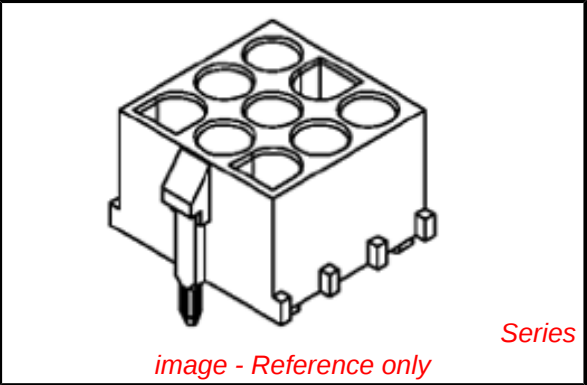

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

43255Series

Mates With

[42021](#) MLX™ Power Crimp Housing Plug.

[42024](#) MLX Crimp Terminal

Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	9A
Voltage - Maximum	600V

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-43255-002
Product Specification	PSX-42002-0001
Sales Drawing	SDA-43255-00**

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION




SEE CHARTS FOR 'A' DIMENSION


(THE 'A' DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

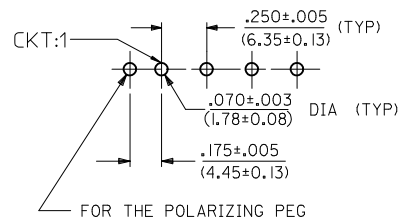

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

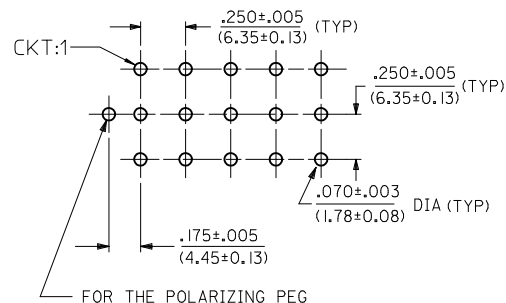

NOTES:

1) MATERIAL CODES:

- 'A' = UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
- 'C' = NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
- 'D' = NYLON, V-2, COLOUR: BLACK (ZYTEL 101F)
- 'E' = PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE

2) PLATING CODES:

- 'A' = TIN 140 m.l.(3.50 MICRONS) TO 240 m.l (6.00 MICRONS)

3) TERMINAL LENGTH CODES:

- I = TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH :

- PLUG HOUSINGS, .084/(2.13) DIA, SERIES: (4202I-**))

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

7) PACKAGING SPECIFICATION:

- 'A' - PK-43255-001, PK-43255-002, PK-43255-003
- 'B' - PK-36518-292

RoHS COMPLIANT

ENTER DESCRIPTION EC NO: 12010-0191 DRWN:HMR01 CHKD:KPRASAD APPR:KPRASAD		QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY SUDHIR	DATE 2004/06/08	TITLE HEADER HOUSING ASSEMBLY .084/(2.13) SERIES COMPLIANT-POLARIZING PEG			
E2		DESCRIPTION REV	4 PLACES ± --- ± ---		CHECKED BY GJLOWE		DATE 2004/06/08		MOLEX MOLEX INCORPORATED	
			3 PLACES ± --- ± 0.005		DATE					
			2 PLACES ± 0.13 ± 0.01		APPROVED BY GJLOWE		DATE 2004/06/08		DOCUMENT NO. SDA-43255-00**	
			1 PLACE ± 0.25 ± ---		MATERIAL NO.		SHEET NO. 1 OF 2			
			ANGULAR ±1/2°		SEE CHART					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
		ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015	PACKAGING (SEE NOTE 7)												
M		43255-0003	2	A	2	A		.17/(14,3)	A												M
		43255-0059		A	1	A			A												
		43255-0113		C	1	A			A												
		43255-0115		C	2	A			A												
		36759-0021		D	1	A			A												
		36759-0061		D	2	A			A												
L		36757-0021	3	E	1	A			A												L
		36757-0061		E	2	A			A												
		43255-0011		A	2	A		.17/(14,3)	A												
		43255-0067		A	1	A			A												
		43255-0121		C	1	A			A												
		43255-0123		C	2	A			A												
K		36759-0022	4	D	1	A			A												K
		36759-0062		D	2	A			A												
		36757-0022		E	1	A			A												
		36757-0062		E	2	A			A												
		43255-0019		A	2	A		.17/(14,3)	A												
		43255-0075		A	1	A			A												
J		43255-0129	6	C	1	A			A												J
		43255-0131		C	2	A			A												
		36759-0023		D	1	A			A												
		36759-0063		D	2	A			A												
		36757-0023		E	1	A			A												
		36757-0063		E	2	A			A												
I		43255-0027	9	A	2	A		.17/(14,3)	A												I
		43255-0083		A	1	A			A												
		43255-0137		C	1	A			A												
		43255-0139		C	2	A			A												
		36759-0024		D	1	A			A												
		36759-0064		D	2	A			A												
H		36757-0024	12	E	1	A			A												H
		36757-0064		E	2	A			A												
		43255-0035		A	2	A		.17/(14,3)	A												
		43255-0091		A	1	A			A												
		43255-0145		C	1	A			A												
		43255-0147		C	2	A			A												
G		36759-0025	15	D	1	A			A												G
		36759-0065		D	2	A			A												
		36757-0025		E	1	A			A												
		36757-0065		E	2	A			A												
		43255-0043		A	2	A		.17/(14,3)	A												
		43255-0099		A	1	A			A												
F		43255-0153	2	C	1	A			A												F
		43255-0155		C	2	A			A												
		36759-0026		D	1	A			A												
		36759-0066		D	2	A			A												
		36757-0026		E	1	A			A												
		36757-0066		E	2	A			A												
E		43255-0051	3	A	2	A		.17/(14,3)	A												E
		43255-0107		A	1	A			A												
		43255-0161		C	1	A			A												
		43255-0163		C	2	A			A												
		36759-0027		D	1	A			A												
		36759-0067		D	2	A			A												
D		36757-0027	4	E	1	A			A												D
		36757-0067		E	2	A			A												
		36766-0001		C	1	A		.17/(14,3)	B												
		36766-0002		C	1	A			B												
		36766-0003		C	1	A			B												
				C	1	A			B												
C																					C
B																					B
A																					A

RoHS COMPLIANT

ENTER DESCRIPTION

2009/12/31

2010/01/05

2010/01/13

DRWN:HM01

CHKD:KPRASAD

APPR:KPRASAD

DESCRIPTION

REV

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± 0.005
2 PLACES	± 0.13	± 0.01
1 PLACE	± 0.25	± .---
ANGULAR ± 1/2°		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

IN/MM

DRAWN BY	DATE
SUDHIR	2004/06/08
CHECKED BY	DATE
GJLOWE	2004/06/08
APPROVED BY	DATE
GJLOWE	2004/06/08

MATERIAL NO.

SEE CHART

SCALE

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

HEADER HOUSING ASSEMBLY

.084/(12.13) SERIES

COMPLIANT-POLARIZING PEG

molex

MOLEX INCORPORATED

DOCUMENT NO.

SDA-43255-00**

SHEET NO.

2 OF 2

SIZE

A1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru