

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.


© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW






DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECR-12-012115	26OCT12	EL	WK



DETAIL B (SCEALE 2:1)

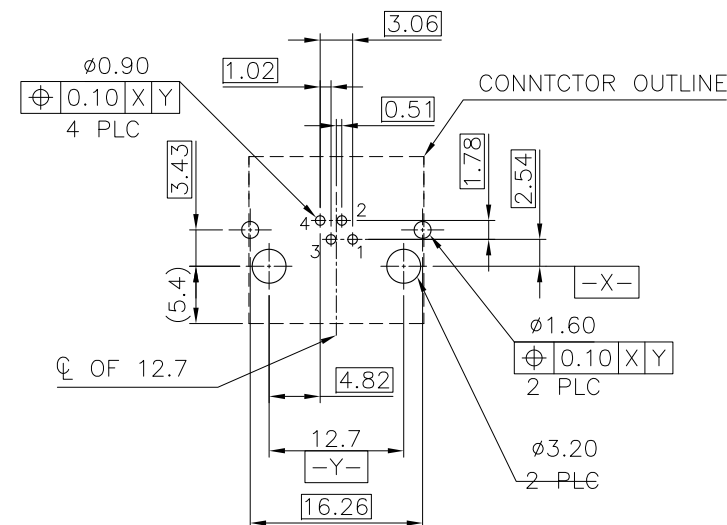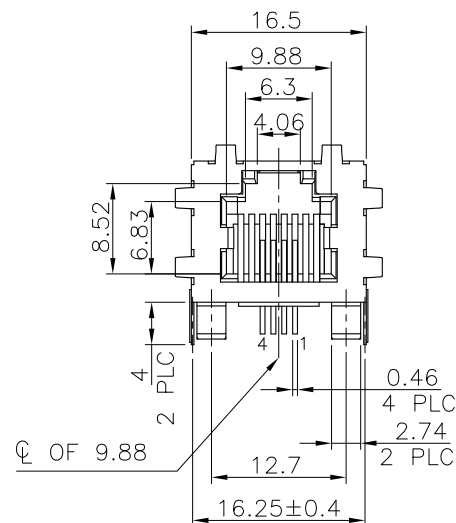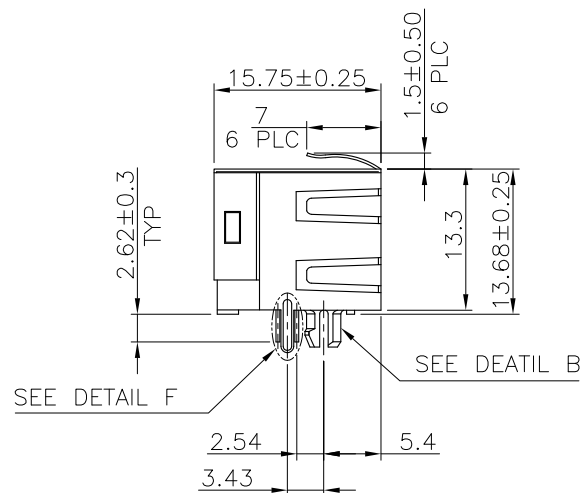RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)

DETAIL F (SCEALE 2:1)

NOTE:

- MATERIAL:
HOUSING: PA46, WITH 30% GF,
UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27μm [50μ"] MIN. NICKEL.
SHELL: 0.508μm [20μ"] MIN. NICKEL PLATED.
- RECOMMENDED PCB THICKNESS: 1.6mm.
- WAVE SOLDER CAPABLE TO 265°C PER TE SPE 109-202, CONDITION B.

OBSOLETE	1.27μm [50μ"]	-2041086-4-
	0.762μm [30μ"]	-2041086-3-
	0.381μm [15μ"]	-2041086-2-
	0.152μm [6μ"]	2041086-1
	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B. HSING 12JAN2009

CHK S. CHIEN 12JAN2009

APVD W. KODAMA 12JAN2009


PRODUCT SPEC

108-57743

APPLICATION SPEC

WEIGHT 5.1 GRAMS

CUSTOMER DRAWING

DIMENSIONS:
MMMATERIAL
SEE NOTETOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH
SEE NOTE

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

SHEET








1 OF 2

REV B

TE

TE Connectivity

MODULAR JACK, RJ11
SINGLE, DIP TYPE

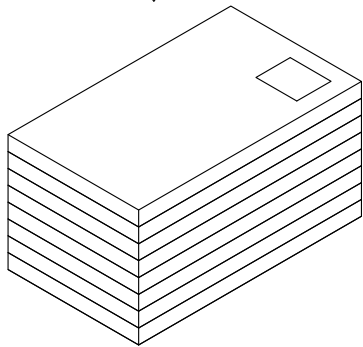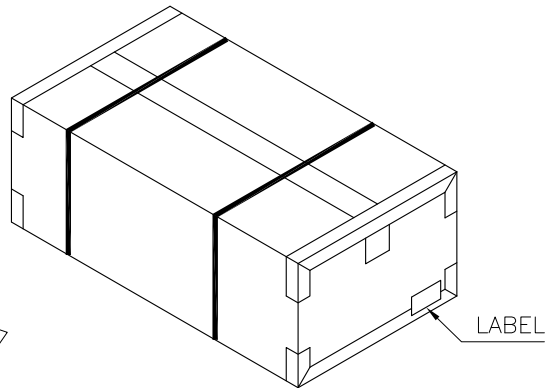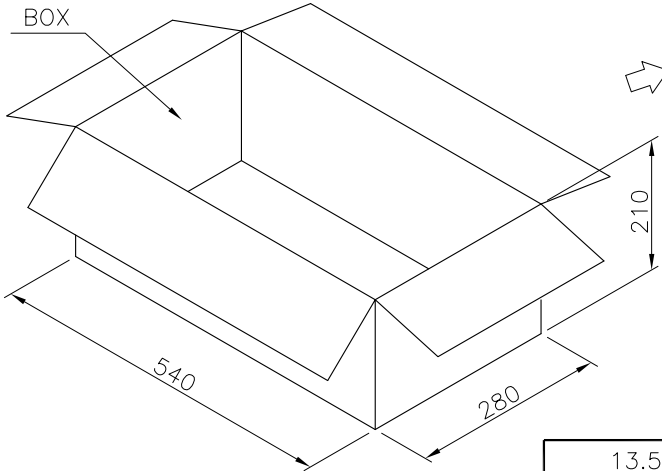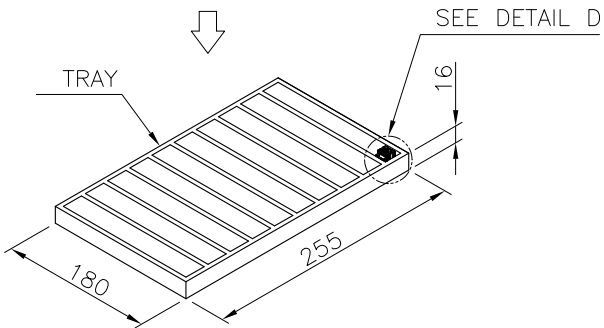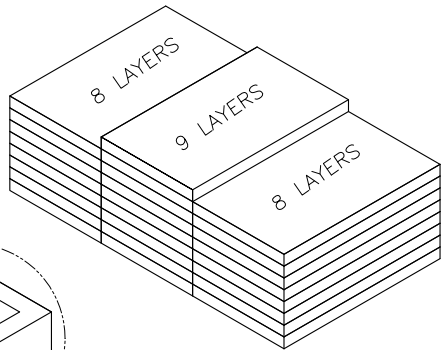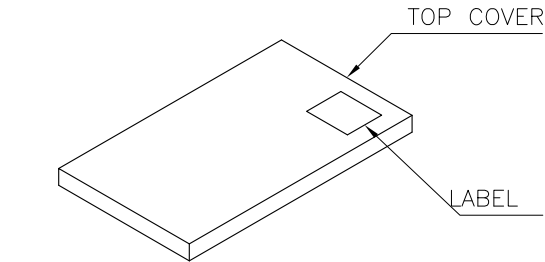

13.5 Kg	11.5 Kg	90	25	2250 PCS
GROSS WEIGHT (Ref.)	NET WEIGHT (Ref.)	PCS/TRAY	TRAYS /BOX	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

MODULAR JACK, RJ11 SINGLE, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

SHEET 2 OF 2

REV B

TE Connectivity

A300779C=2041086

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru