
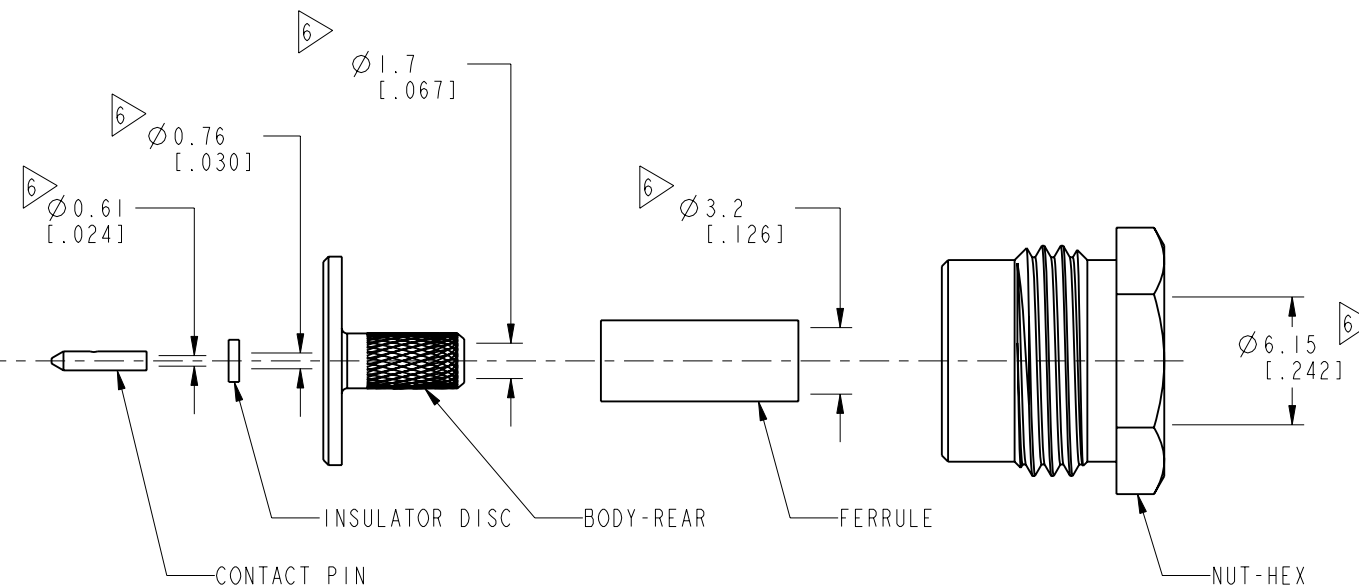

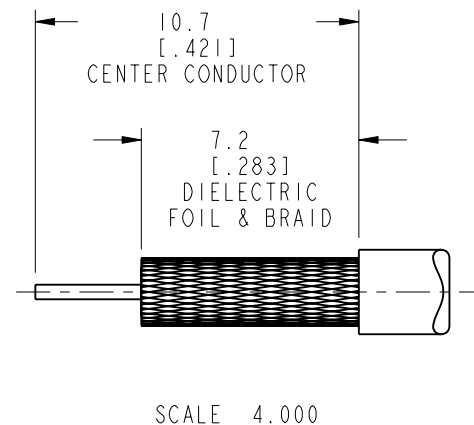


1. MATERIALS AND FINISHES:
BODY,BUSHING BODY,HEX. NUT - BRASS, NICKEL PLATING (0.000100"THICK MIN)
CONTACT - BERYLLIUM COPPER, GOLD PLATING (0.000004"THICK MIN)
CONTACT PIN- BRASS, GOLD PLATING (0.000030" THICK MIN)
FERRULE - BRASS, NICKEL PLATING (0.000100"THICK MIN)
LOCKWASHER - PHOSPHOR BRONZE, SILVER PLATING (0.000200"THICK MIN)
INSULATOR - PTFE, NATURAL
GASKET - SILICONE RUBBER, BLACK
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 2.5 GHz
C. VSWR: 1.15 MAX.
D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
A. CONNECTOR IS IP-67 COMPLIANT.
B. DURABILITY: 500 CYCLES MIN.
C. TEMPERATURE RANGE: -65° C TO 165° C
D. THERE SHALL BE NO EVIDENCE OF AIR BUBBLES WHEN A 17 P.S.I. FORCE IS APPLIED TO MATING END WHILE WHOLE CONNECTOR IS IMMERSSED IN WATER.
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 82-6575, AND DATE CODE"
5. CABLE ASSEMBLY INSTRUCTIONS:
A. TRIM CABLE AS SHOWN.
B. SLIDE FERRULE & NUT-HEX ONTO CABLE
C. CRIMP FERRULE USING .128" HEX. DIE.
D. SLIDE THE INSULATOR DISC OVER THE CABLE CENTER CONDUCTOR.
E. CRIMP OR SOLDER CONTACT PIN TO CABLE CENTER CONDUCTOR.
FLARE CABLE BRAID, INSERT BODY-REAR, BRAID OVER BODY-REAR
INSERT CABLE WITH CONTACT PIN, BODY-REAR INTO BODY
F. APPLY THREAD LOCKING ADHESIVE ON THE THREADS OF THE NUT-HEX.
G. TORQUE NUT-HEX DOWN TO 15 IN LB

6. SHOWS CABLE ENTRY DIMENSIONS.

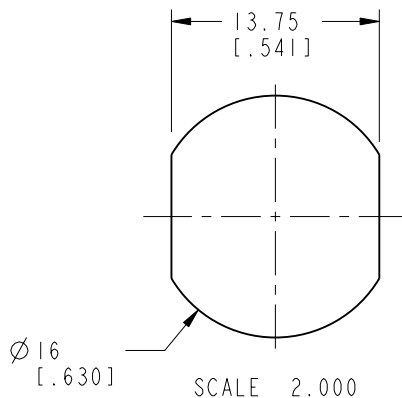

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN J.CHEN	DATE 05-Aug-13	TITLE ASSEMBLY, N, IP-67 JACK, RG-316		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
	-	ENGINEER D.DAVE	DATE 10-Apr-13			DRAWING NO.82-6575	
	REFERENCE EAR #3151 AND 82-6386	APPROVED S.HSIEH	DATE 06-Aug-13	SCALE: 2.8:1.0	SHEET 2 OF 2	ITEM NO.82-6575	
	CONFIGURATION LEVEL: ☐ ☐	CAD FILE	DWG SIZE B		REV A	PART NO.82-6575	
	FINISH						

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru