Specification of Quartz Crystal Controlled Oscillators

1	**NDK Part Number**	NT2016SA-26.000000MHz-NBG2
2	**Chipset Maker**	Please contact us
3	**Application**	GPS on mobile phone
4	**Chipset Name**	Please contact us
5	**NDK Specification Number**	NSA0345C
6	**Type**	NT2016SA
7	**Rating**	
7.1	Nominal Frequency (f_{nom})	26 MHz (2 digits marking)
7.2	Supply Voltage	+1.8 V +/-5 % DC (-Earth)
7.3	Current Consumption	Max. 1.5 mA
7.4	Output Voltage	Min. 0.8 V_{p-p} Clipped sine wave (DC-Coupling)
7.5	Operable Temperature Range	-30 to +85 °C
7.6	Storage Temperature Range	-40 to +85 °C
7.7	Load impedance	10 kΩ // 10 pF
7.8	DC-cut Capacitor	DC-cut capacitor of output is not put in TCXO. Please add DC-cut capacitor (1000 pF) in output line.
8	**Electrical specification**	
8.1	**Frequency Stability**	
8.1.1	Frequency / Temperature characteristics	Max. +/-0.5 ppm / -30 to +85 °C (Based on frequency at +25 +/-2 °C)
8.1.2	Frequency temperature slope	Max. +/-0.1 ppm/°C / -30 to +85°C (Minimum of one measurement every 2 °C)
8.1.3	Frequency / Voltage coefficient	Max. +/-0.1 ppm / +1.8 V +/-5 %
8.1.4	Frequency / Load coefficient	Max. +/-0.2 ppm / (10 kΩ // 10 pF) +/-10%
8.1.5	Frequency tolerance	Max. +/-2.0 ppm (at +25 +/-2 °C, after 2times reflow soldering, based on nominal frequency)
8.1.6	Long-term Frequency Stability	Max. +/-1.0 ppm / year
8.2	Short-term frequency stability	Max. 1.0 ppb (Tau=0.1s)
8.3	Start-up time	Max. 2.0 ms (to 90% of output amplitude)
8.4	Stabilization Time	Max. 2.0 ms (Within +/-0.5ppm of final frequency)
8.5	Harmonic distortion	Max. -5.0 dBc
8.6	Symmetry	40 to 60 %
8.7	Phase Noise	Max. -83 dBc/Hz (at 10 Hz offset) Max. -108 dBc/Hz (at 100 Hz offset) Max. -132 dBc/Hz (at 1k Hz offset) Max. -146 dBc/Hz (at 10k Hz offset) Max. -150 dBc/Hz (at 100k Hz offset)

9 Dimension of external (Unit: mm)

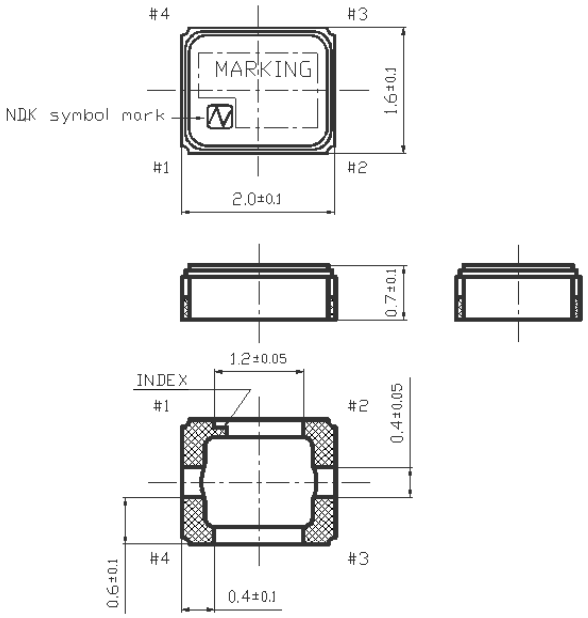

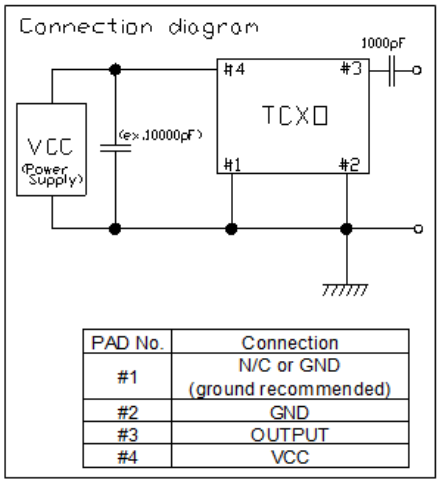

PAD No.	Connection
#1	N/C or GND (ground recommended)
#2	GND
#3	OUTPUT
#4	VCC

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru