

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0855065001

Status:

Active

Overview:

[modular_plugs_jacks](#)

Description:

Modular Jack, Vertical, 8/8, Cat5E, With Ribs

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-85506-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

85506

Component Type

PCB Jack

Magnetic

No

Overview

[modular_plugs_jacks](#)

Performance Category

5e

Power over Ethernet (PoE)

N/A

Product Name

RJ45

Physical

Boot Color

N/A

Color - Resin

Black

Durability (mating cycles max)

500

Flammability

94V-0

Inverted / Top Latch

No

Lightpipes/LEDs

None

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Orientation

Vertical (Top Entry)

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.57 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.050 In

Pitch - Mating Interface (mm)

1.27 mm

Pitch - Term. Interface (in)

0.050 In

Pitch - Term. Interface (mm)

1.27 mm

Plating min: Mating (µin)

50.8

Plating min: Mating (µm)

1.27

Plating min: Termination (µin)

76

Plating min: Termination (µm)

1.9

Ports

1

Positions / Loaded Contacts

8/8

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +80°C

Termination Interface: Style

Through Hole


Waterproof / Dustproof

No

Wire/Cable Type

N/A

Electrical



Series
image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

85506Series

Mates With

90075 FCC 68 Plugs

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V

Solder Process Data

Duration at Max. Process Temperature (seconds)	3
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-95022
Product Specification	PS-85506-001
Sales Drawing	SD-85506-501

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES :

1- MATERIAL:

-HOUSING: LCP FIBER GLASS FILLED UL 94-V0
COLOR BLACK.

-TERMINAL: PHOSPHOR BRONZE.

PLATING :

POST PLATE 0.00127-0.00152/.000050-.000060 GOLD IN
CONTACT AREA , 0.00190/.000075 MIN. PURE TIN
IN TAIL AREA BOTH OVER 0.00127/.000050 MIN NICKEL
OVERALL.

2- JACK FOR MATING WITH F.C.C. 68 PLUGS (90075 MOLEX SERIES).

3- PRODUCT SPECIFICATION PS-85506-001

4- PACKAGING SPECIFICATION PK-95022 (TRAY PACKAGING).

5- EXCEEDS CATEGORY 5E PERFORMANCE.

6- PC BOARD THICKNESS: 1.57/.062


7- MANUFACTURING I.D. CAN BE MG, MXF OR MXI.

8- APPLICATION SPECIFICATION: AS-85513-001


JACK WITH RIBS
MATERIAL NR.: 85506-5001

JACK WITHOUT RIBS
MATERIAL NR.: 85506-5002

P.C.B. MOUNTING PATTERN (see from component side)

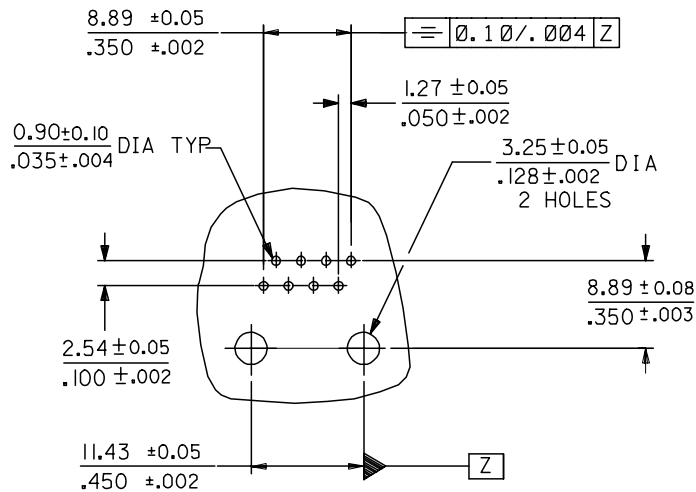

OPTIONAL RIBS

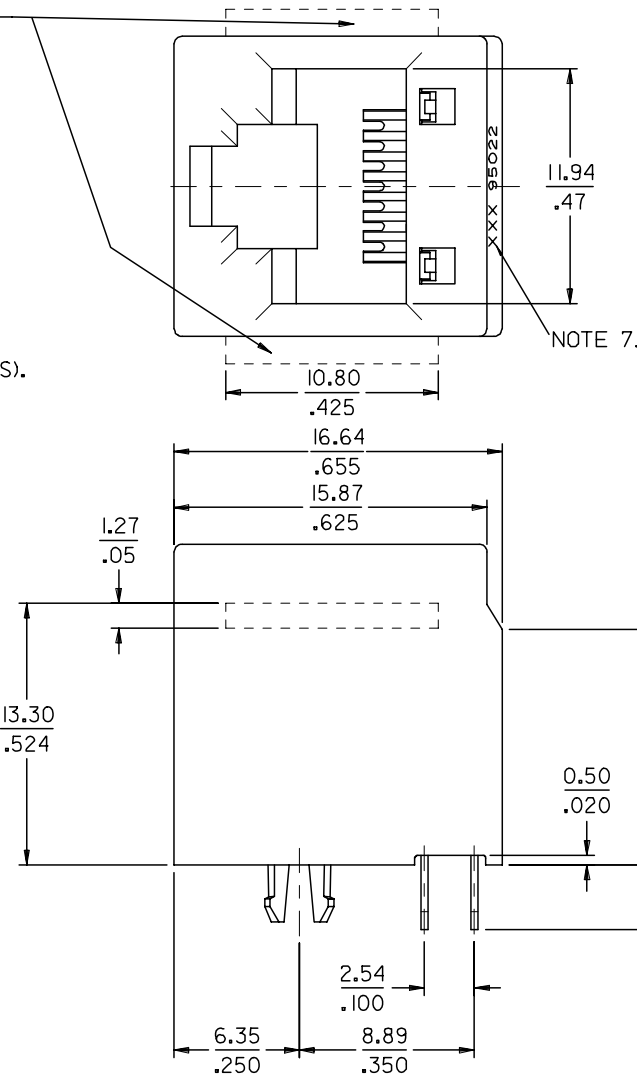

MODIFIED NOTES		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: E2008-0057	2007/08/03	DRWN:DBYRNES	2007/08/03	CHKD:	2007/08/03	APPR:EOMAHONY	2007/08/07	DESCRIPTION	REV	MM	INCH	DRAWN BY	DATE
4 PLACES		± ---	± ---	± ---	± ---	FB	98/02/25	CHECKED BY		DATE		TITLE	
3 PLACES		± ---	± .006	± .015	± .010	MF	1998/02/26	APPROVED BY		DATE		HIGH SPEED MODULAR JACK	
2 PLACES		± 0.15	± .010	± 0.25	± ---	FB	1998/02/28	MATERIAL NO.		DOCUMENT NO.		HIGH PROFILE TOP ENTRY	
1 PLACE		± 0.25	± ---	ANGULAR ± 2 °		SEE CHART		SD-85506-501		SHEET NO.		THROUGH HOLE 8 CIRCUIT	
DRAFT WHERE APPLICABLE		MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 1					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru