




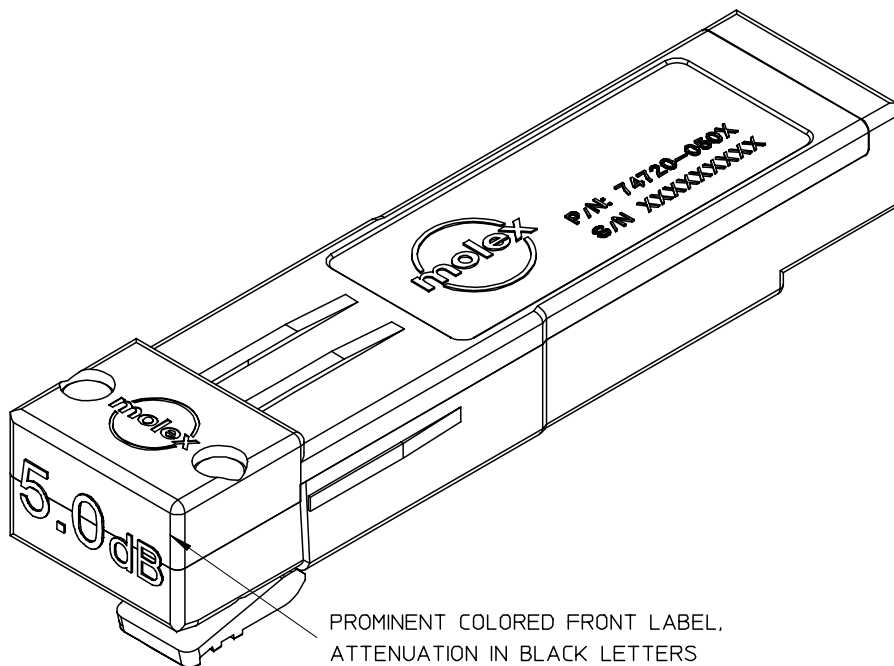


PROMINENT COLORED FRONT LABEL,
ATTENUATION IN BLACK LETTERS

1. Mates to SFP components which comply to standard MSA dimension specifications.
2. Support for:
 - Fibre channel data to 2.125 Gbps
 - Gigabit Ethernet data rates to 2.5 Gbps
 - infiniband data rates to 2.5 Gbps
3. Robust zinc die cast body, bright nickel plated. Mounts belly-to-belly using 0.093"+ boards.
4. Raised wedges assure electrical contact with surrounding EMI cage assembly.
5. Spring loaded latch releases with simple squeeze, and pull action.
6. 100 ohm impedance.
7. Supports serial ID functionality.
8. 3.3V or 5.0V supply.
9. Hot pluggable.

PART NUMBER	LABEL COLOR	PART DESCRIPTION
74720-0503	LIGHT GREEN	SERIAL ID, WITH 5.0 dB ATTENUATION
74720-0502	LIGHT BLUE	SERIAL ID, WITH 0.0 dB ATTENUATION
74720-0501	YELLOW	SERIAL ID, WITH 3.5 dB ATTENUATION


ENTER DESCRIPTION EC NO: USY2006-0271 DRWN: JERWIN CHKD: KKLLOYD APPR: KKLLOYD				DESCRIPTION REV D	QUALITY SYMBOLS ▽=0 □=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
							mm	INCH	DRAWN BY DIRKERS	DATE 2002/05/01	TITLE SFP LOOPBACK ADAPTER					
						4 PLACES	± ---	± ---	CHECKED BY BRUSSELL	DATE 2002/05/01						
						3 PLACES	± ---	± .005	APPROVED BY RUSSELL	DATE 2002/05/01						
						2 PLACES	± 0.13	± ---	ANGULAR ±1/2°		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-74720-0501		SHEET NO. 1 OF 3	
						1 PLACE	± ---	± ---								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

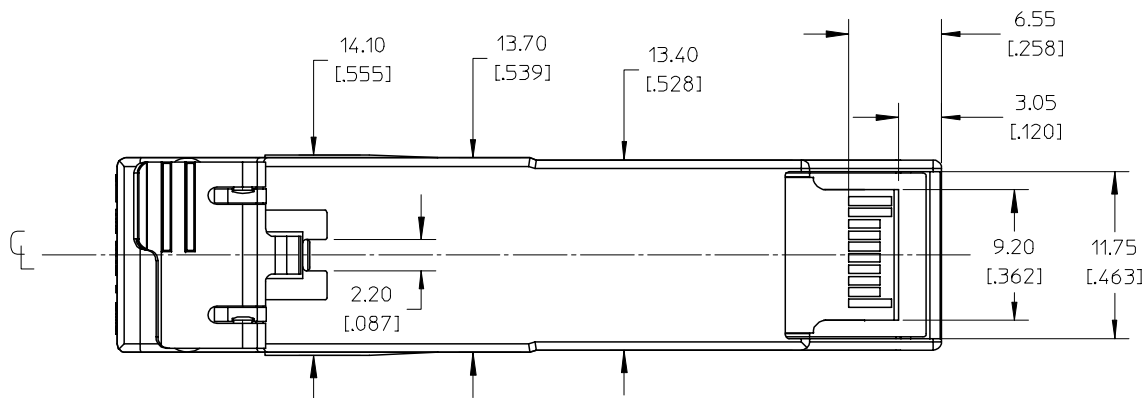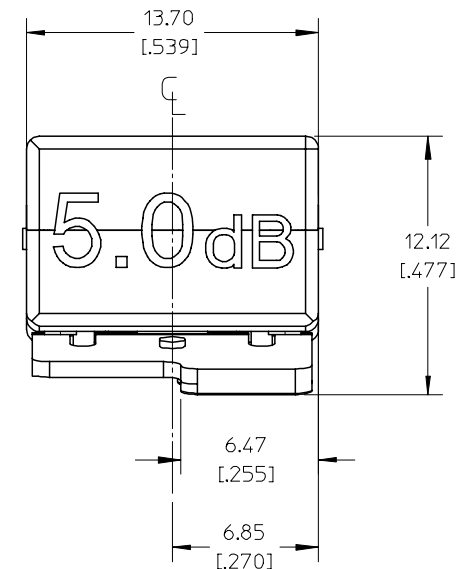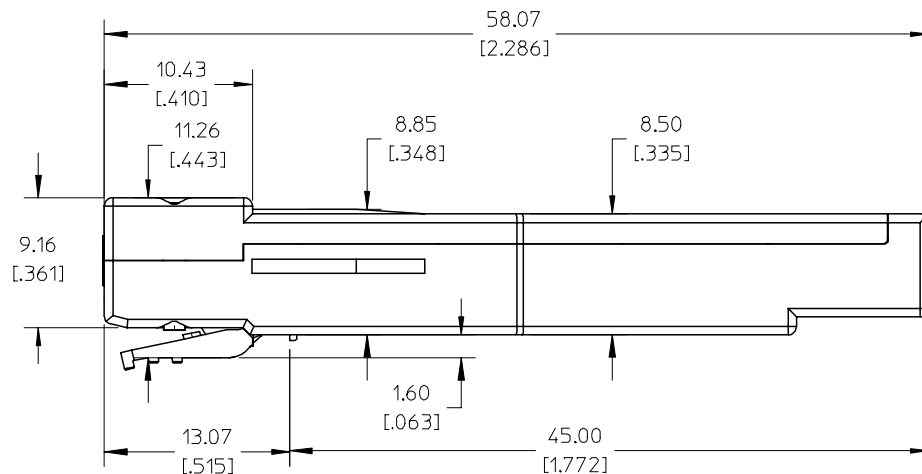


▲ ATTENUATION LEVEL FOR 74720-0502 SHOWN AS EXAMPLE.

ENTER DESCRIPTION EC NO: USY2006-0271 DRWN: JERWIN CHKD: KKLLOYD APPR: KKLLOYD			2006/02/21 2006/03/03 2006/03/09			DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ⌒=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN			SCALE 2:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION				
								mm		INCH		DRAWN BY DIRKERS		DATE 2002/05/01		TITLE SFP LOOPBACK ADAPTER						
			4 PLACES					± ---		± ---		CHECKED BY BRUSSELL		DATE 2002/05/01								
			3 PLACES					± ---		± .005												
			2 PLACES					± 0.13			± ---			APPROVED BY RUSSELL		DATE 2002/05/01		MOLEX MOLEX INCORPORATED				
			1 PLACE					± ---			± ---											
								ANGULAR			±1/2°			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-74720-0501					SHEET NO. 2 OF 3	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														

Top View
Cutaway

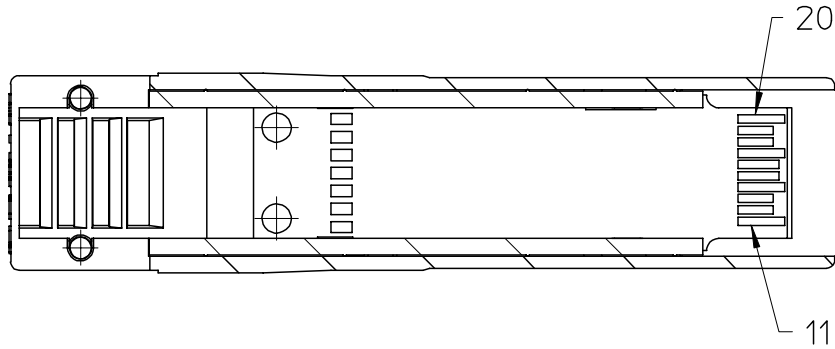

Bottom
View



Gnd T	20	1	Gnd T
TD-	19	2	Tx Fault
TD+	18	3	Tx Disable
Gnd T	17	4	MOD-DEF(2)
VccT	16	5	MOD-DEF(1)
VccR	15	6	MOD-DEF(0)
Gnd R	14	7	Rate Select
RD+	13	8	LOS
RD-	12	9	Gnd R
Gnd R	11	10	Gnd R

ENTER DESCRIPTION EC NO: USY2006-0271 DRWN: JERWIN CHKD: KKLLOYD APPR: KKLLOYD		2006/02/21 2006/03/03 2006/03/09	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
						mm	INCH	DRAWN BY DIRKERS	DATE 2002/05/01	TITLE SFP LOOPBACK ADAPTER		
					4 PLACES	± ---	± ---	CHECKED BY BRUSSELL	DATE 2002/05/01			
					3 PLACES	± ---	± .005	APPROVED BY RUSSELL	DATE 2002/05/01			
					2 PLACES	± 0.13	± ---			MOLEX MOLEX INCORPORATED		
					1 PLACE	± ---	± ---					
					ANGULAR ±1/2°			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-74720-0501		SHEET NO. 3 OF 3
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

6

5

4

3

2


1

D

C

B

A

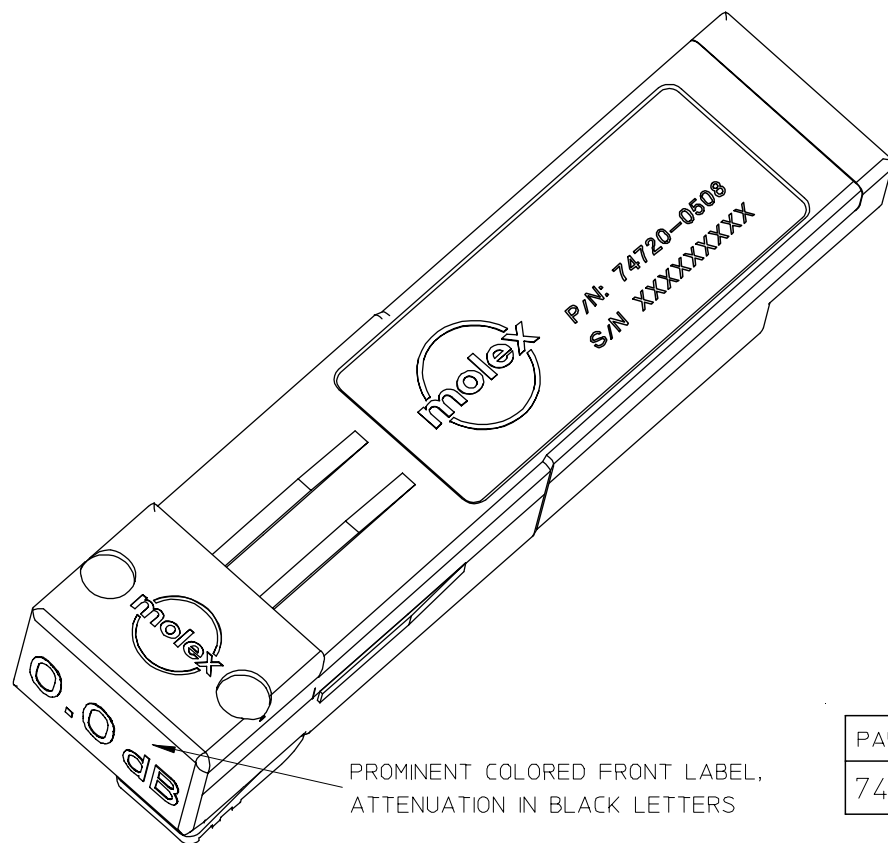

PROMINENT COLORED FRONT LABEL,
ATTENUATION IN BLACK LETTERS

1. Mates to SFP components which comply to standard MSA dimension specifications.
2. Support for:
 - Fibre Channel data rates 2.125 Gbps and 4.25 Gbps
 - Gigabit Ethernet data rates to 2.5 Gbps
 - Infiniband data rates to 2.5 Gbps
3. Robust zinc die cast body, bright nickel plated. Mounts belly-to-belly using 0.093"+ boards.
4. Raised wedges assure electrical contact with surrounding EMI cage assembly.
5. Spring loaded latch releases with simple squeeze, and pull action.
6. 100 ohm impedance.
7. Supports serial ID functionality.
8. 3.3V or 5.0V supply.
9. Hot pluggable.

PART NUMBER	LABEL COLOR	PART DESCRIPTION
74720-0508	LIGHT BLUE	SERIAL ID; 0.0 dB ATTEN.

D

C

B

A

ENTER DESCRIPTION EC NO: USY2006-0057 DRWN:K.PHILLIPS 2005/09/29 CHKD:K.LLOYD 2005/09/29 APPR:K.LLOYD 2005/09/29 A		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 6:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION								
					mm	INCH	DRAWN BY K.PHILLIPS	DATE 2005/09/26	TITLE SFP LOOPBACK ADAPTER									
				4 PLACES	± ---	± ---	CHECKED BY K.LLOYD	DATE 2005/09/26										
				3 PLACES	± ---	± .005	APPROVED BY B.RUSSELL		DATE 2005/09/26		MOLEX INCORPORATED							
				2 PLACES	± 0.13	± ---												
				1 PLACE	± ---	± ---	MATERIAL NO. 747200508					DOCUMENT NO. SD-74720-0508					SHEET NO. 1 OF 3	
				ANGULAR ±1/2°														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														

5

4

3

2

1

6

5

4

3

2




1

D

C

B

A

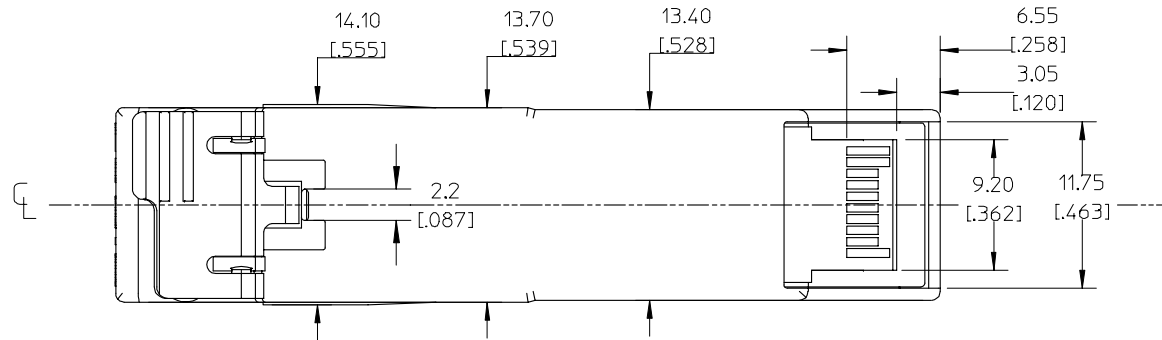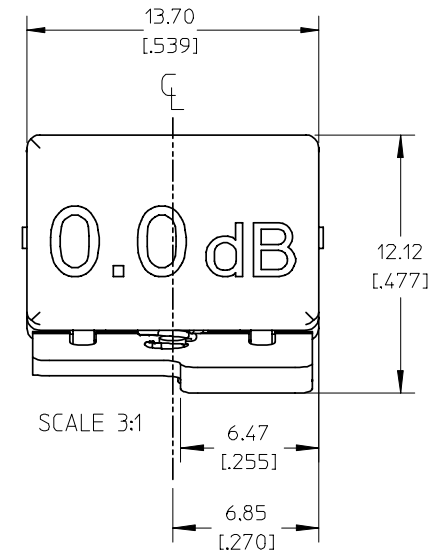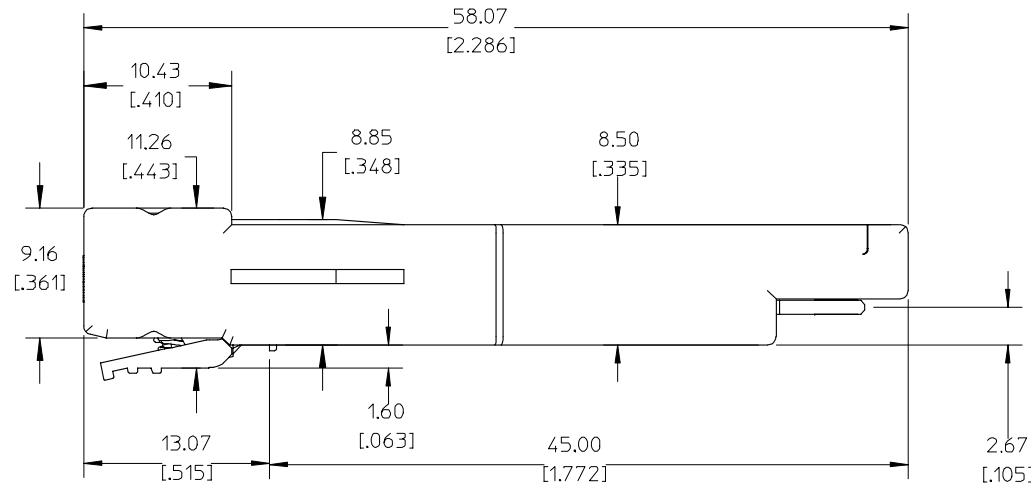

ENTER DESCRIPTION	
EC NO: USY2006-0057	2005/09/29
DRWN:KPHILLIPS	2005/09/29
CHKD:K.LLOYD	2005/09/29
APPR:K.LLOYD	2005/09/29
REV	DESCRIPTION
A	

QUALITY
SYMBOLSGENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± ---
1 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONSDIMENSION STYLE
MM/IN

DRAWN BY	DATE
K.PHILLIPS	2005/09/26
CHECKED BY	DATE
K.LLOYD	2005/09/26
APPROVED BY	DATE
B.RUSSELL	2005/09/26

MATERIAL NO.

747200508

SIZE
ATHIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSIONSCALE
6:1DESIGN UNITS
METRICTHIRD ANGLE
PROJECTIONTITLE
SFP LOOPBACK ADAPTER

MOLEX INCORPORATED

DOCUMENT NO.

SD-74720-0508

SHEET NO.

2 OF 3

5


4

3


2

1

Top View
Cutaway

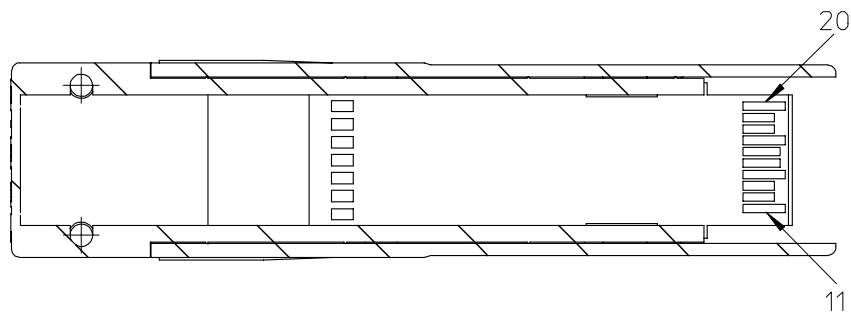

Bottom
View



Gnd T	20	1	Gnd T
TD-	19	2	Tx Fault
TD+	18	3	Tx Disable
Gnd T	17	4	MOD-DEF(2)
VccT	16	5	MOD-DEF(1)
VccR	15	6	MOD-DEF(0)
Gnd R	14	7	Rate Select
RD+	13	8	LOS
RD-	12	9	Gnd R
Gnd R	11	10	Gnd R

ENTER DESCRIPTION EC NO: USY2006-0057 DRWN:KPHILLIPS 2005/09/29 CHKD:K.LLOYD 2005/09/29 APPR:K.LLOYD 2005/09/29 A			DESCRIPTION REV			QUALITY SYMBOLS ▽=0 ▽C=0			GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE			SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION			
												MM/IN			2:1		METRIC					
															DRAWN BY		DATE		TITLE			
									4 PLACES			± --- ± ---			K.PHILLIPS		2005/09/26		SFP LOOPBACK ADAPTER			
									3 PLACES			± --- ± .005			CHECKED BY		DATE					
									2 PLACES			± 0.13 ± ---			K.LLOYD		2005/09/26					
1 PLACE			± --- ± ---			APPROVED BY		DATE		MOLEX MOLEX INCORPORATED												
			ANGULAR ±1/2°			B.RUSSELL		2005/09/26														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						MATERIAL NO.			DOCUMENT NO.			SHEET NO.										
						747200508			SD-74720-0508			3 OF 3										
			SIZE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru