

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0751179018

Status:

Active

Overview:

vhdm

Description:

2.00mm (.079") Pitch VHDM® Board-to-Board Stacker Receptacle, Vertical, 8-Row, 400 Circuits, 0.76µm (30µ") Gold (Au)

Documents:

- Drawing (PDF)

Product Specification PS-74031-999 (PDF)
- Packaging Specification (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family	Backplane Connectors
Series	75117
Application	Daughtercard
Application Tooling Documents	Tooling Manual
Comments	Stack Height 18mm (.708"), Lead Free
Component Type	PCB Receptacle
Overview	vhdm
Product Name	VHDM®
Style	N/A

Physical

Circuits (Loaded)	400
Circuits (maximum)	400
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Copper-Nickel-Silicon, High Performance Alloy (HPA)
Material - Resin	High Temperature Thermoplastic
Number of Columns	N/A
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length (in)	0.112 In
PC Tail Length (mm)	2.85 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.071 In
PCB Thickness Recommended (mm)	1.80 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	3.125 Gbps

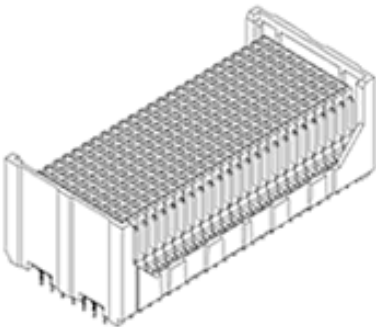


image - Reference only

Series

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
75117Series

Mates With
74060 VHDM® Board-to-Board Backplane Header

Real Signals (per 25mm)	100
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Material Info


Reference - Drawing Numbers

Product Specification	PS-74031-999
Sales Drawing	SD-75117-001

VHDM and Very High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/28/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

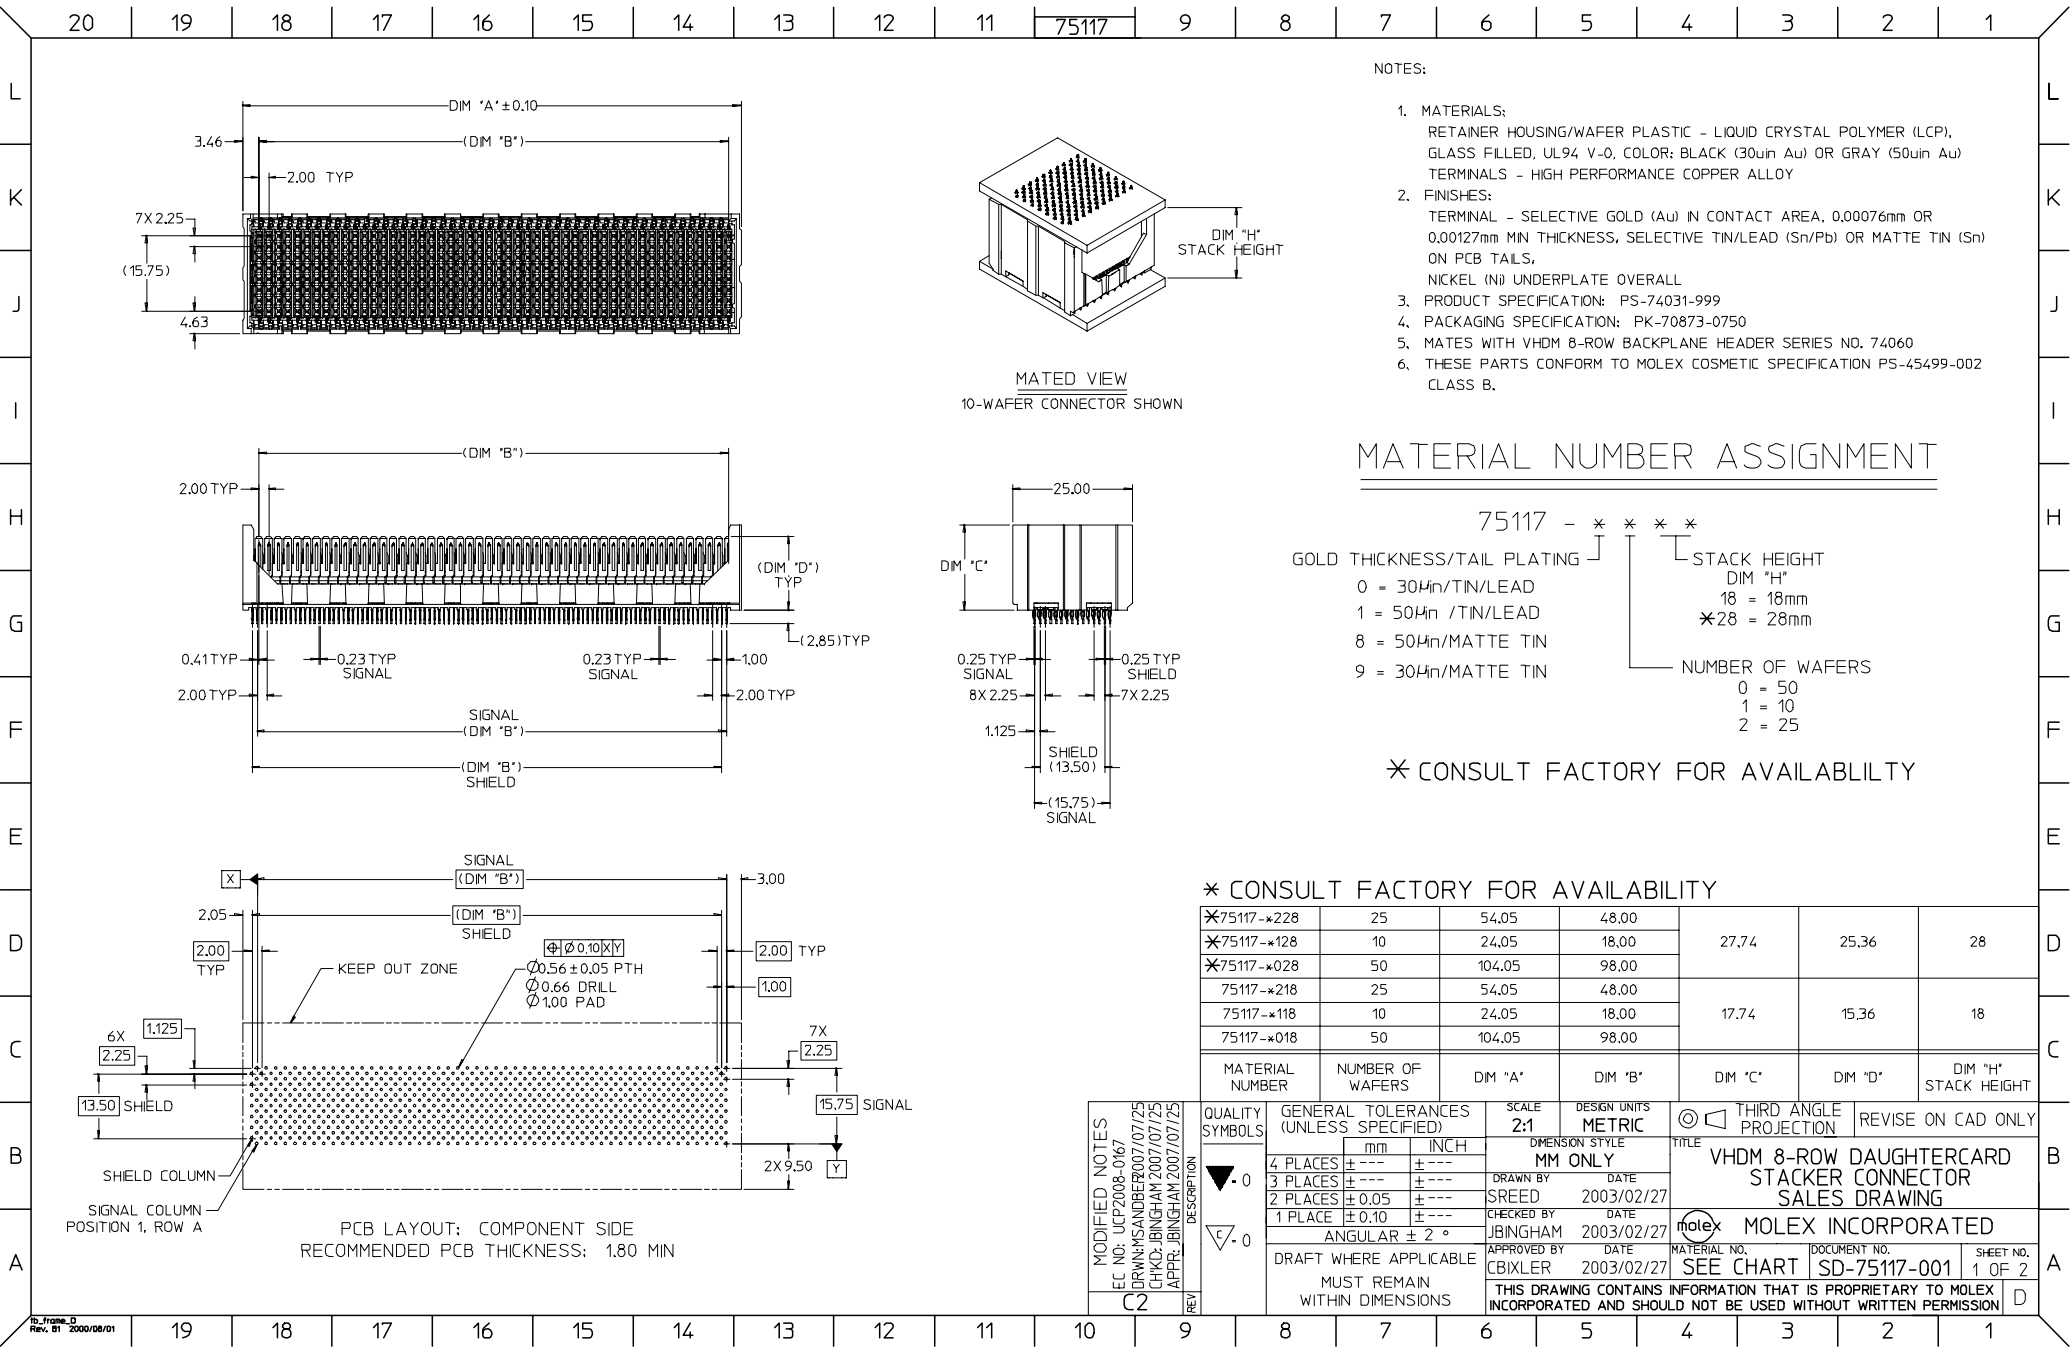

NOTES:

1. MATERIALS:
RETAINER HOUSING/WAFER PLASTIC - LIQUID CRYSTAL POLYMER (LCP),
GLASS FILLED, UL94 V-0, COLOR: BLACK (30µin Au) OR GRAY (50µin Au)
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
2. FINISHES:
TERMINAL - SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm OR
0.00127mm MIN THICKNESS, SELECTIVE TIN/LEAD (Sn/Pb) OR MATTE TIN (Sn)
ON PCB TAILS,
NICKEL (Ni) UNDERPLATE OVERALL
3. PRODUCT SPECIFICATION: PS-74031-999
4. PACKAGING SPECIFICATION: PK-70873-0750
5. MATES WITH VHDM 8-ROW BACKPLANE HEADER SERIES NO. 74060
6. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002
CLASS B.

MATERIAL NUMBER ASSIGNMENT

75117 - * * * *

GOLD THICKNESS/TAIL PLATING

0 = 30µin/TIN/LEAD
1 = 50µin /TIN/LEAD
8 = 50µin/MATTE TIN
9 = 30µin/MATTE TIN

STACK HEIGHT
DIM "H"
18 = 18mm
*28 = 28mm

NUMBER OF WAFERS
0 = 50
1 = 10
2 = 25

* CONSULT FACTORY FOR AVAILABILITY

* CONSULT FACTORY FOR AVAILABILITY

*75117-*228	25	54.05	48.00	27.74	25.36	28
*75117-*128	10	24.05	18.00			
*75117-*028	50	104.05	98.00			
75117-*218	25	54.05	48.00	17.74	15.36	18
75117-*118	10	24.05	18.00			
75117-*018	50	104.05	98.00			
MATERIAL NUMBER	NUMBER OF WAFERS	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "H" STACK HEIGHT

MODIFIED NOTES EC NO: UCP-008-067 DRAWN: MSANDBERG 07/07/25 CHKD: JBINGHAM 07/07/25 APPR: JBINGHAM 07/07/25 REV C2	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	4 PLACES	± 0.10	mm	DRAWN BY DATE	TITLE VHDM 8-ROW DAUGHTERCARD STACKER CONNECTOR SALES DRAWING MOLEX MOLEX INCORPORATED	MATERIAL NO. DOCUMENT NO. SHEET NO. SEE CHART SD-75117-001 1 OF 2
	3 PLACES	± 0.05	mm	CHECKED BY DATE		
	2 PLACES	± 0.05	mm	APPROVED BY DATE		
	1 PLACE	± 0.10	mm	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		



SEE SHEET 1 EC NO.: UCP-2008-0767 DRAWN BY: MSANDRE#2007/07/25 CHKD BY: JINGHAN 2007/07/25 APPR. BY: JINGHAN 2007/07/25	QUALITY SYMBOLS ▼ - 0 ▽ - 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
				DIMENSION STYLE MM ONLY		TITLE	VHDM 8-ROW DAUGHTERCARD STACKER CONNECTOR SALES DRAWING	
			mm	INCH	DRAWN BY SREED	DATE 2003/02/27		
			4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	CHECKED BY JBINGHAM	DATE 2003/02/27		
			2 PLACES ± 0.05 ± ---	1 PLACE ± 0.10 ± ---	APPROVED BY CBXLER	DATE 2003/02/27		
			ANGULAR ± 2 °		MATERIAL NO. SEE CHART	DOCUMENT NO. SD-75117-001	SHEET NO. 2 OF 2	
DESCRIPTION	MOLEX INCORPORATED							
REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
DRAFT WHERE APPLICABLE								
MUST REMAIN WITHIN DIMENSIONS								

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru