



## Features

- Two channel quadrature output
- Bushing or servo mount
- Square wave signal
- Small size
- Resolution to 256 PPR
- CMOS and TTL compatible
- Long life
- Ball bearing option for high operating speed up to 3000 rpm
- RoHS compliant\*

## EN - Rotary Optical Encoder

### Electrical Characteristics

|  |  |
|--|--|
| Output   | 2-bit quadrature code, Channel A leads Channel B by 90° (electrical) with clockwise rotation |
| Resolution   | 25 to 256 cycles per revolution  |
| Insulation Resistance (500 VDC)                    | 1,000 megohms  |
| Electrical Travel                                  | Continuous   |
| Supply Voltage                                     | 5.0 VDC ±0.25 VDC  |
| Supply Current                                     | 26 mA maximum  |
| Output Voltage                                     |  |
| Low Output   | 0.8 V maximum  |
| High Output  | 4 V minimum  |
| Output Current                                     |  |
| Low Output   | 25 mA minimum  |
| Rise/Fall Time                                     | 200 ns (typical)   |
| Shaft RPM (Ball Bearing)                           | 3,000 rpm maximum  |
| Power Consumption                                  | 136 mW maximum   |
| Pulse Width (Electrical Degrees, Each Channel)     | 180° ±45° typ.   |
| Pulse Width (Index Channel)                        | 360° ±90°  |
| Phase (Electrical Degrees, Channel A to Channel B) | 90° ±45° typ.  |

### Environmental Characteristics


|   |                                       |
|---|---------------------------------------|
| Operating Temperature Range             | -40 °C to +75 °C (-40 °F to +167 °F)  |
| Storage Temperature Range               | -40 °C to +85 °C (-40 °F to +185 °F)  |
| Humidity                                | MIL-STD-202, Method 103B, Condition B |
| Vibration                               | 5 G                                   |
| Shock                                   | 50 G                                  |
| Rotational Life                         |                                       |
| A & C Bushings (300 rpm maximum)**      | 10,000,000 revolutions                |
| W, S & T Bushings (3,000 rpm maximum)** | 200,000,000 revolutions               |
| IP Rating                               | IP 40                                 |

### Mechanical Characteristics

|   |  |
|---|--|
| Mechanical Angle                                | 360° Continuous  |
| Torque (Starting and Running)                   |  |
| A & C Bushings (Spring Loaded for Optimum Feel) | 1 N-cm (1.5 oz-in.) maximum  |
| W, S & T Bushings (Ball Bearing Shaft Support)  | 0.07 N-cm (0.1 oz-in.) maximum   |
| Mounting Torque                                 | 1.7 to 2.0 N-cm (15 to 18 lb.-in.) maximum   |
| Shaft End Play                                  | 0.30 mm (0.012") T.I.R. maximum  |
| Shaft Radial Play                               | 0.12 mm (0.005") T.I.R. maximum  |
| Weight  | 11 gms. (0.4 oz.)  |
| Terminals                                       | Axial or radial pc pins or ribbon cable  |
| Soldering Condition                             |  |
| Manual Soldering                                | 96.5Sn/3.0Ag/0.5Cu solid wire or no-clean rosin cored wire<br>370 °C (700 °F) max. for 3 seconds |
| Wave Soldering                                  | 96.5Sn/3.0Ag/0.5Cu solder with no-clean flux<br>260 °C (500 °F) max. for 5 seconds               |
| Wash processes                                  | Not recommended  |
| Marking   | Manufacturer's trademark, name, part number, and date code.                                      |
| Hardware  | One lockwasher and one mounting nut supplied with each encoder, except on servo mount versions.  |

\*\*For resolutions ≤ 128 quadrature cycles per shaft revolution.

### Quadrature Output Table

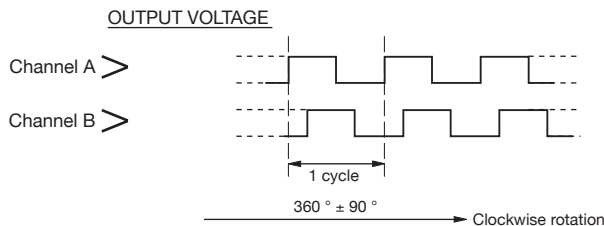

#### STANDARD RESOLUTIONS AVAILABLE

|  |     |
|--|-----|
| (Full quadrature output cycles per shaft revolution) |     |
| 25*  | 125 |
| 50*  | 128 |
| 64   | 200 |
| 100  | 256 |

For Non-Standard Resolutions—Consult Factory

\* Channel B leads Channel A

# EN - Rotary Optical Encoder

## Dimensional Drawings





Consult factory for options not shown, including:

- Wire lead or cable options
- Connectors
- Non-standard resolutions
- Special shaft/bushing sizes and features
- Special performance characteristics
- PCB mounting bracket


**Bushing Style C**





## TERMINATION DIAGRAM

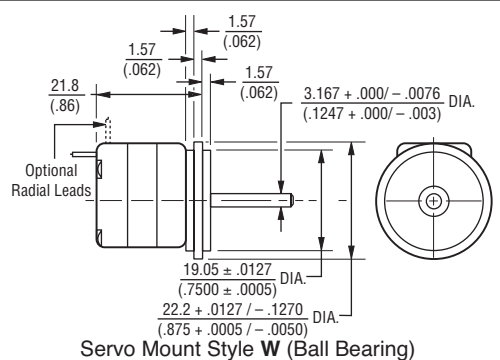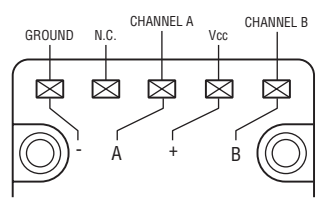

**Servo Mount Style W (Ball Bearing)**

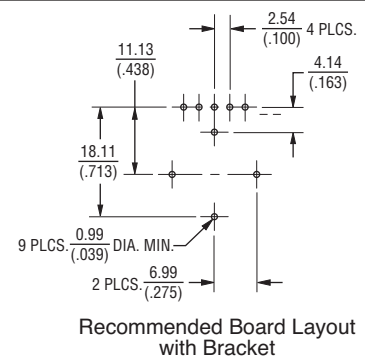

**Recommended Board Layout with Bracket**

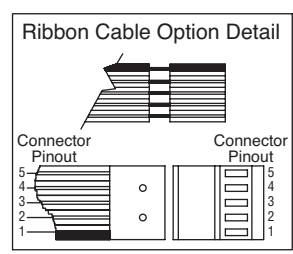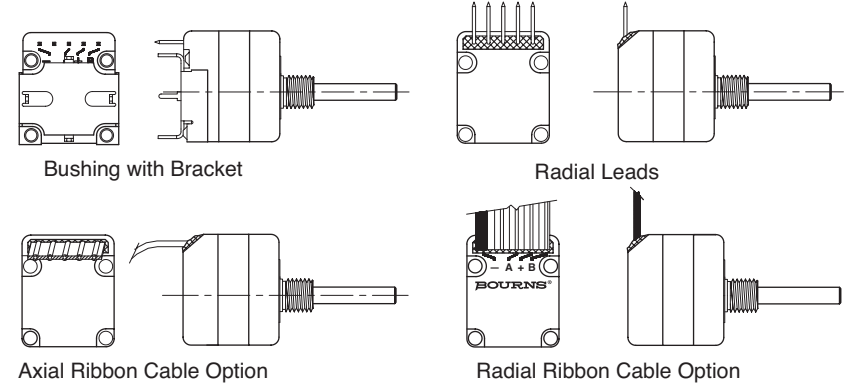

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.

**GENERAL INFORMATION**

The Bourns® EN model is a self-contained rotary optical encoder. It produces a 2-bit quadrature signal which is suitable for digital systems where both magnitude and direction of adjustment must be provided. The EN encoder is ideal for use as a digital panel control or as a position sensing device in applications where long life, reliability, high resolution and precise linearity are critical.

The EN series encoder converts rotary input into electrical signals which can be used by microprocessors without A/D conversion.

Bourns encoder output signals are square wave digital pulses which do not require debounce circuitry. Both features make it possible to significantly reduce the memory overhead, wiring and wiring interconnects required by other types of control devices.

EN optical encoders offer a useful rotational life of from 10 million to 200 million shaft revolutions, making them ideal for extended service applications. The Bourns encoder is also compact and well suited for situations where the available space is limited.

# EN - Rotary Optical Encoder BOURNS®

## How To Order



\* Shaft length measured from mounting surface.  
 \*\* 25 and 50 PPR is reversed (Channel B leads Channel A).  
 \*\*\* Standard ribbon cable is 10" long. Consult factory for other lengths.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)