


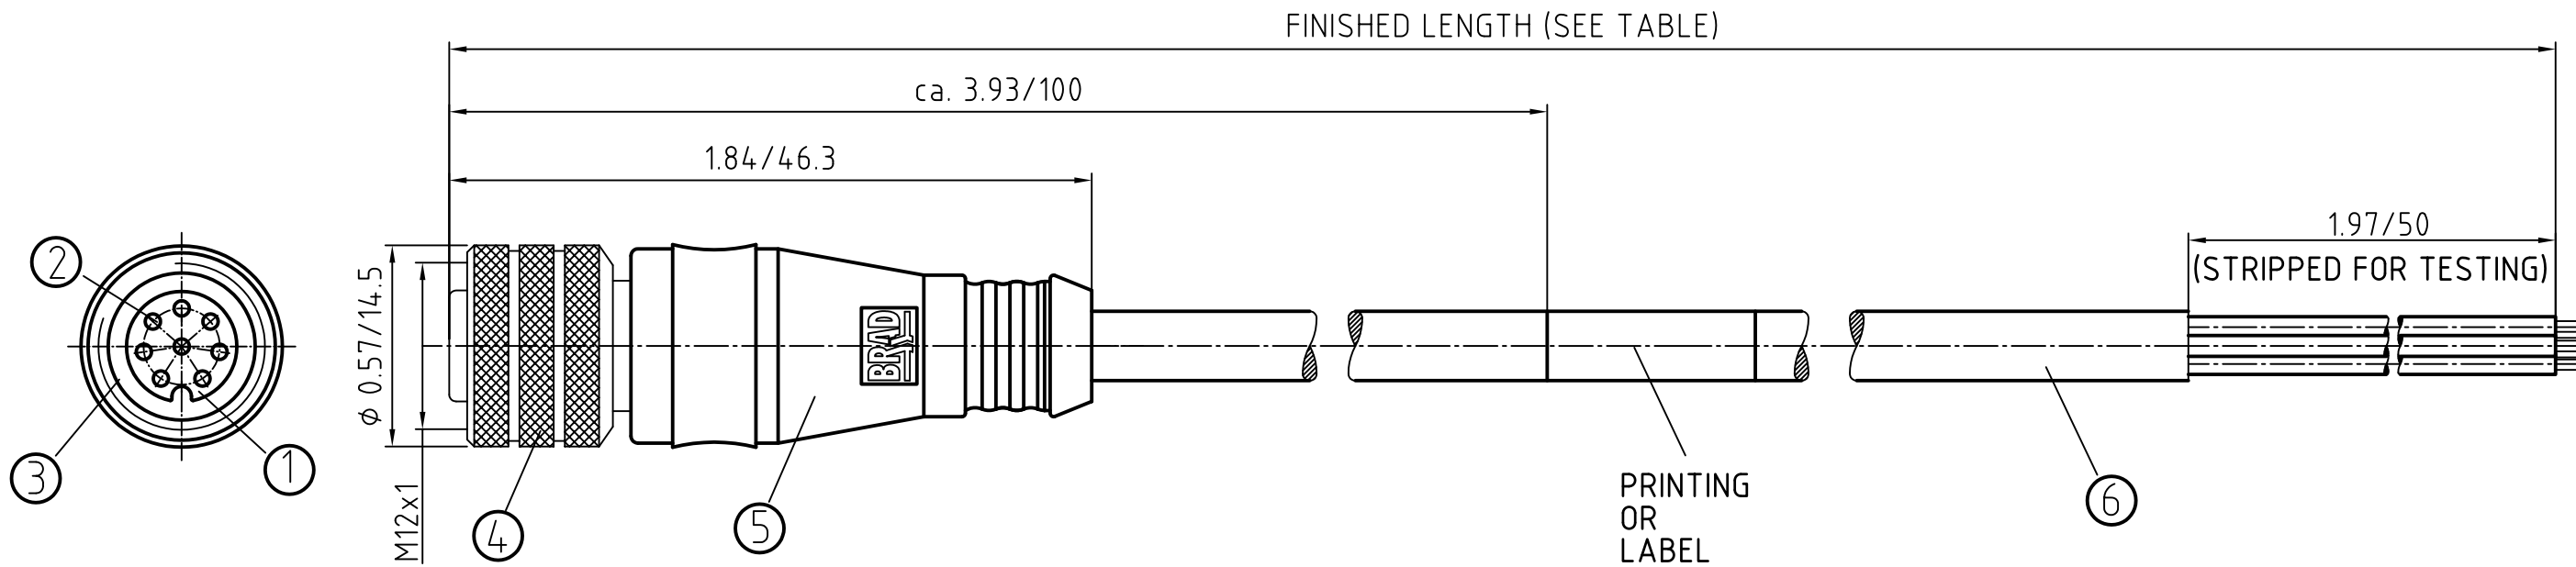

FEMALE FACE VIEW

8-POLE

WIRING DIAGRAM

1 WHITE

2 BROWN

3 GREEN

4 YELLOW

5 GREY

6 PINK

7 BLUE

8 RED

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
8	1200650951	808000P02M020	6.56' +3.50" -0 [2.0M +88.9 -0]

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT MATERIAL CONTACT PLATING	BRASS GOLD	CuZn Ni/Au
3	O-RING	VITON	RED
4	COUPLING NUT	BRASS	NICKEL PLATED
5	OVERMOLD	POLYURETHANE (PUR)	BLACK
6	CABLE- 0.25 ² /24 AWG (COPPER STRANDING) 8 CONDUCT. 300V	JACKET: PUR/PVC INSUL.: POLYPROP	JACKET: BLACK

CONNECTOR SPECIFICATION:

VOLTAGE RATING	30 VAC/36 VDC
AMPERAGE RATING	2 AMPS
PROTECTION CLASS	IP68
OPERATING TEMPERATURE	-30°C TO 80°C
UL CERTIFICATIONS	NOT APPLICABLE
CSA CERTIFICATIONS	NOT APPLICABLE

DESCRIPTION
EC NO.: WEU2010-0277
DRWN: LSTEMMLE 2010/01/13
CHKD: NS
APPR: NSTAUDIG 2010/01/26


QUALITY SYMBOLS
= 0
= 0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ±--- ±---
3 PLACES ±--- ±---
2 PLACES ±--- ±.01
1 PLACE ±0.3 ±---
ANGULAR ± --- °
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY DATE
CHECKED BY DATE
RE 2010/01/21
APPROVED BY DATE
NSTAUDIG 2010/01/25
MATERIAL NO.
SIZE A3

SCALE
2:1
DESIGN UNITS
METRIC
THIRD ANGLE PROJECTION
MICRO-CHANGE CORDSET
8-POL FEMALE STR SE
24/8 BLACK PUR/PVC CABLE
MOLEX INCORPORATED
SD-120065-030
SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

8 POL. FE

FEMALE INSERT 8P
VIEW FROM WIRES SIDE

Pin	WIRE COLOR	Wire color
1	WHITE	WH
2	BROWN	BN
3	GREEN	GN
4	YELLOW	YE
5	GREY	GY
6	PINK	PK
7	BLUE	BU
8	RED	RD


PART No MATRIX

8
8-Micro
Change0
0=Portable8
8=8 Core000
000 = Female StraightP 0 2
Cable-PUR, 8 x 0,25mmX
M=Metres
F=FeetX
LENGTH
020-2 METRES
050-5 METRES
200-20 METRESX
X
X
X


OPTIONS

X
XBlank=Black (Standard)
A=Grey
Y=YellowCoupling Nut Material
Blank=Standard
1=Stainless Steel
5=Delrin

Tablica tolerancji dlugosci Table of length tolerances		
Powyzej Over	Do-wlacznice Up to and including	Tolerancja (+) Tolerance
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% dlugosci of length



VIEW FROM FRONT SIDE

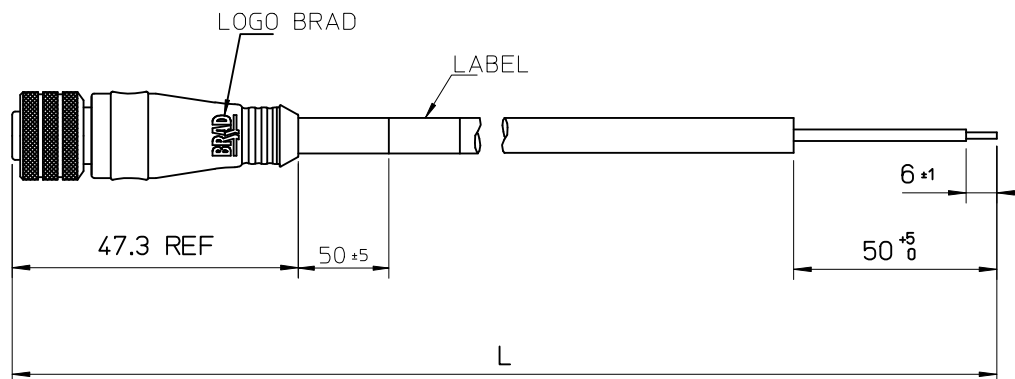

ORIGINAL RELEASE EC NO: IPG2013-0155 DRWN:HWALCZAK 2012/07/03 CHKD:JMARSZALEK 2012/08/01 APPR:MIWASIECZKO 2012/10/11	QUALITY SYMBOLS ▽=0 ◻=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 FIRST ANGLE PROJECTION
					DRAWN BY DATE		TITLE CSE M12 8P AC FE STR PUR XM SE UNSH		
					CHECKED BY DATE				
					APPROVED BY DATE				
			4 PLACES ± --- ± ---		HWALCZAK 2012/07/03		molex		
			3 PLACES ± --- ± ---		JMARSZALEK 2012/08/01				
			2 PLACES ± --- ± ---		MIWASIECZKO 2012/10/11				
			1 PLACE ± --- ± ---						
			0 PLACE ± --- ± ---						
			ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE KEY		SD-120065-060		1 OF 1			
A	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru