



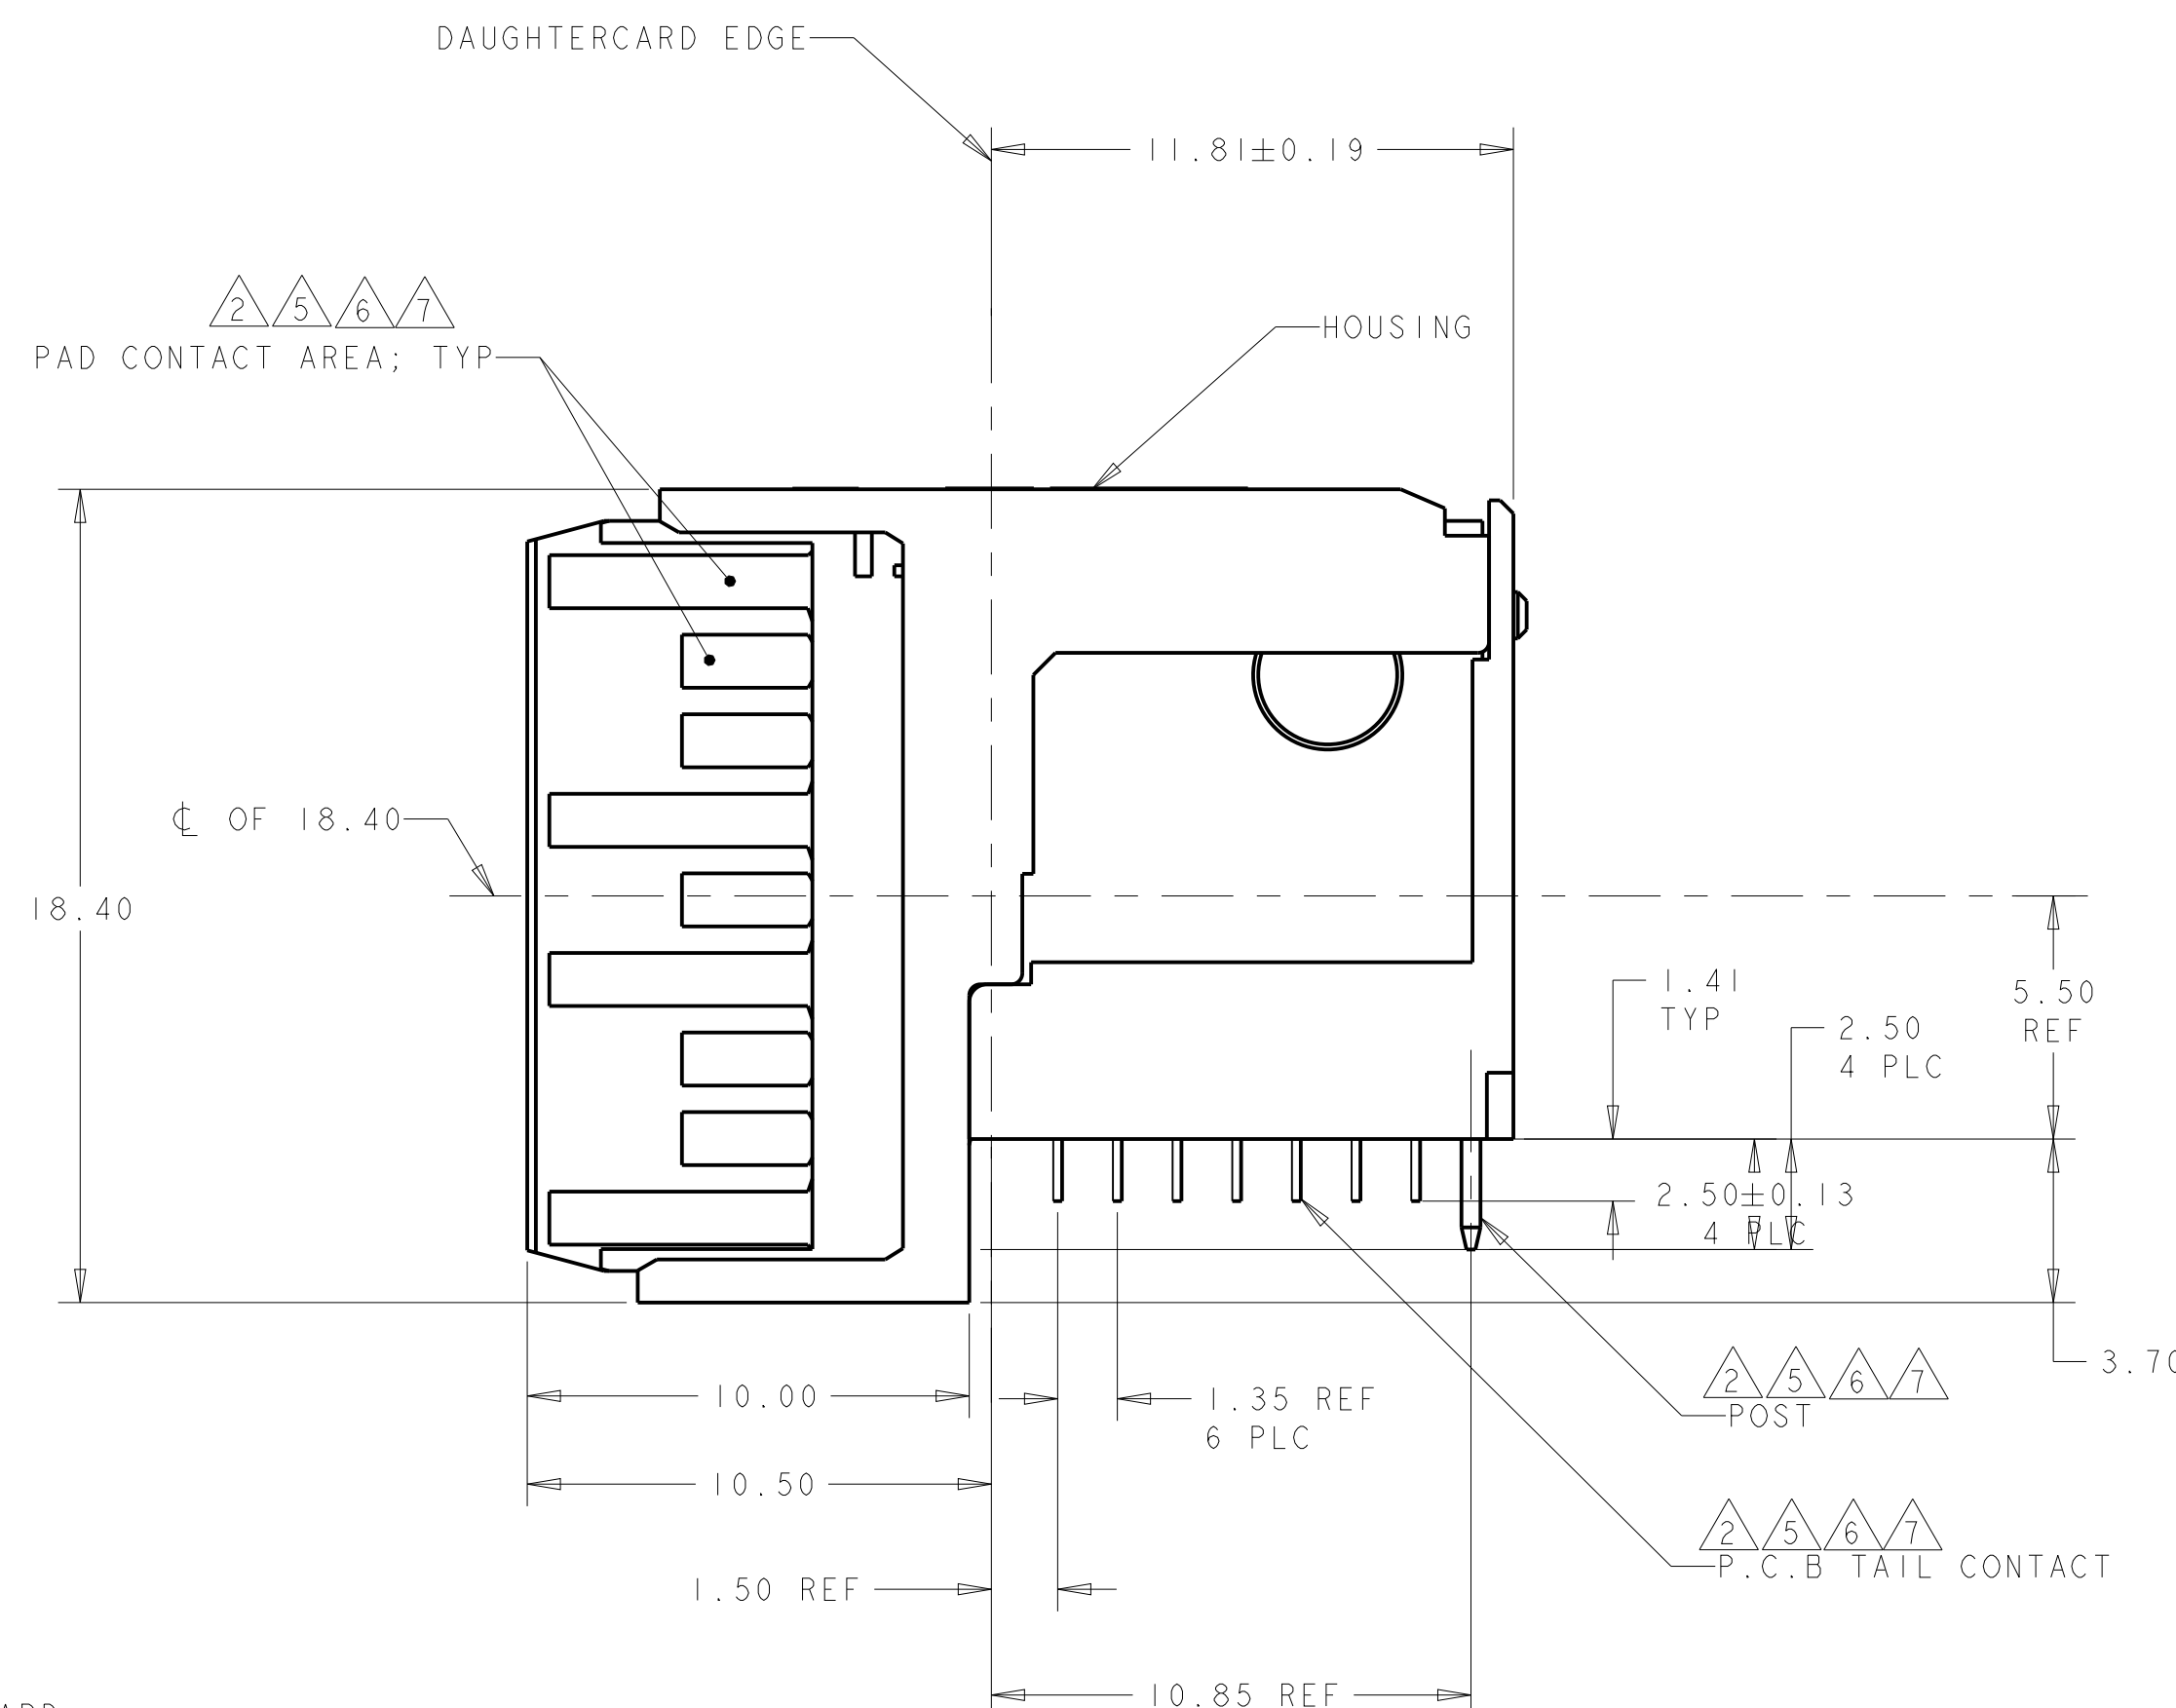

- ① HOUSING: LCP, UL94V0, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE
- ② CONTACT: 0.76 μ m MIN GOLD IN PAD CONTACT AREA,
1.27 μ m MIN TIN-LEAD ON PCB TAIL
OVER 1.27 μ m MIN NICKEL OVER ALL.
POST 1.27 μ m MIN NICKEL PLATED.
- ③ PLATE THROUGH HOLE PER 114-13056,
FIGURE 4.
- ④ SEE TABLE 1 FOR INTERCONNECTIONS TO
BACKPLANE CONNECTOR.
- ⑤ CONTACT: 0.76 μ m MIN GOLD IN PAD CONTACT AREA,
CONTACT: 1.27 μ m MIN TIN ON PCB TAIL
OVER 1.27 μ m MIN NICKEL OVER ALL.
POST 1.27 μ m MIN NICKEL PLATED.
- ⑥ CONTACT: 1.27 μ m MIN GOLD IN PAD CONTACT AREA,
1.27 μ m MIN TIN-LEAD ON PCB TAIL
OVER 1.27 μ m MIN NICKEL OVER ALL.
POST 1.27 μ m MIN NICKEL PLATED.
- ⑦ CONTACT: 1.27 μ m MIN GOLD IN PAD CONTACT AREA,
1.27 μ m MIN TIN ON PCB TAIL
OVER 1.27 μ m MIN NICKEL OVER ALL.
POST 1.27 μ m MIN NICKEL PLATED.

TYPICAL INTERCONNECTIONS FOR EACH COLUMN (WAFER): 1-16		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL	a x	b x
SIGNAL	b x	c x
SIGNAL	d x	e x
SIGNAL	f x	g x
SIGNAL	g x	h x
GROUND	c x, e x, (ALL COMMONED)	a x, d x, f x, i x

NOTE: " x " DESIGNATES THE COLUMN NUMBER

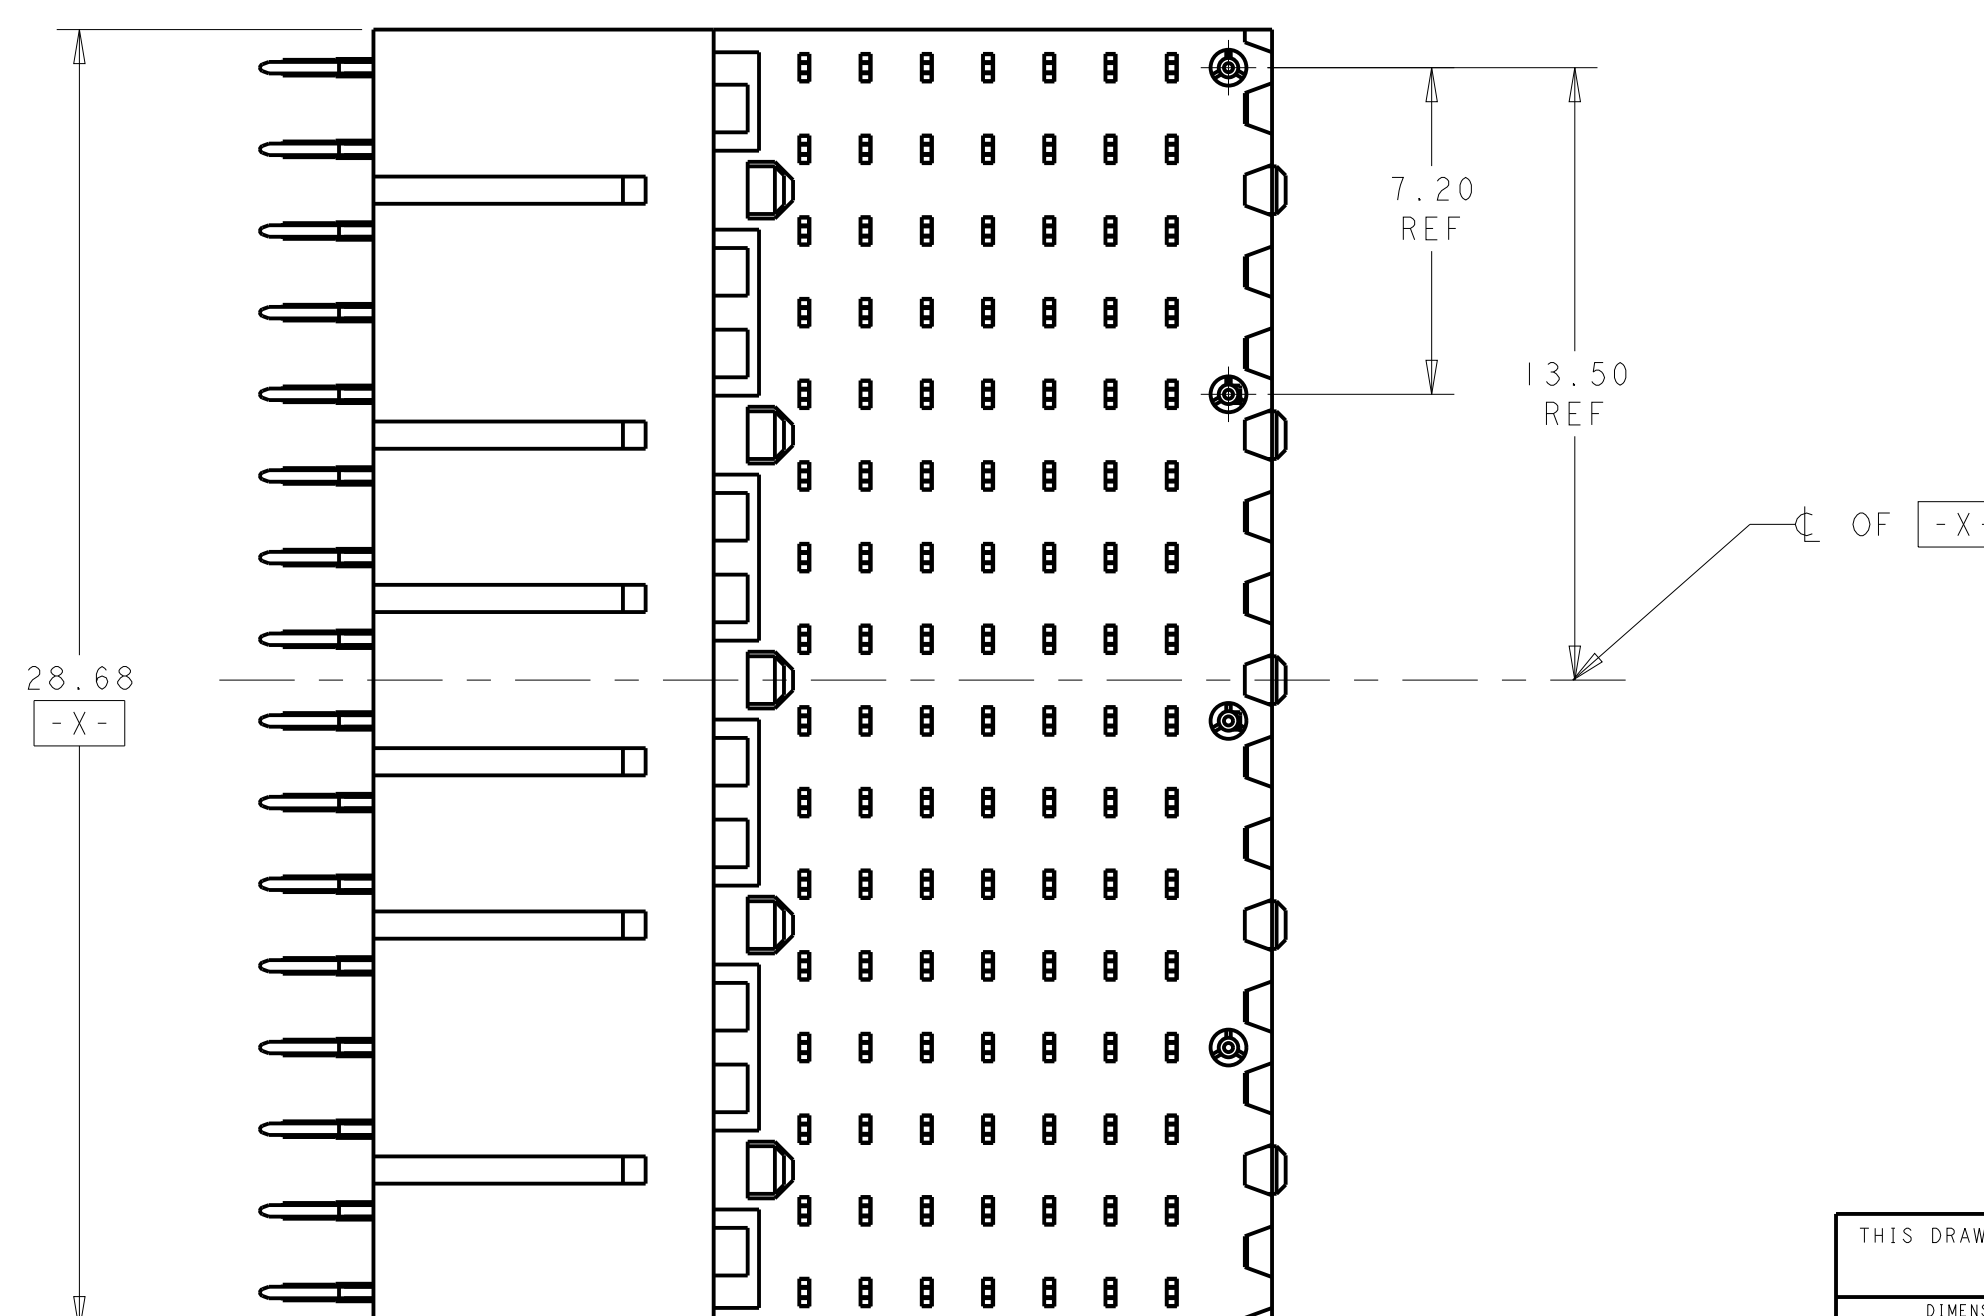


PC BOARD LAYOUT
(CONNECTOR SIDE)
SEE SHEET 2 FOR RTM
SCALE 5:1

	7	1410190-4
6		1410190-3
	5	1410190-2
2		1410190-1
PLATING		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 14 SEP 01JUN2004	FLATING		PART NO
DIMENSIONS: mm		CHK 14 SEP 01JUN2004	TE Connectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CONSOLE	RIGHT-ANGLE PLUG ASSEMBLY, 7 ROW, CENTER, 20.3mm, SINGLE ENDED.		
		G. GRIFFITH	Multigig RT2, DAUGHTERCARD CONNECTOR		
		PRODUCT SPEC 108-2072	SIZE		CAGE CODE
		APPLICATION SPEC 114-13056	DRAWING NO		RESTRICTED TO
		WEIGHT -	A100779C=1410190		-
		CUSTOMER DRAWING	SCALE		6:1
			SHEET		1 of 2
			REV		C

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
GP	00	-	-	SEE SHEET 1	-	-

REAR TRANSITION MODULE APPLICATION

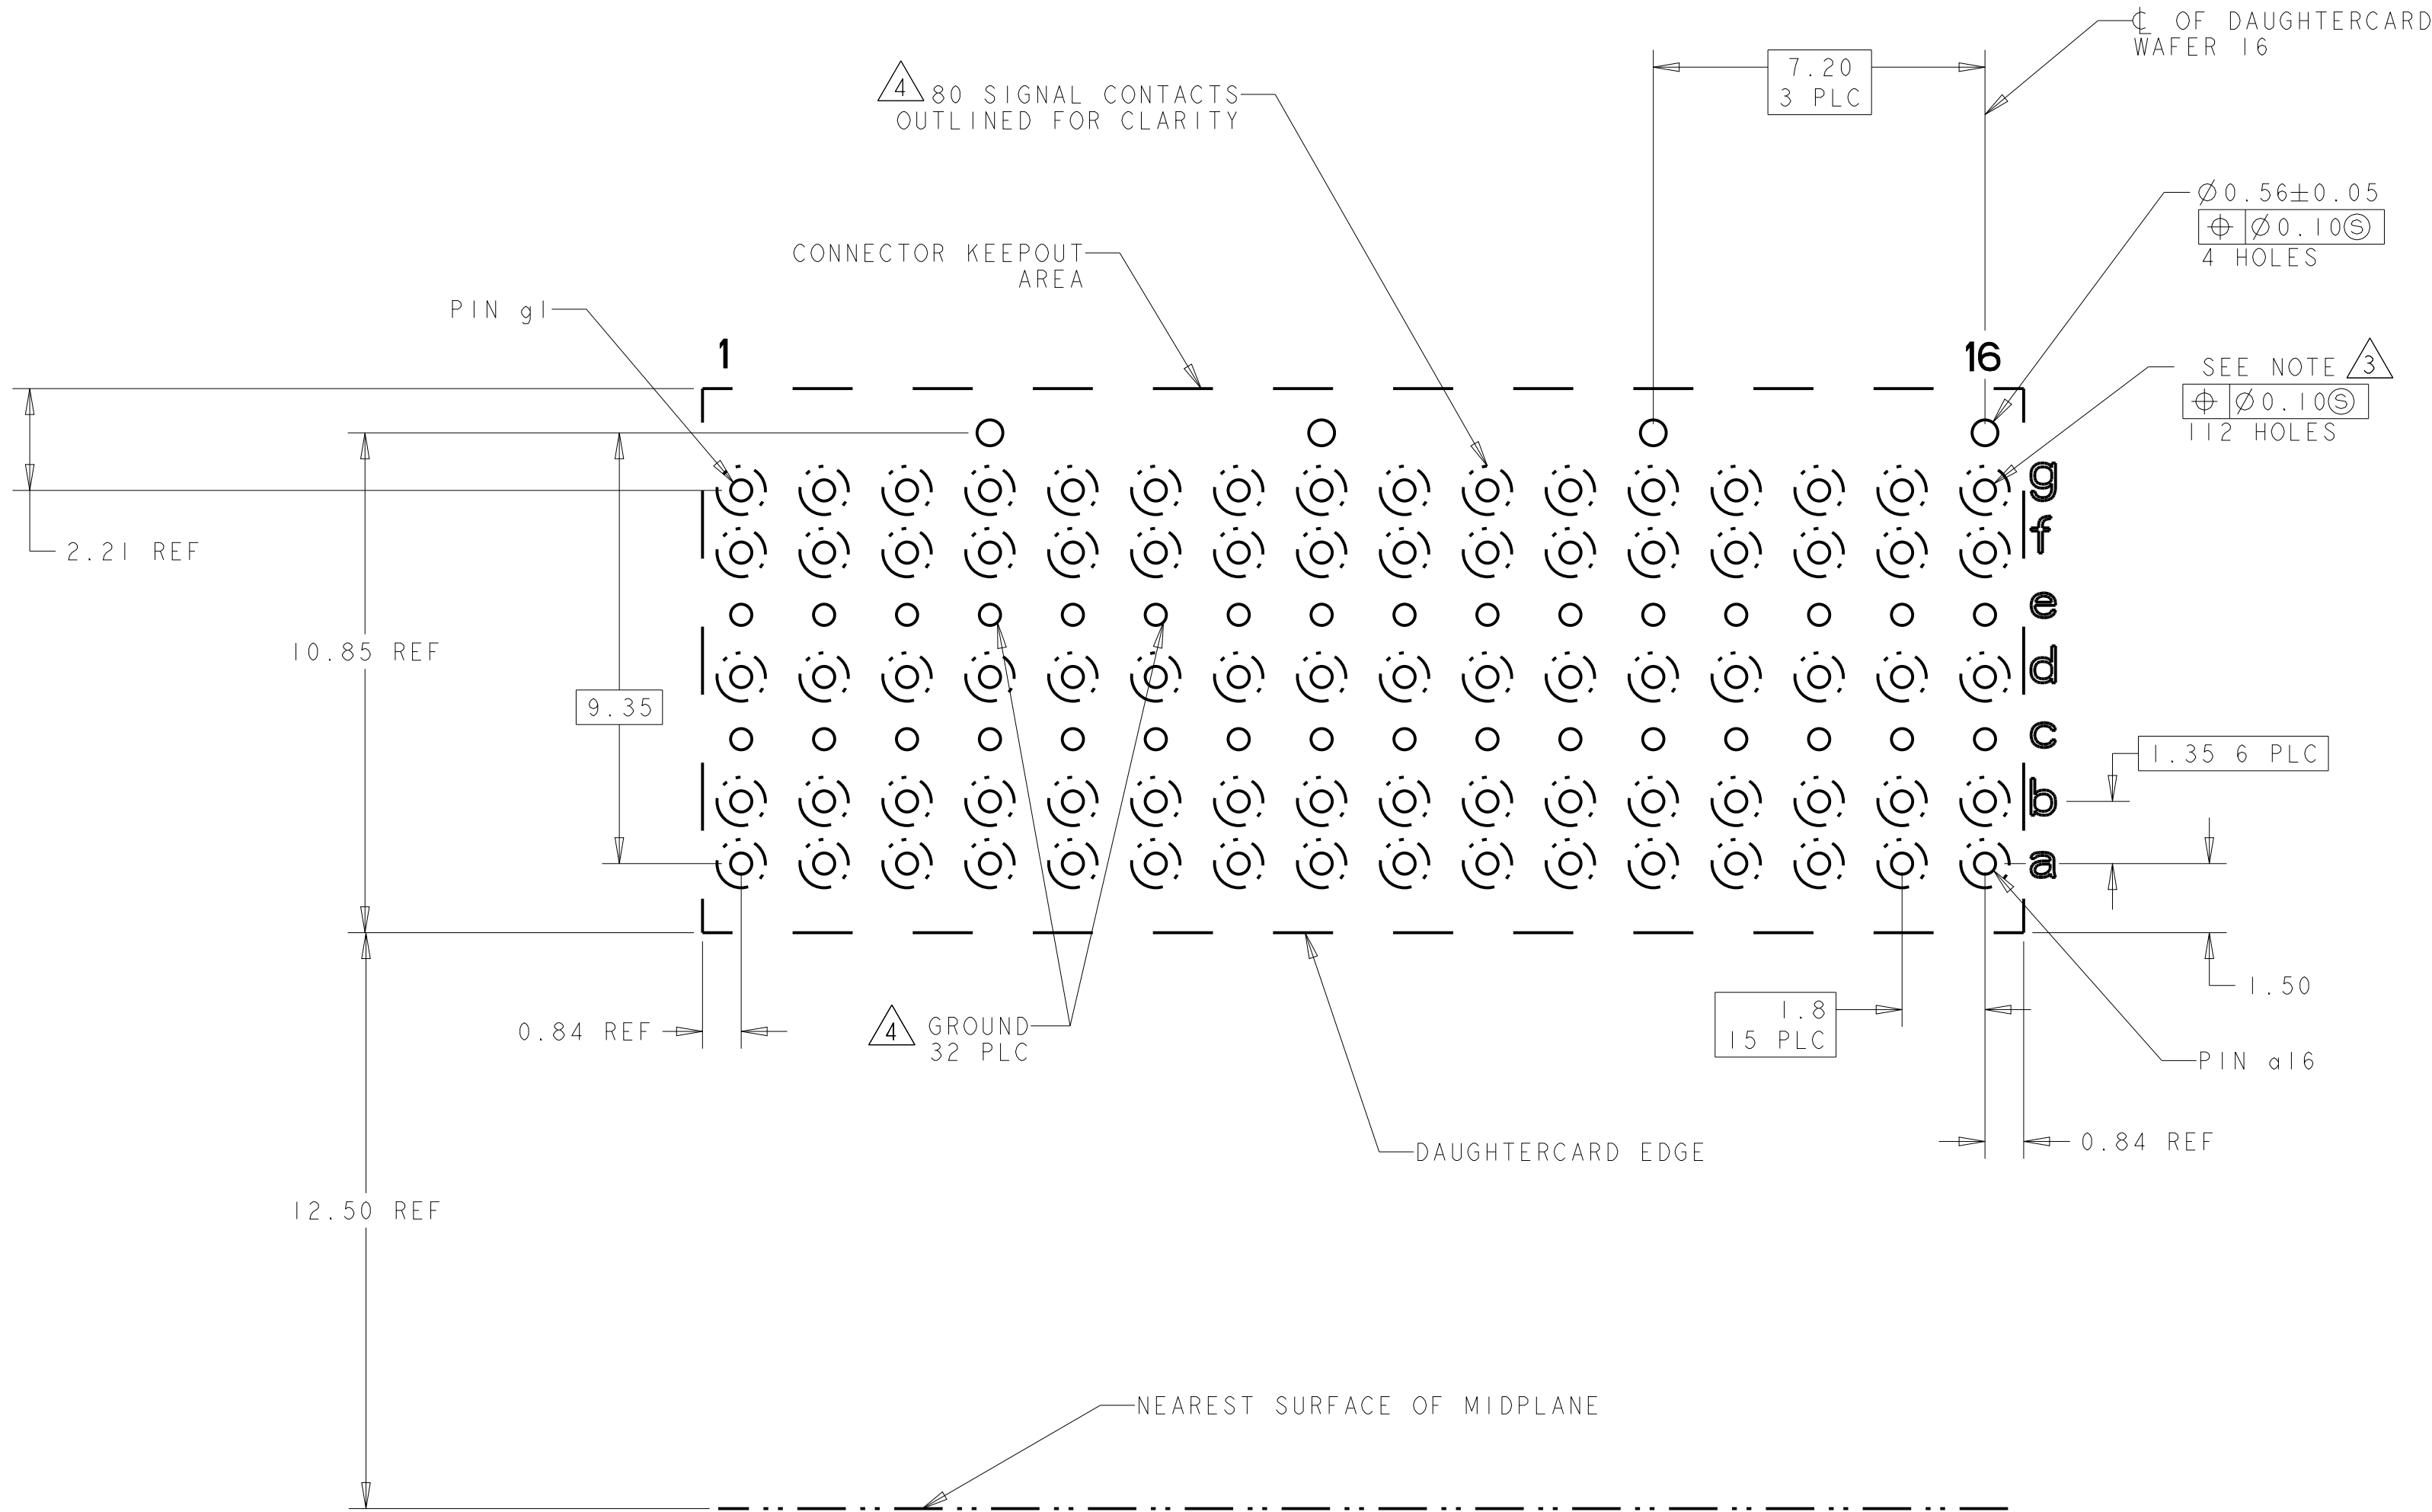

PC BOARD REAR TRANSITION MODULE
SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 01JUN2004		
DIMENSIONS: mm		CHK J.CONSOLE 01JUN2004		
		APVD G.GRIFFITH 14MAR2006	NAME RIGHT-ANGLE PLUG ASSEMBLY, 7 ROW, CENTER, 20.3mm, SINGLE ENDED, MultiGig RT2, DAUGHTERCARD CONNECTOR	
		PRODUCT SPEC 108-2072	SIZE A100779	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.5 1 PLC ±0.13 2 PLC ±.5 3 PLC ±.5 4 PLC ±.5 ANGLES ±1°		APPLICATION SPEC 114-13056	CAGE CODE 1410190	
FINISH SEE TABLE		WEIGHT -	RESTRICTED TO -	
MATERIAL -		CUSTOMER DRAWING		SCALE 6:1 SHEET 2 OF 2 REV C

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru