



mat'l. code		tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection	title		
A	T06-0138	S.Lin	7/25/06'		.XX ± 0.25	 MM	PCI-E EDGE CARD GEN3		
B	T07-1047	S.Lin	4/20/07		.XXX ± 0.15		280 P		
C	ELX-DG-21161-1	S T	05/27/15	angles	0° ± 2°	scale	product family	EDGE CARD	code
				dr	STONE LI	05/27/15	size	dwg no	TWN
				enr	STONE LI	05/27/15	A4	10066356	sheet
				chr	/	/	1 of		
				appd	PM ZHENG	05/27/15			
sheet index	revision sheet	C 1	C 2	C 3			cage code		

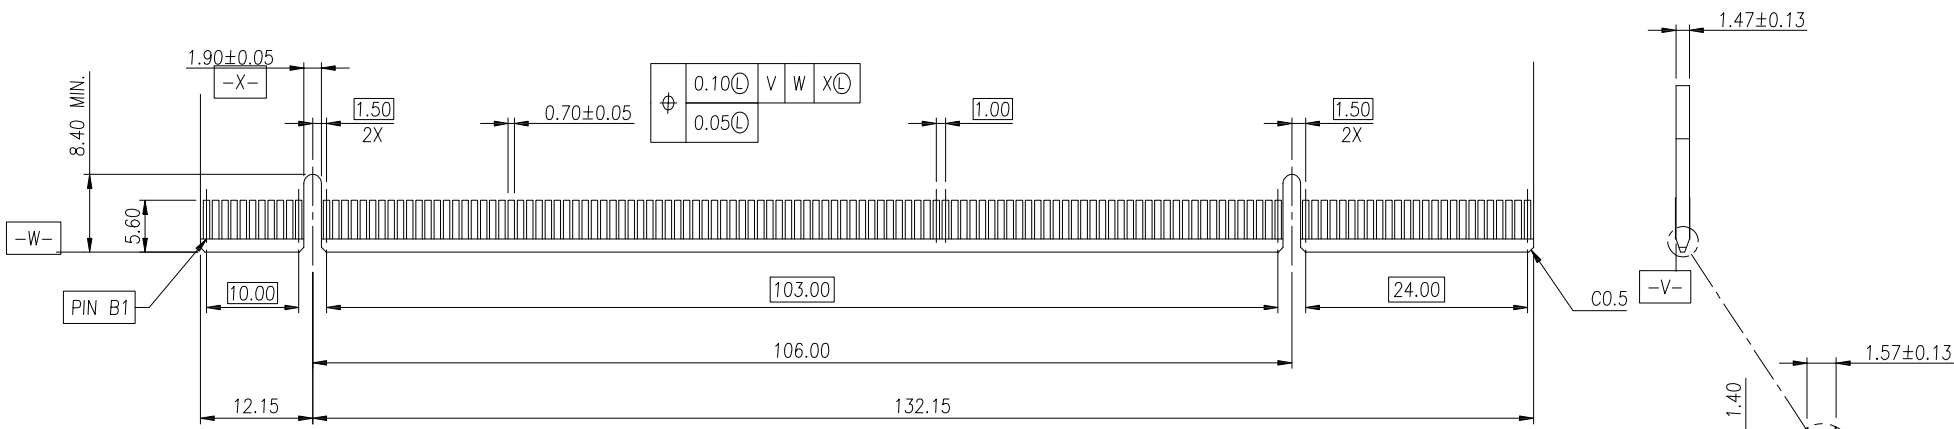

← I/O PANEL DIRECTION PRIMARY (COMPONENT) SIDE


ADD-IN CARD EDGE-FINGER DIMENSIONS



SCALE 2:1

A

A

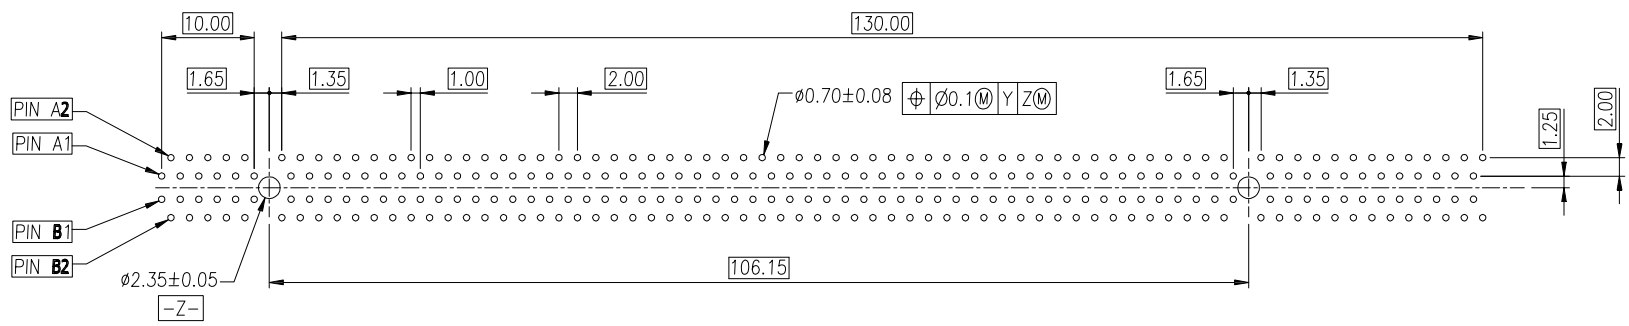

← I/O PANEL DIRECTION

-Y-
PCB SURFACE

RECOMMENDED FOOTPRINT

B

B

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fcjconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.38		projection	title		
					.XX ± 0.25			PCI-E EDGE CARD GEN3		
				angles	.XXX ± 0.15		 MM	280 P		
					0° ± 2°			product family EDGE CARD		
				dr	STONE LI	05/27/15	scale	size		code
				enr	STONE LI	05/27/15		dwg no		TWN
				chr	/	/	N/A	A4		sheet
				appd	PM ZHENG	05/27/15		10066356		2 of
sheet index	revision sheet						cage code			

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE NYLON, GLASS FILLED UL94V-0 RATED. SUITABLE FOR REFLOW SOLDERING.

TERMINAL: COPPER ALLOY

PLATING: 50u" NICKEL UNDERPLATE ALL OVER
CONTACT AREA PLATING - SEE PRODUCT NUMBER CODE
SOLDER TAIL: TIN 100u" MIN. OVER 50" NICKEL

METAL BOARD LOCKS: COPPER ALLOY
FINISH: 100u" TIN OVER 50u" NICKEL
UNDERPLATE SEE PRODUCT NUMBER CODE

2.PRODUCT SPECIFICATION: GS-12-233

3.THE HORIZONTAL AXIS FOR THE HOLE PATTERN IS ESTABLISHED BY A LINE THROUGH THE CENTER OF THE TWO Ø2.35 HOLES.
THE VERTICAL AXIS IS 90° TO THE HORIZONTAL AXIS, THROUGH THE CENTER OF DATUM Z.

4.CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.

5.RoHS COMPATIBLE PRODUCT SPECIFICATIONS

- a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 100 u" MINIMUM MATTE TIN OVER 50u" MINIMUM NICKEL UNDERPLATE.
- b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION .

6. PACKING SPEC : GS-14-1037

PRODUCT NUMBER CODE

10066356

-X X X X X □ □

HOUSING COLOR OPTIONS

1-BLACK

PEGS OPTIONS

0 - PLASTIC PEG

TERMINAL PLATING OPTIONS

- 0-50u" Ni UNDERPLATE
- 30u" Au CONTACT AREA
- 100u" TIN TAIL AREA ----- COMPATIBLE RoHS
- 1-50u" Ni UNDERPLATE
- 15u" Au CONTACT AREA
- 100u" TIN TAIL AREA ----- COMPATIBLE RoHS
- 2-50u" Ni UNDERPLATE
- GOLD FLASH CONTACT AREA
- 100u" TIN TAIL AREA ----- COMPATIBLE RoHS

LEAD FREE OPTION

"LF" FOR TERMINAL PLATING OPTION 0.1.2

PACKAGING OPTIONS

T-TRAY PACKAGING





RESERVED

0

TAIL LENGTH OPTIONS

TAIL LENGTH "E"	PCB THICKNESS
1 3.10 ±0.25 -0.13	2.36±0.10

- 0-50u" Ni UNDERPLATE
- 30u" Au CONTACT AREA
- 100u" TIN TAIL AREA ----- COMPATIBLE RoHS
- 1-50u" Ni UNDERPLATE
- 15u" Au CONTACT AREA
- 100u" TIN TAIL AREA ----- COMPATIBLE RoHS
- 2-50u" Ni UNDERPLATE
- GOLD FLASH CONTACT AREA
- 100u" TIN TAIL AREA ----- COMPATIBLE RoHS

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection		title		
					.XX ± 0.25			PCI-E EDGE CARD GEN3 		
				angles	.XXX ± 0.15		product family			
				dr	0° ±2°		EDGE CARD			
				enr	STONE LI 05/27/15	scale	size			
				chr	STONE LI 05/27/15		dwg no			
				appd	/ /	N/A	10066356			
					PM ZHENG 05/27/15		code			
sheet index		revision sheet					3 of			

cage code

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru