



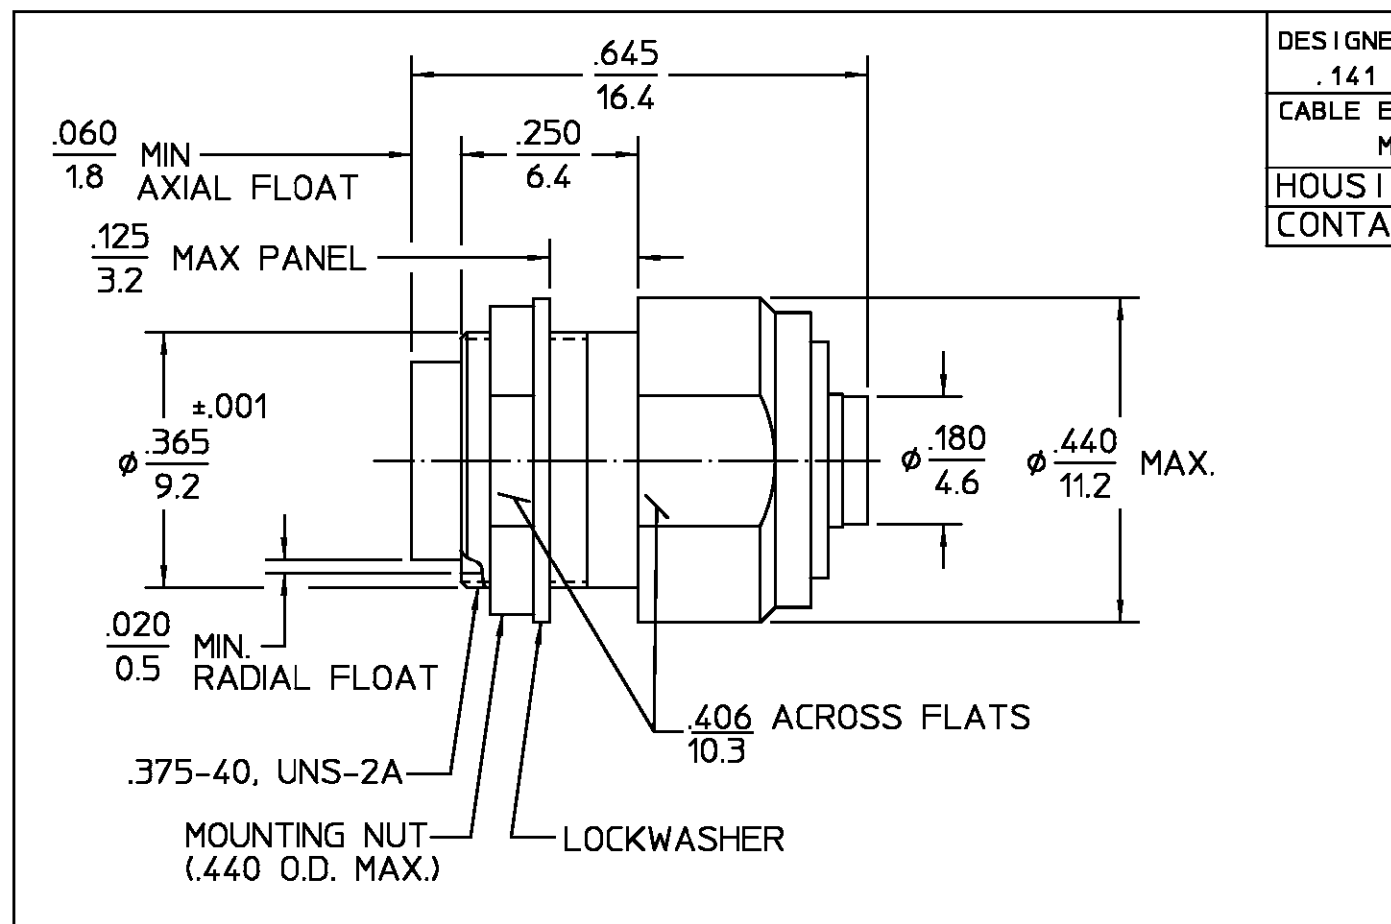

DESIGNED FOR USE WITH	.141 S.R. CABLE
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	.145
CONTACT	.0369

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
03 ₀	REVISED	6/30/97	PCV 7/1/97

RECOMMENDED
MOUNTING HOLE
scale: 2:1



NOTES:

1. CAPTURED CENTER CONTACT

HOUSING, OUTER MOUNTING NUT WASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
INNER HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT CONTACT SLEEVE	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
CONTACT RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	NICKEL PLATE PER QQ-N-290
LOCKWASHER	CARBON STEEL 1050	GOLD PLATE PER MIL-G-45204
SPRING	MUSIC WIRE	NICKEL PLATE PER QQ-N-290

ELECTRICAL	ELECTRICAL (cont)	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670	Temperature Rating -65° to +125°C
Frequency Range (GHz) DC to 22	I.R.(Megohms MIN) 5000	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 335		Shock MIL-STD-202, Method 213, Condition I
VSWR 1.05+.005f(GHz) DC to 18 GHz		Thermal Shock MIL-STD-202, Method 107, Condition B
1.05+.009f(GHz) DC to 22 GHz		Moisture Resistance MIL-STD-202, Method 106
Insertion Loss (dB MAX) .03x√f(GHz)		Corrosion - MIL-STD-202, Method 101, Condition B
RF Leakage (dB MIN) (Interface Only, Fully Mated) -(90-f(GHz))		
Corona, 70,000 Ft (VRMS MIN) 250		
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000		
Contact Resistance (Milliohms MAX)		
Center Contact 2.0		
Outer Contact 2.0		
Cable to Housing 0.5		

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY KCM DATE 1/29/88	AMP Incorporated
FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	CHECKED BY MH/M 3/30/88	140 Fourth Avenue
	APPD BY DC 3/30/88	Waltham, MA 02451-7599
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASSY PROCEDURE	TITLE OSP FLOATING PANEL FEEDTHRU CABLE JACK DIRECT SOLDER ATTACHMENT
	408-08281 (45-046)	SIZE B CODE IDENT NO. 26805 4522-7941-02 REV 03 ₀
	NO. A.P.	SCALE 4:1 SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1059505-1
SHEET 1 OF 1 REV A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru