


DESIGNED FOR USE WITH RD316 CABLES	
CABLE ENTRY DIAMETER MINIMUM	
FERRULE	.137
HOUSING	.062
CONTACT	.041

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	B1	REVISED PER ECO-09-026299		25Nov2009	AM	BOB

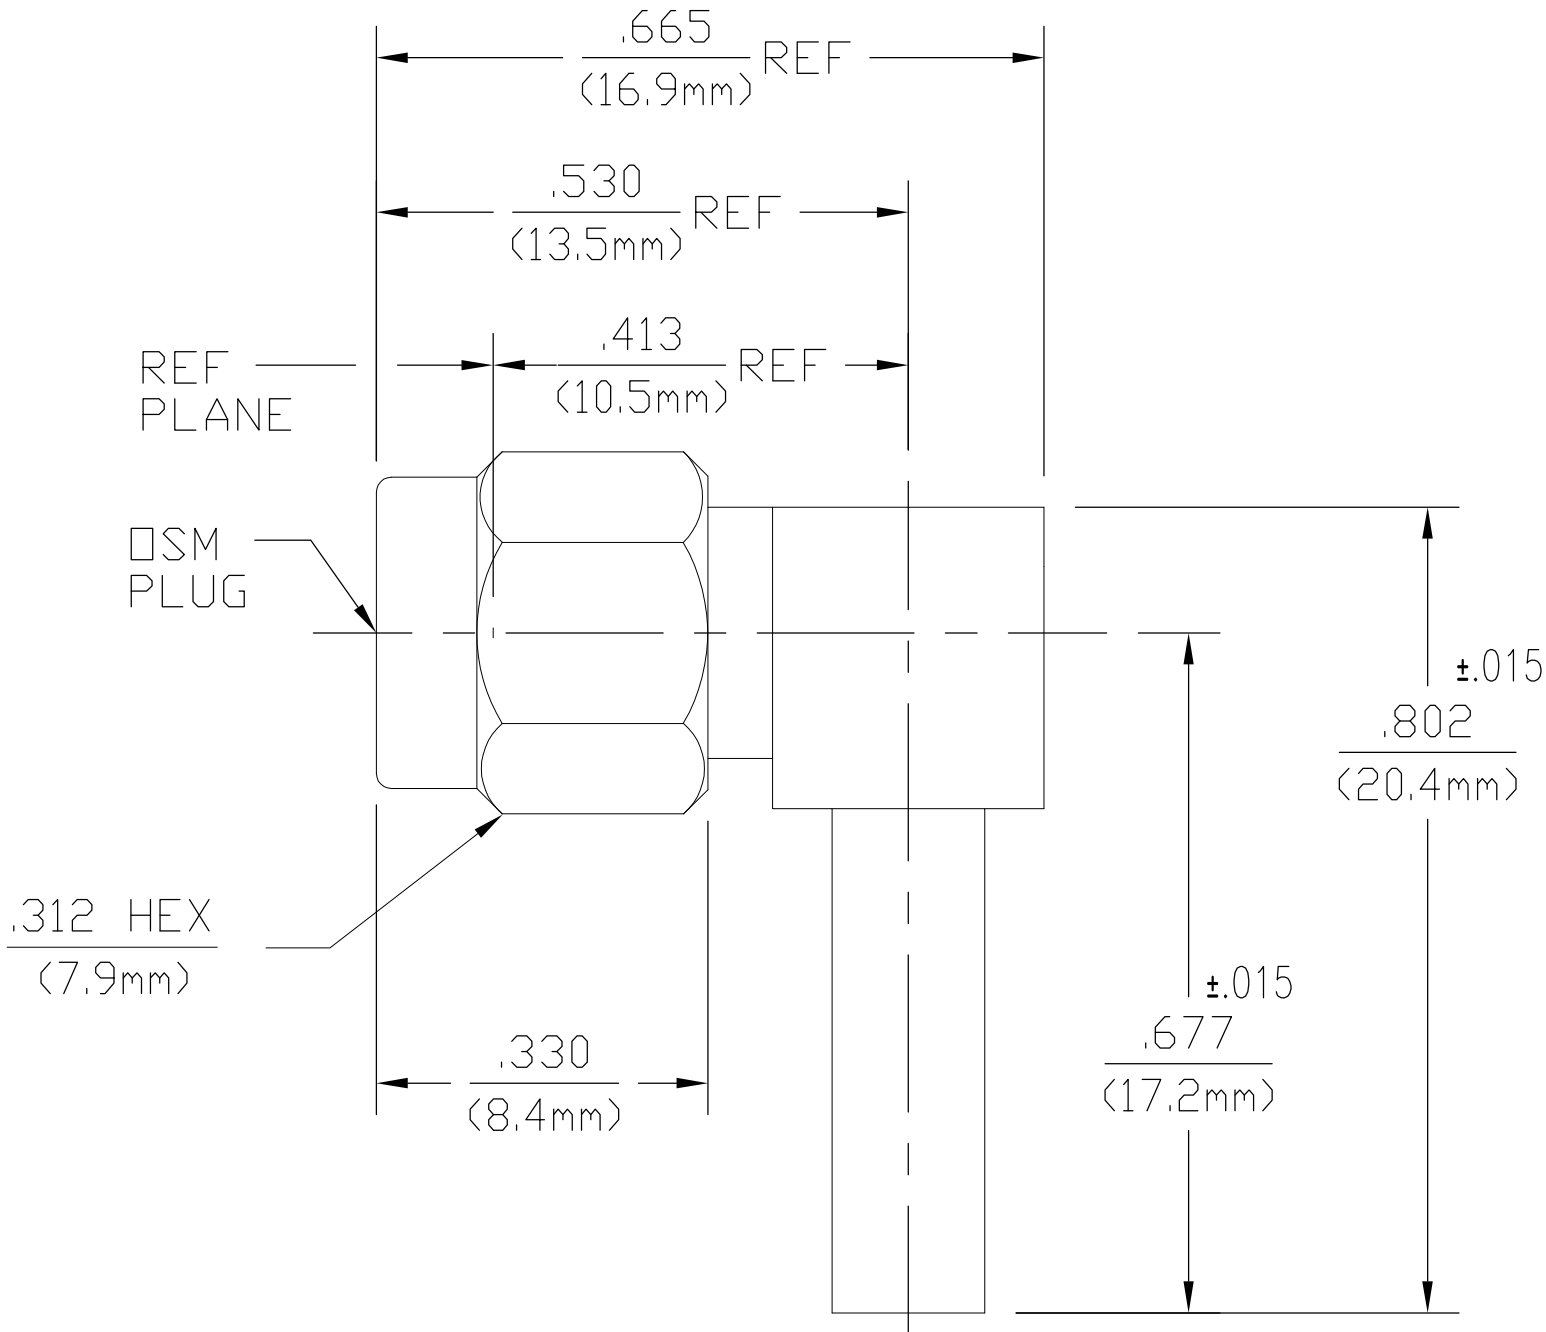

- 1
- BRASS

2

STAINLESS STEEL

3

BERYLLIUM COPPER

4

PTFE

5

SILICONE RUBBER

6

GOLD PLATE

7

NICKEL PLATE

8

PASSIVATE

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310.1	TEMPERATURE RATING -65°C TO +165°C
Frequency Range (GHz) DC to 12.4	Recommended Mating Torque 7-10 In-Lbs	DURABILITY:500 CYCLES
Volt Rating (VRMS MAX) @ Sea Level 250	Mating Characteristics:	.XXX = in XX.X = mm
VSWR 1.18+.02f(GHz)	Insertion (MAX Lbs) N/A	
Insertion Loss (dB MAX) .07 √f(GHz)	Withdrawal (MIN Oz) N/A	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Force to Engage and Disengage (In-Lbs MAX) 2.0	
Contact Resistance (Milliohms MAX)	Center Contact Captivation	
Center Contact 3.0	Axial (Lbs) 6.0	
Outer Contact 2.0	Radial (In-Oz) N/A	
Cable to Housing 0.5	Cable Retention	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500	Axial Force (Lbs) 20 Min	
I.R.(Megohms MIN) 5,000	Torque (In-Oz) N/A	
	Weight (Grams) TBD	

1 7	1 7	1 7	4	1 6	1 7	3	5	1056456-3
2 8	2 8	2 8	4	1 6	1 7	3	5	1056456-1
CAP	HOUSING	COUPLING NUT	DIELEC-TRIC	CENTER CONTACT	FERRULE	RETAINING RING	GASKET	TE PN.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BB CHK —	2/1/93 —	Tyco Electronics Tyco Electronics Corporation Kunshan,Jiangsu, RPC 215312					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME			
	0 PLC	±	—	OSM RIGHT ANGLE CABLE PLUG CRIMP ATTACHMENT —					
	1 PLC	±	—						
	2 PLC	±	—						
	3 PLC	±	—						
	4 PLC	±	—						
ANGLES		± —							
MATERIAL	FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
—	—		—		A2	00779	C=1056456	—	
CUSTOMER DRAWING						SCALE	SHEET		REV
						4:1	1 of 1		B1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru