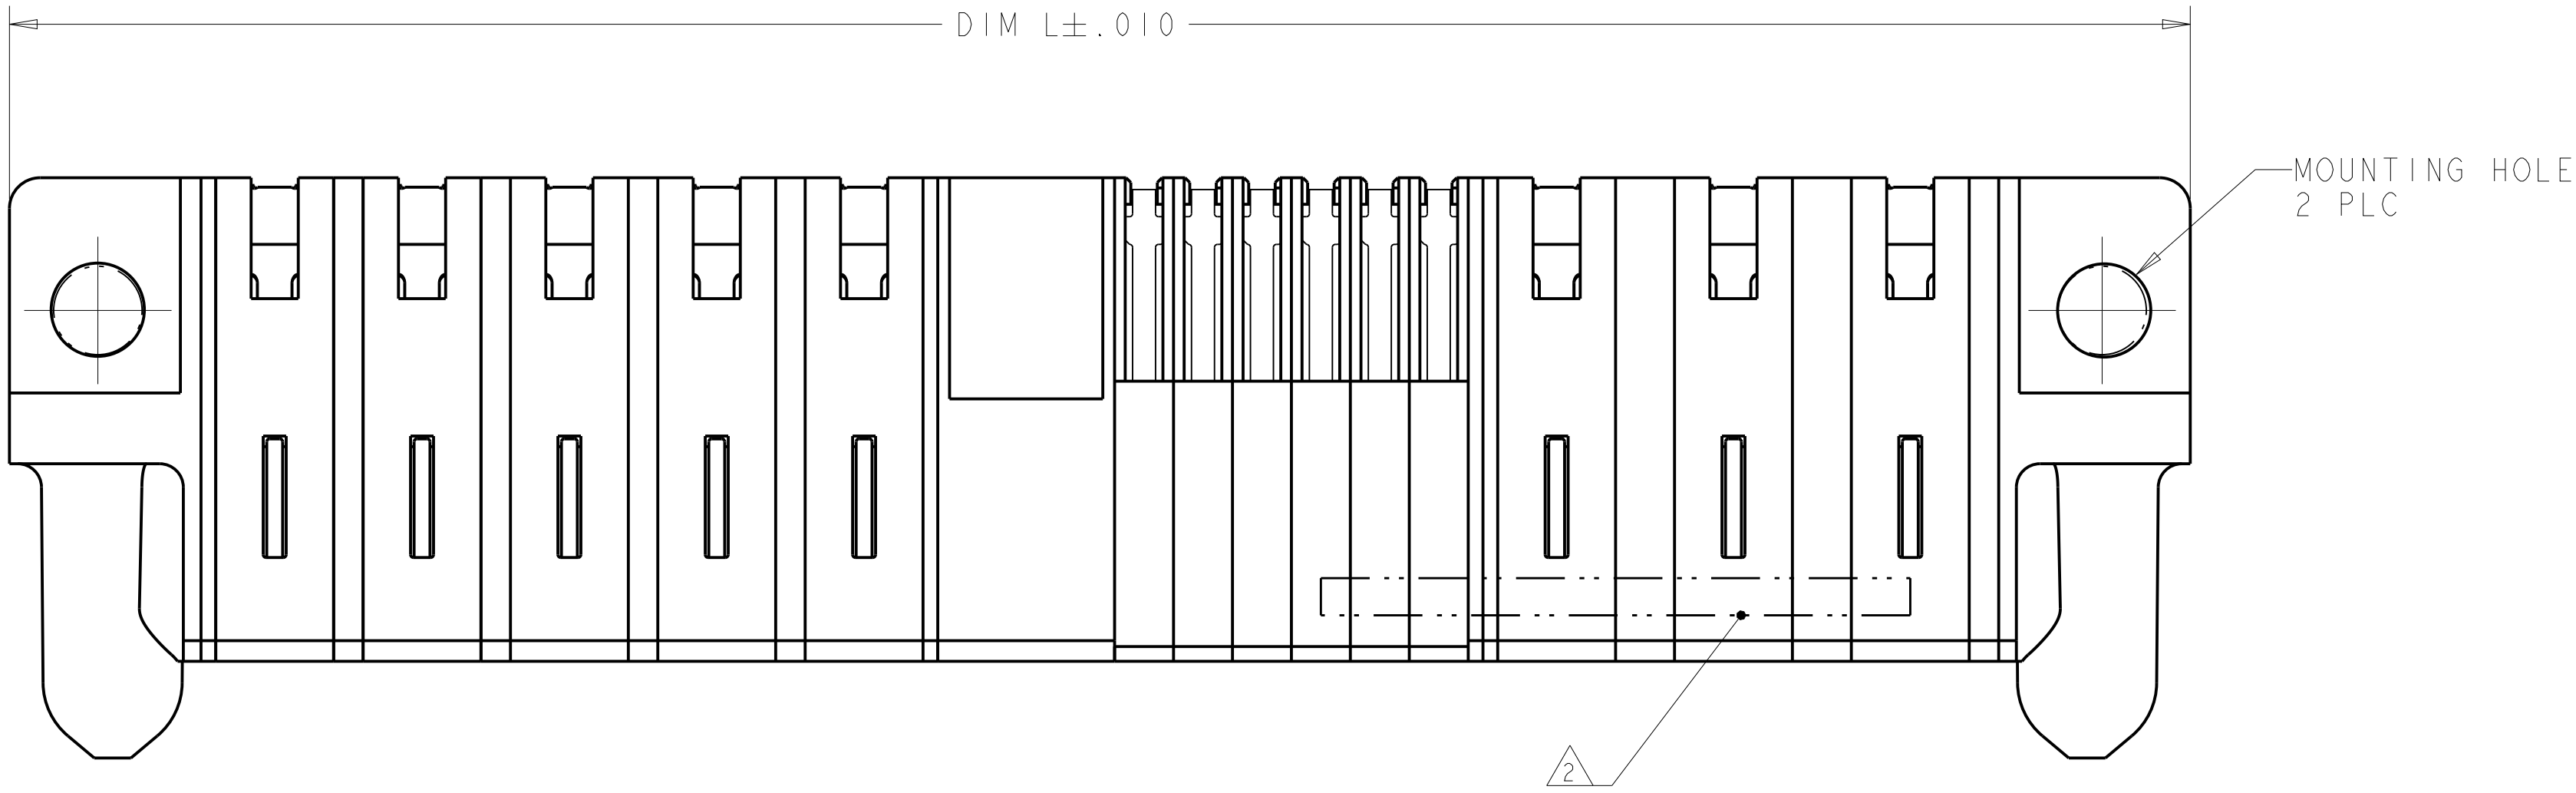
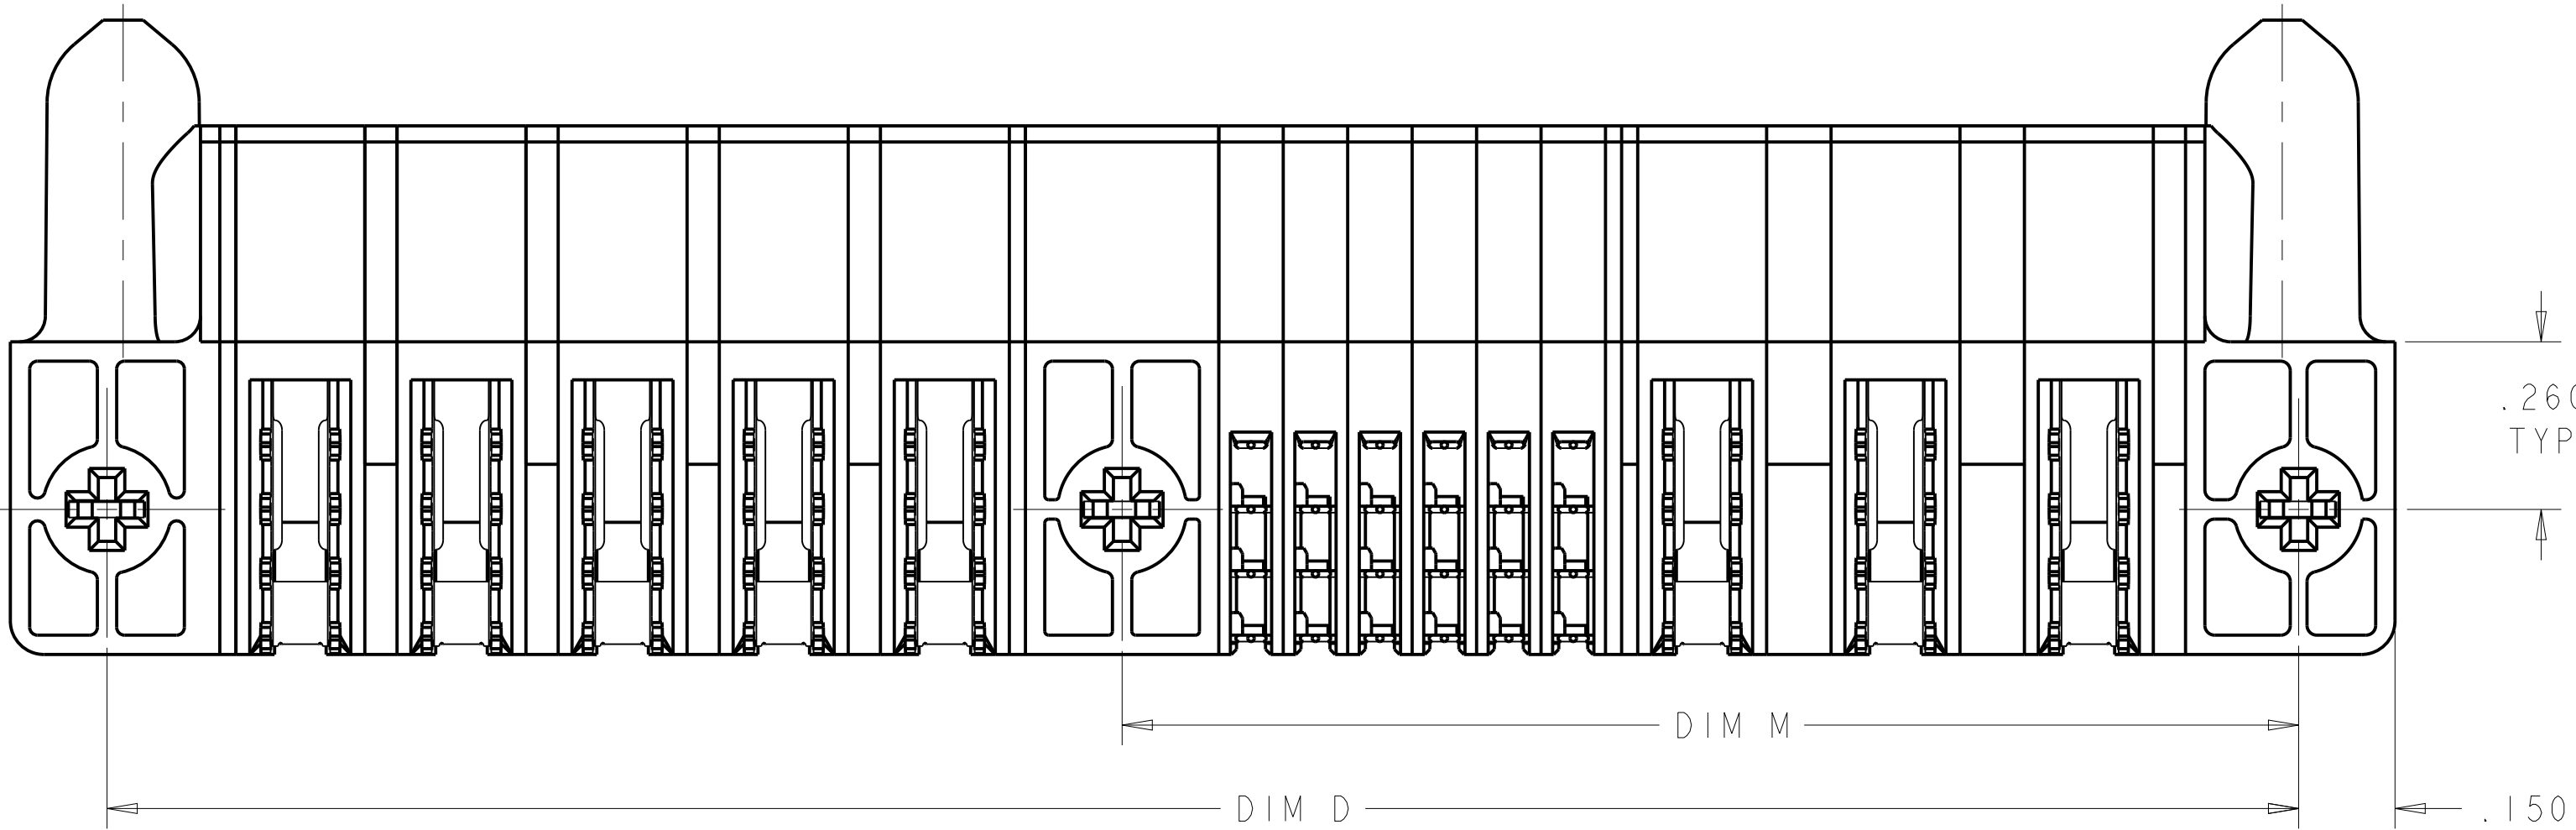
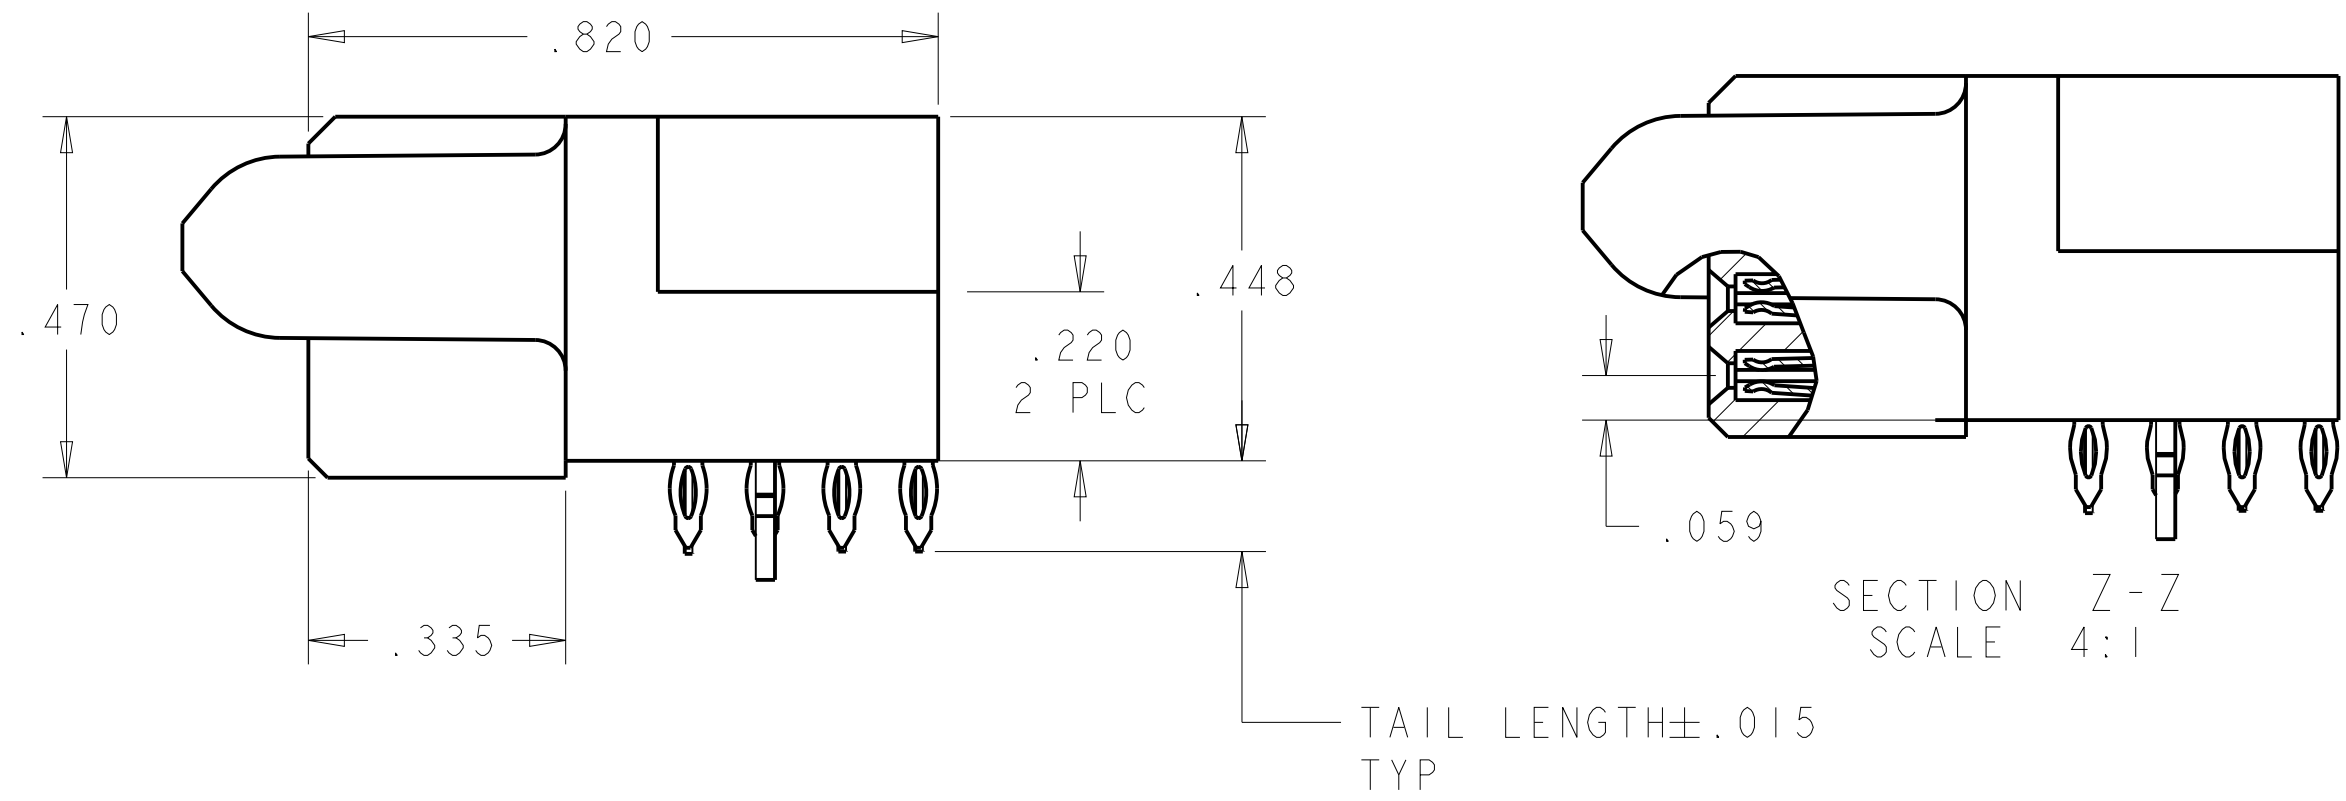
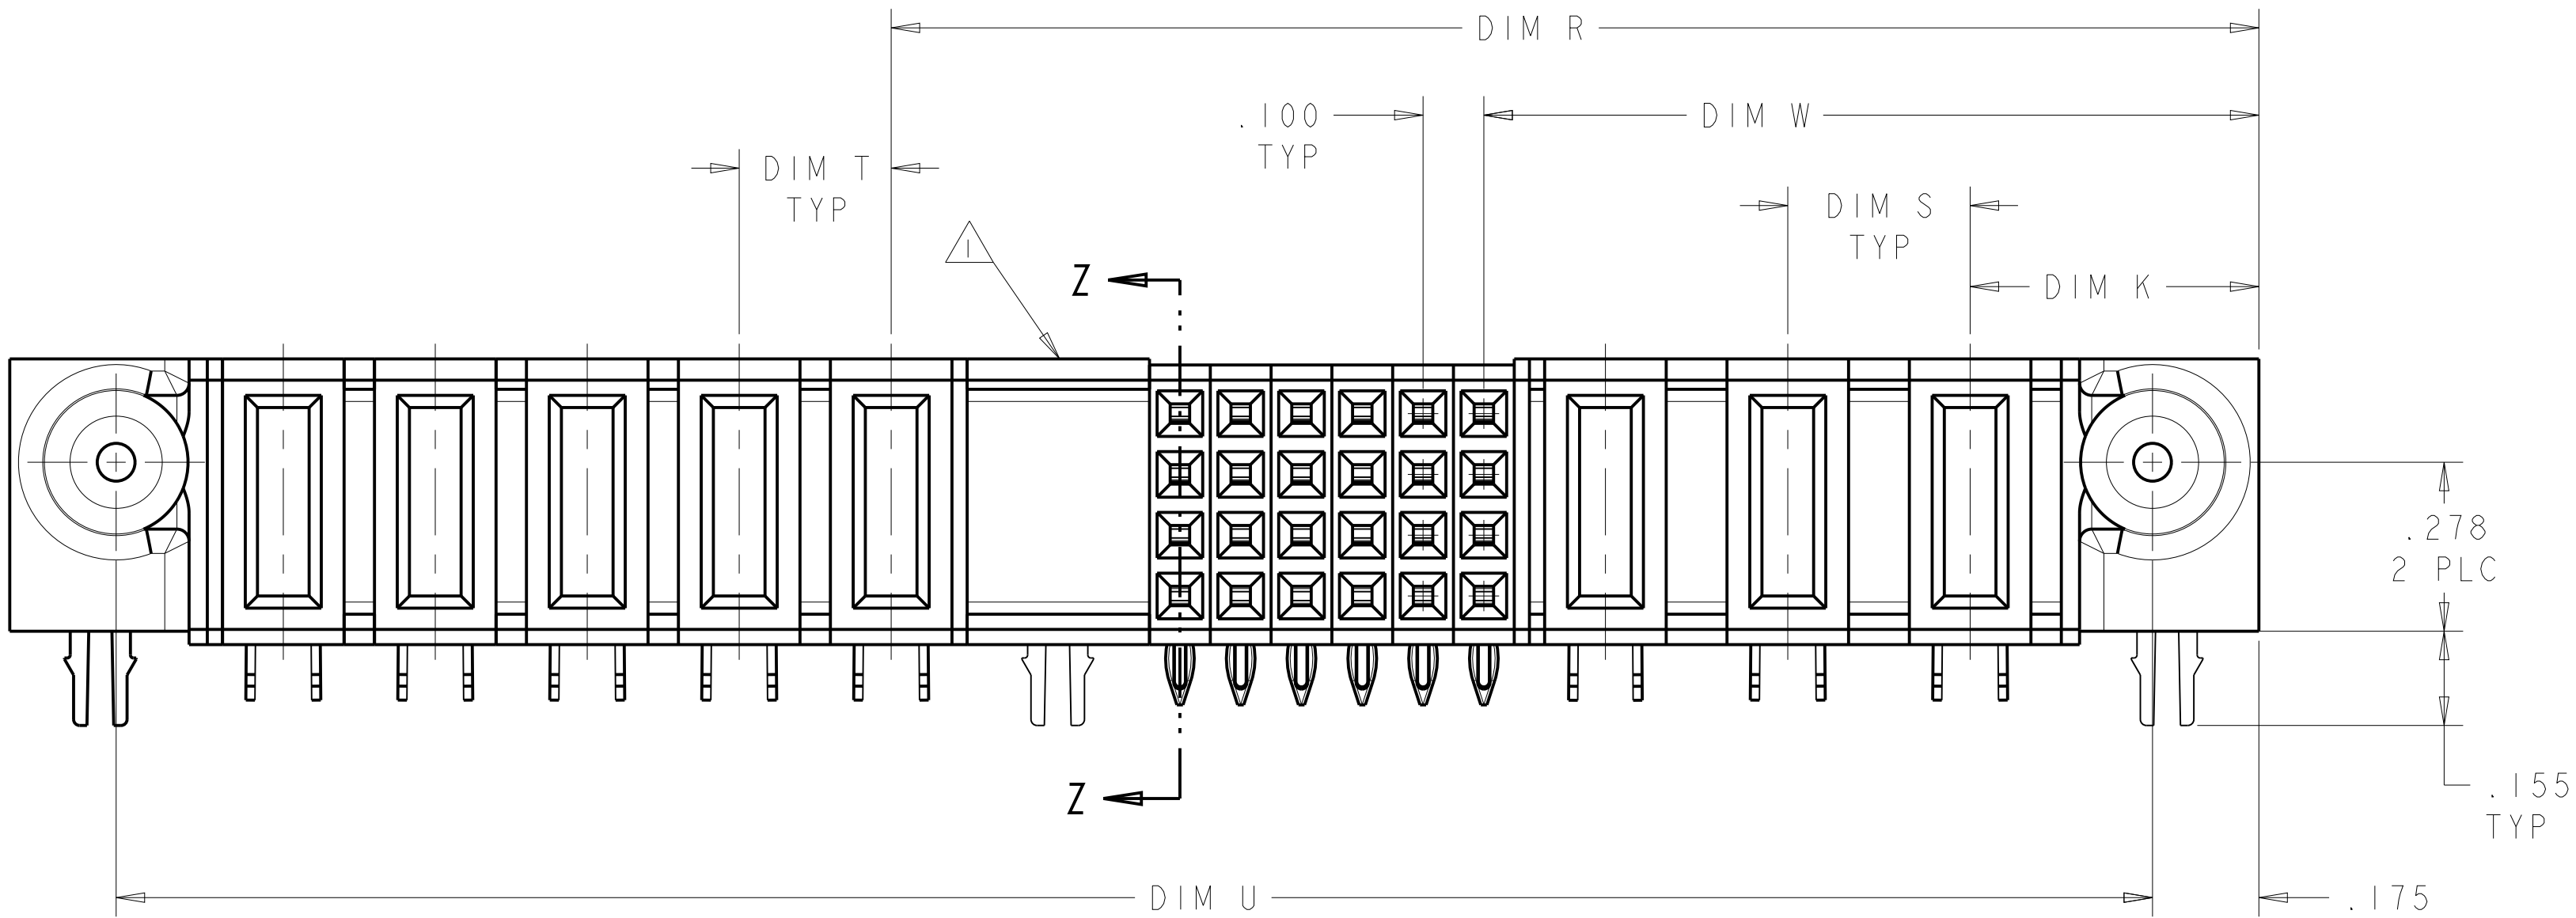


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D5	RELEASE 1-7	21OCT2013	CZ	SZ
			D6	RELEASE 1-8 AND 1-9	21JAN2014	AL	SZ



- 1 OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE.
- 2 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB- ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 8 PCB- Ø.0453 +/- .0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER
.001-.003 PLATING TO ACHIEVE .040 DIA HOLE.
- 9 1450570-1 HOLD DOWN SEATING DEPTH = .185



D6	N/A	3.250	.300	.250	1.650	1.375	3.300	-	3.600	.450	4P + 8S + 6P	1-6450570-9
	N/A	3.150	.300	.250	1.850	1.375	3.200	-	3.500	.450	4P + 16S + 5P	1-6450570-8
	N/A	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	1-6450570-7
	N/A	3.100	.250	.250	2.250	1.875	3.150	-	3.450	.450	6P + 12S + 4P	1-6450570-6
	.150	1.400	.250	.250	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	1-6450570-5
	N/A	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	1-6450570-4
	N/A	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	1-6450570-3
	N/A	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	1-6450570-2
	N/A	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	1-6450570-0
	.150	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	6450570-9
	N/A	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450570-6
	.122	5.450	.250	.250	3.350	2.375	5.500	-	5.800	.450	8P + 36S + 9P	6450570-3
	N/A	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450570-2
	N/A	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450570-1
MOUNTING HOLES	DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.002

ANGLES ±.002

MATERIAL

FINISH

OWN: R. GRZYBOWSKI

CHK: M. PERCHERKE

APVD: M. PERCHERKE

DATE: 25MAY2005

NAME

PRODUCT SPEC

APPLICATION SPEC

CAGE CODE

DRAWING NO

WEIGHT

CUSTOMER DRAWING

TE Connectivity

RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE: A1

CAGE CODE: 100779

DRAWING NO: 6450570

RESTRICTED TO






SCALE: 4:1

SHEET: 1

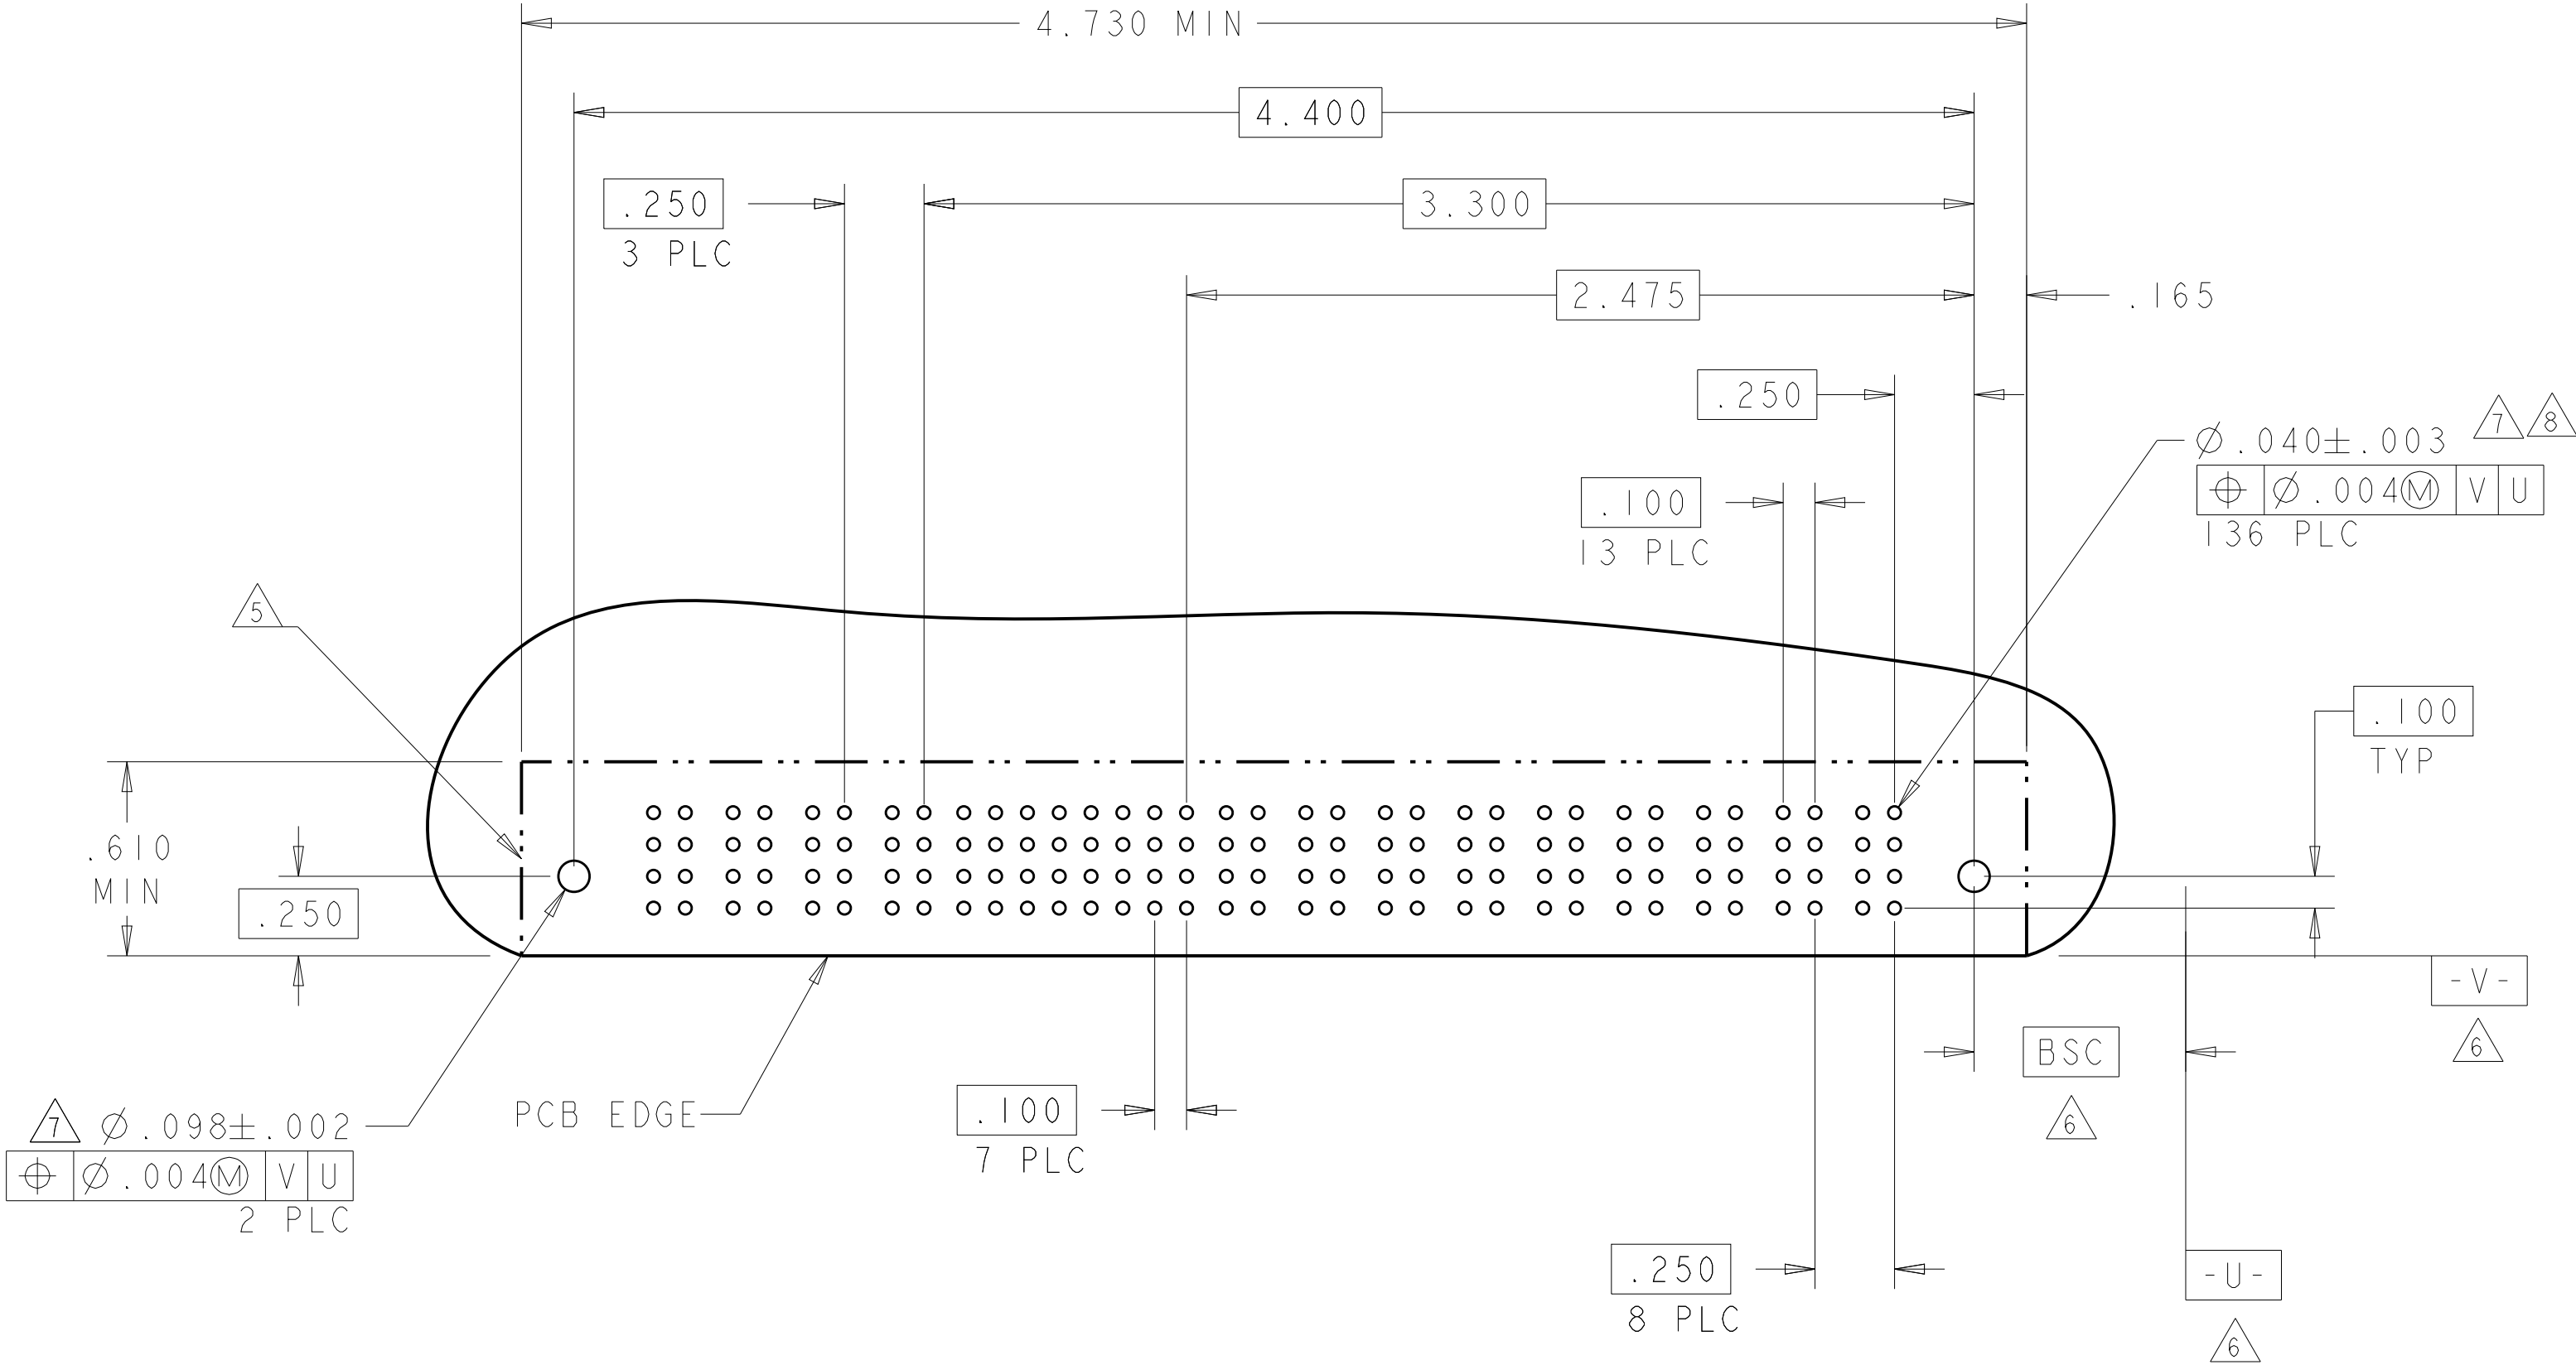
OF: 7

REV: D6

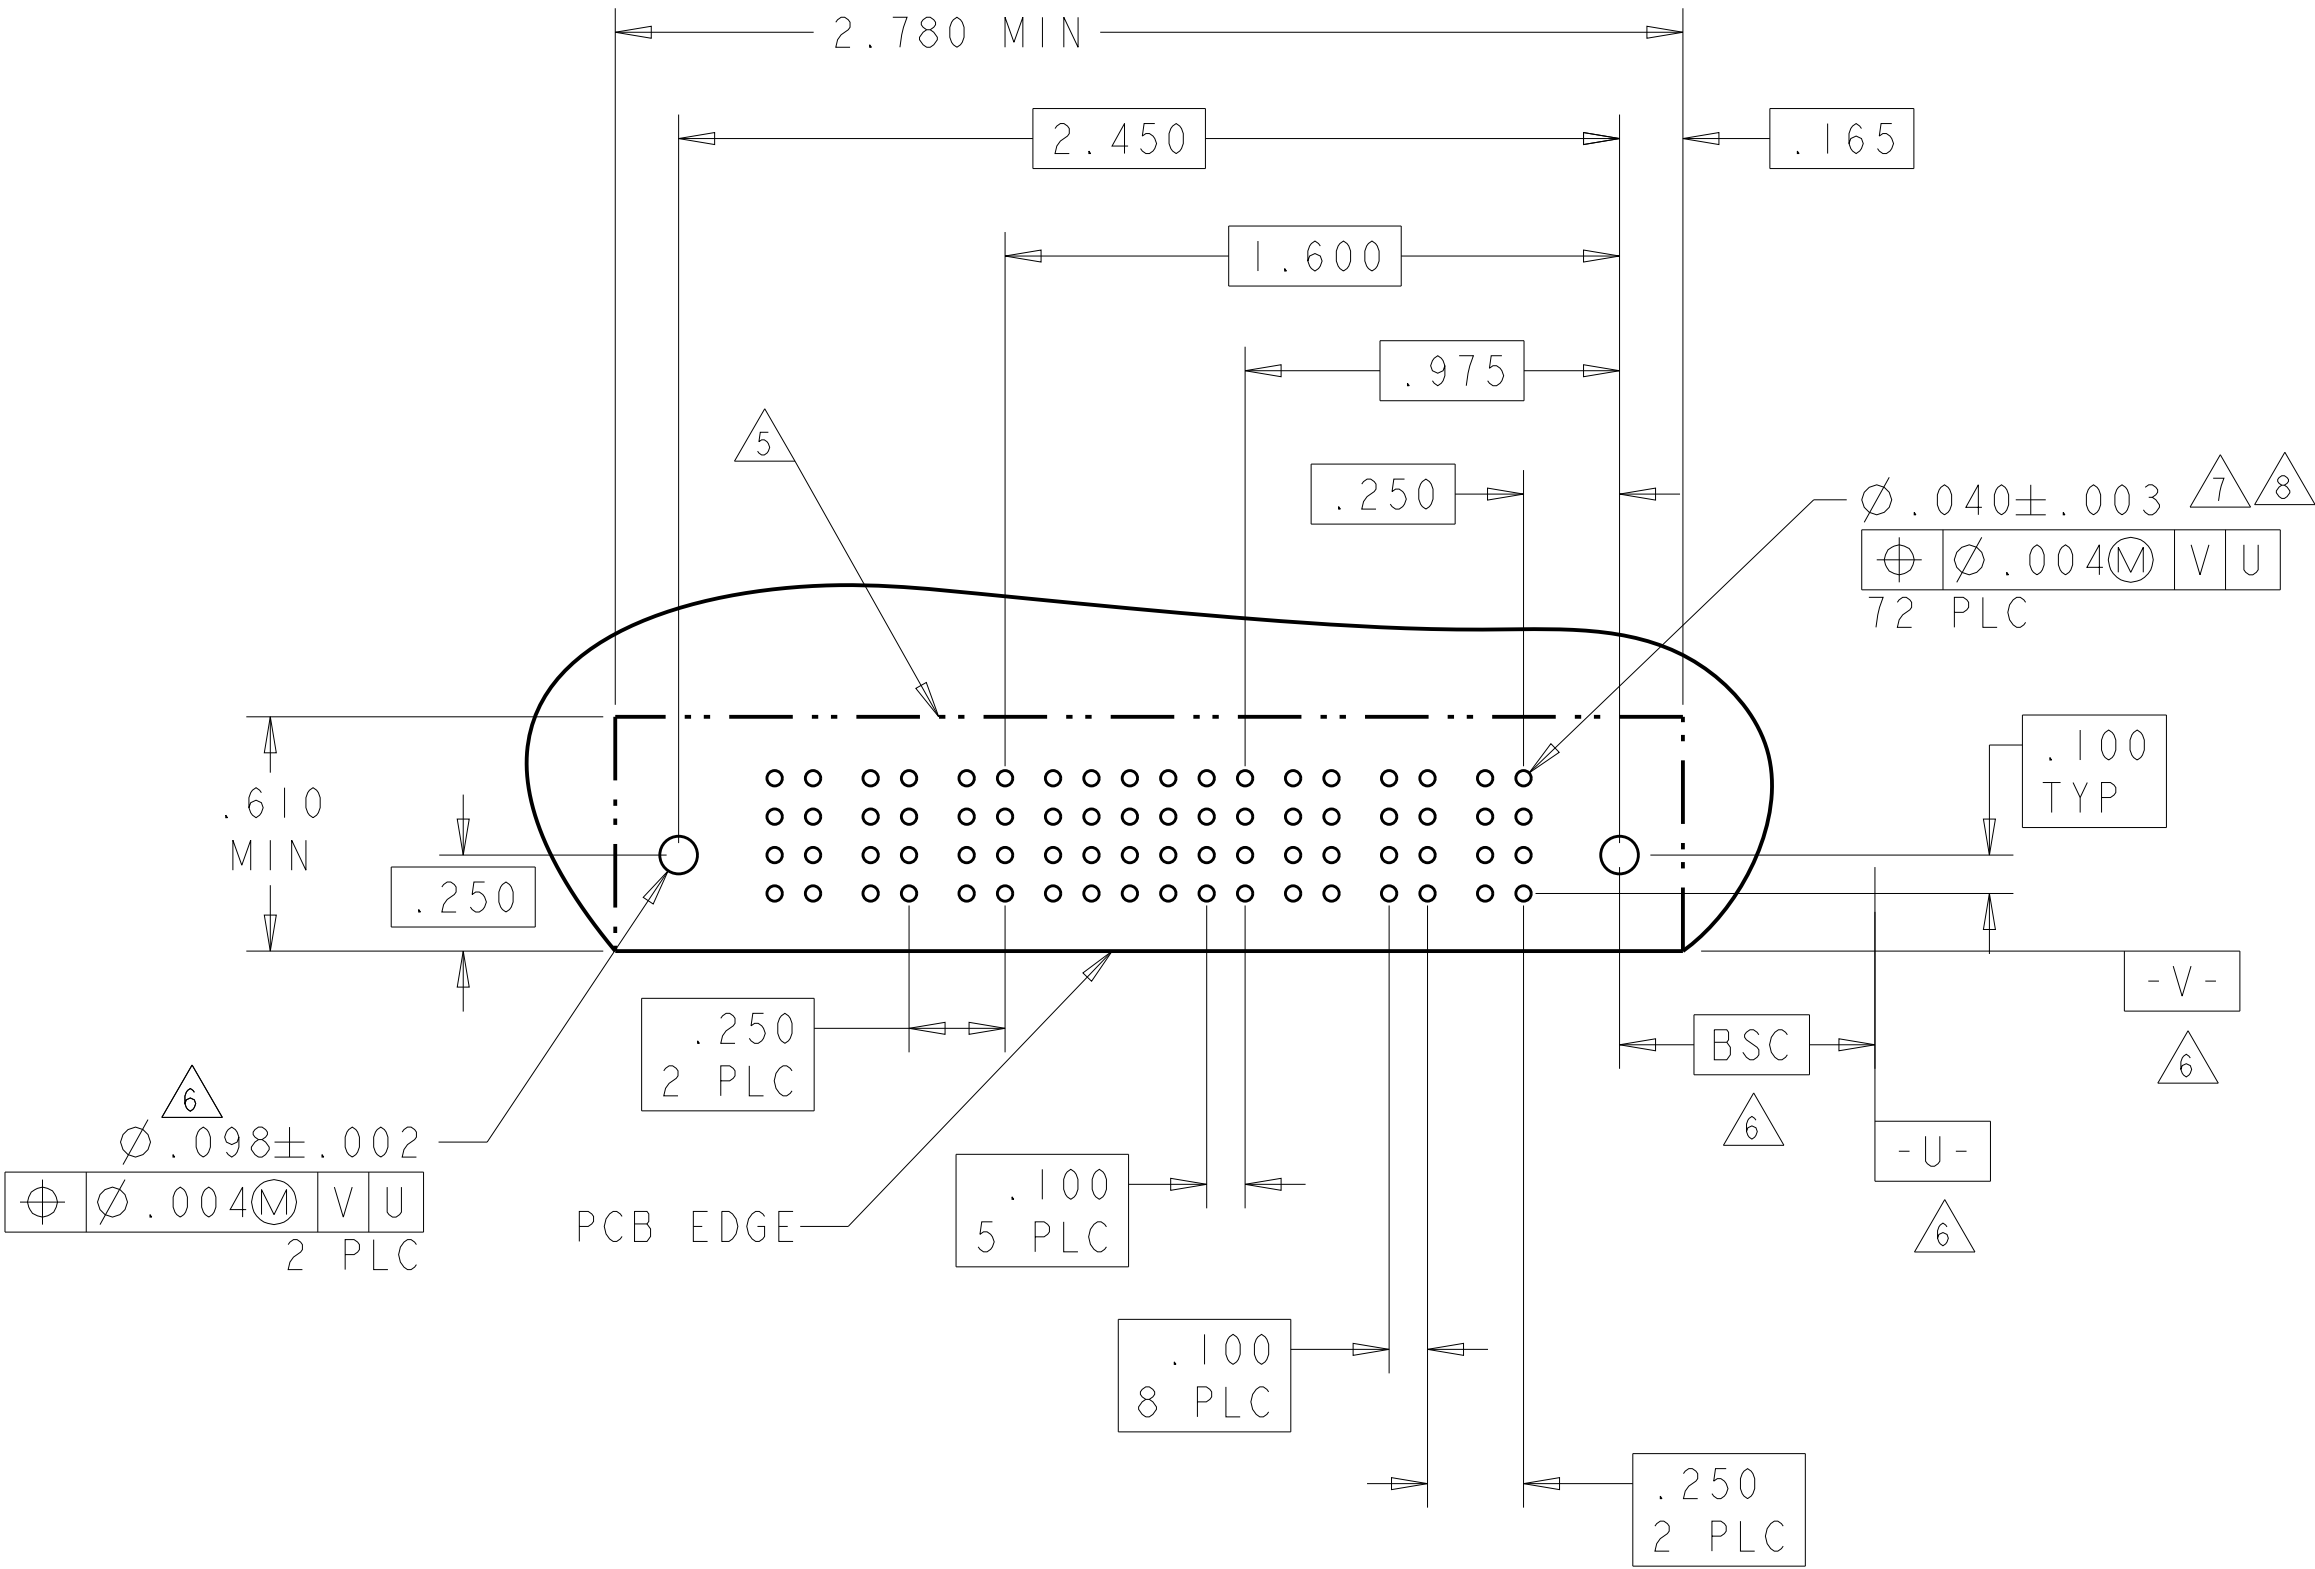
LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
			-	SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER				SIGNAL								POWER									
			P13	P12	P11	P10	8	7	6	5	4	3	2	1	P9	P8	P7	P6	P5	P4	P3	P2		P1
6450570-1	D C B A					DD	DD	DD	DD	DD	DD	DD	DD											
						CC	CC	CC	CC	CC	CC	CC	CC											
						BB	BB	BB	BB	BB	BB	BB	BB											
						AA	AA	AA	AA	AA	AA	AA	AA											
9P + 32S + 4P																								

NO CONTACT



PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
6450570-2	D C B A		RP	RS	RS	D	D	D	D	D	D	RS	RS	RP	
						C	C	C	C	C	C				
						B	B	B	B	B	B				
						A	A	A	A	A	A				
3P + 24S + 3P															



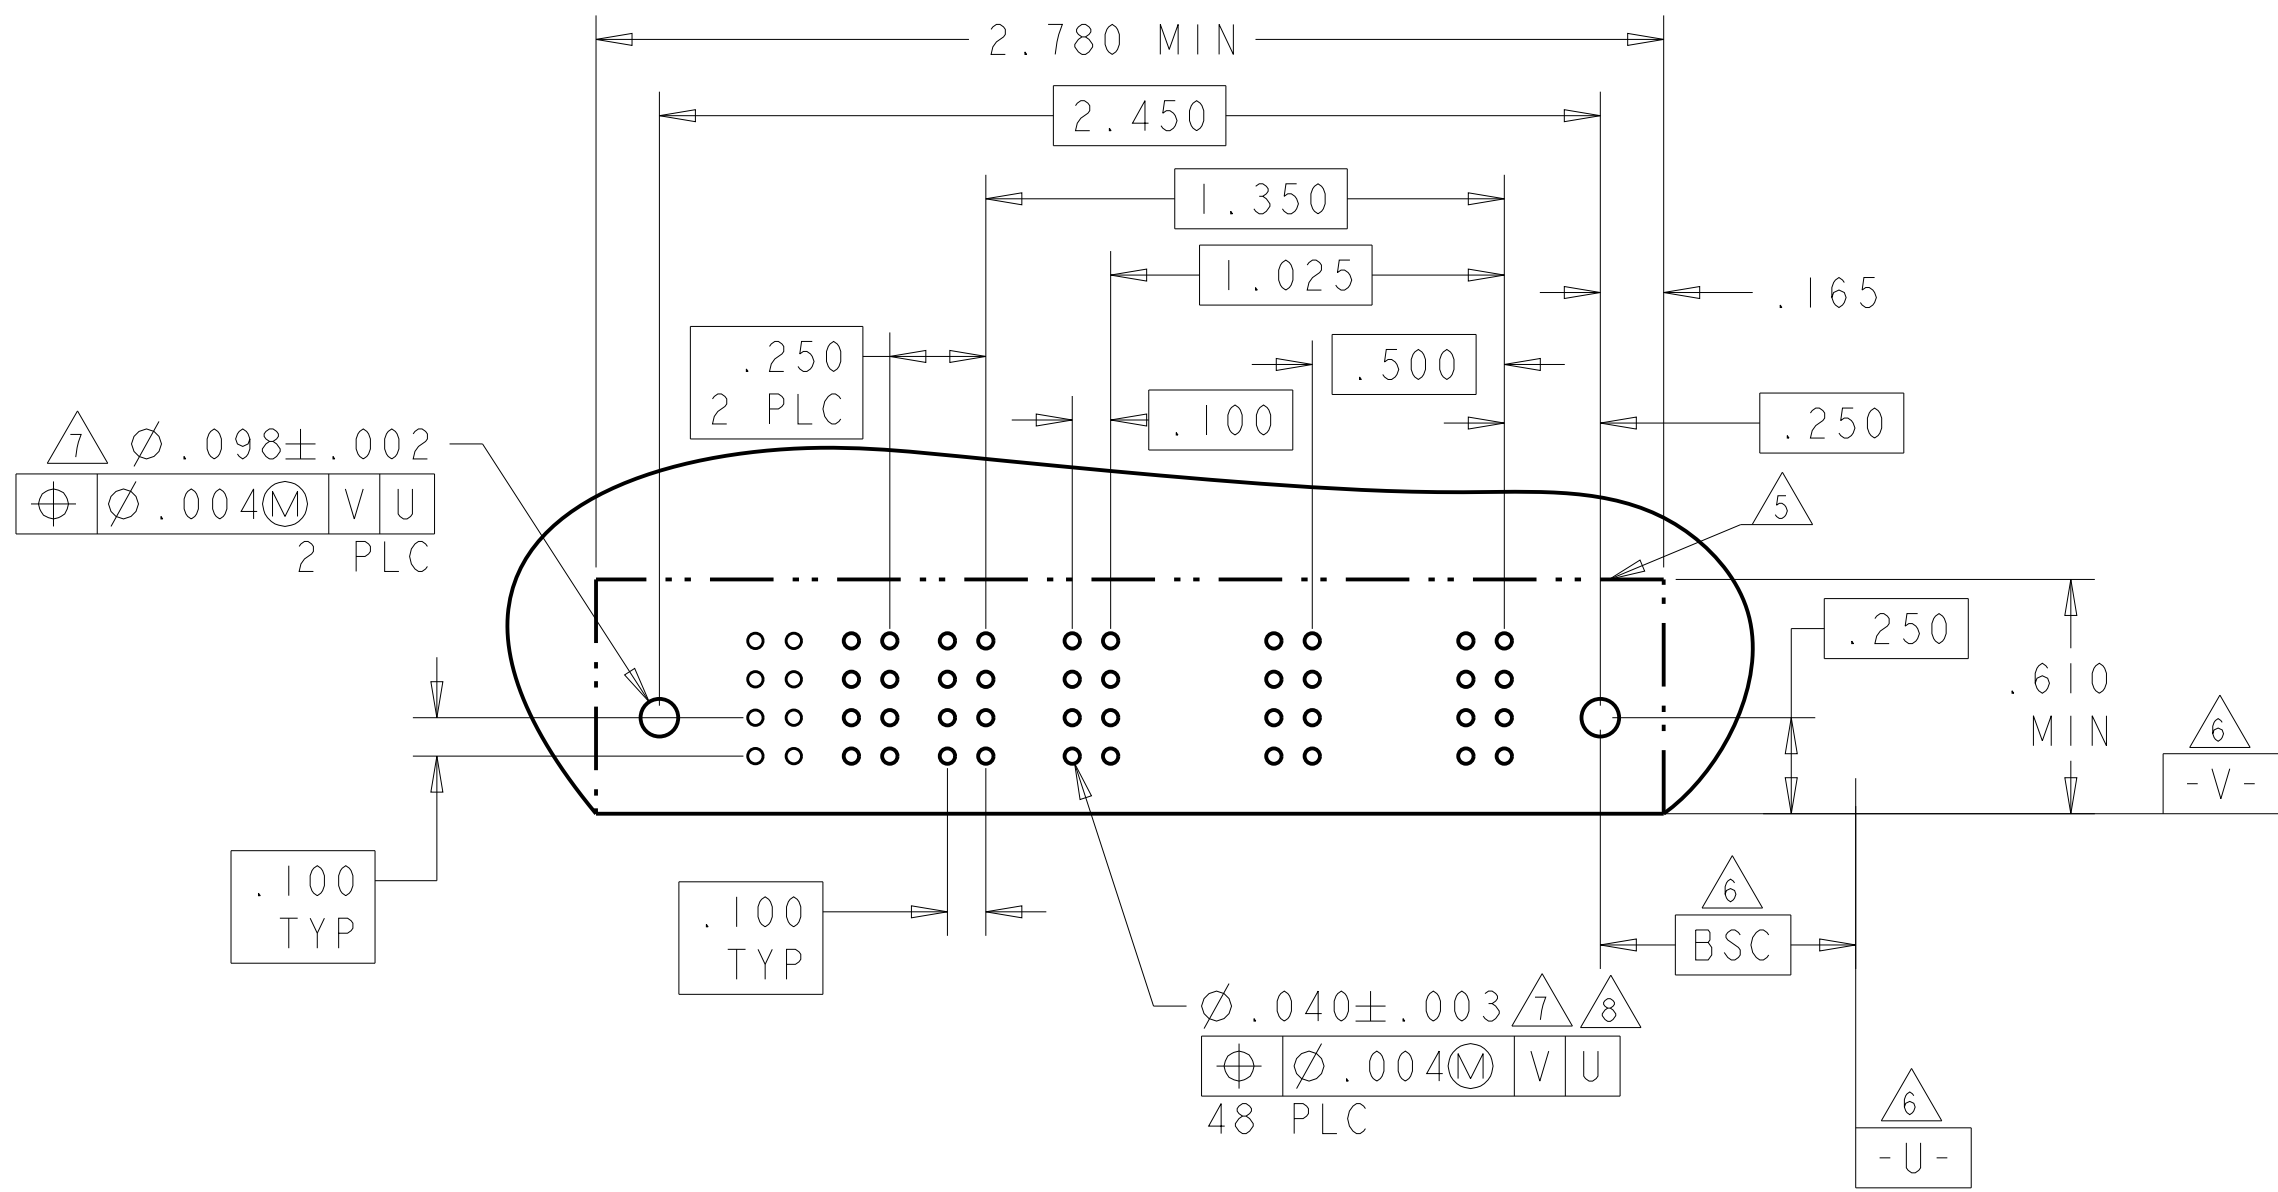
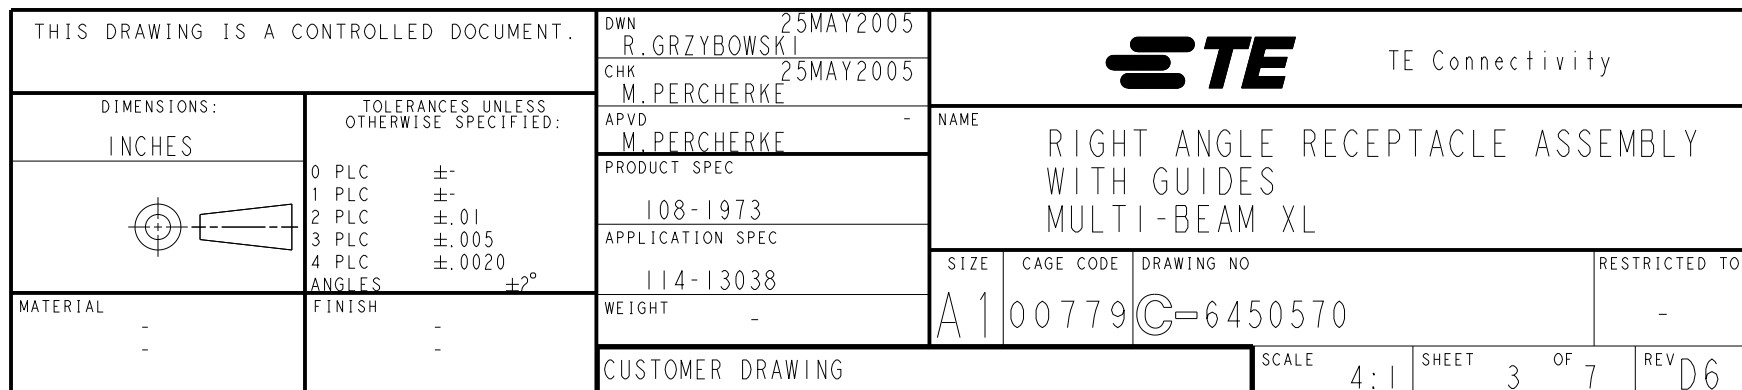
DD	.165-PRESS FIT	D
CC	.165-PRESS FIT	C
BB	.165-PRESS FIT	B
AA	.165-PRESS FIT	A

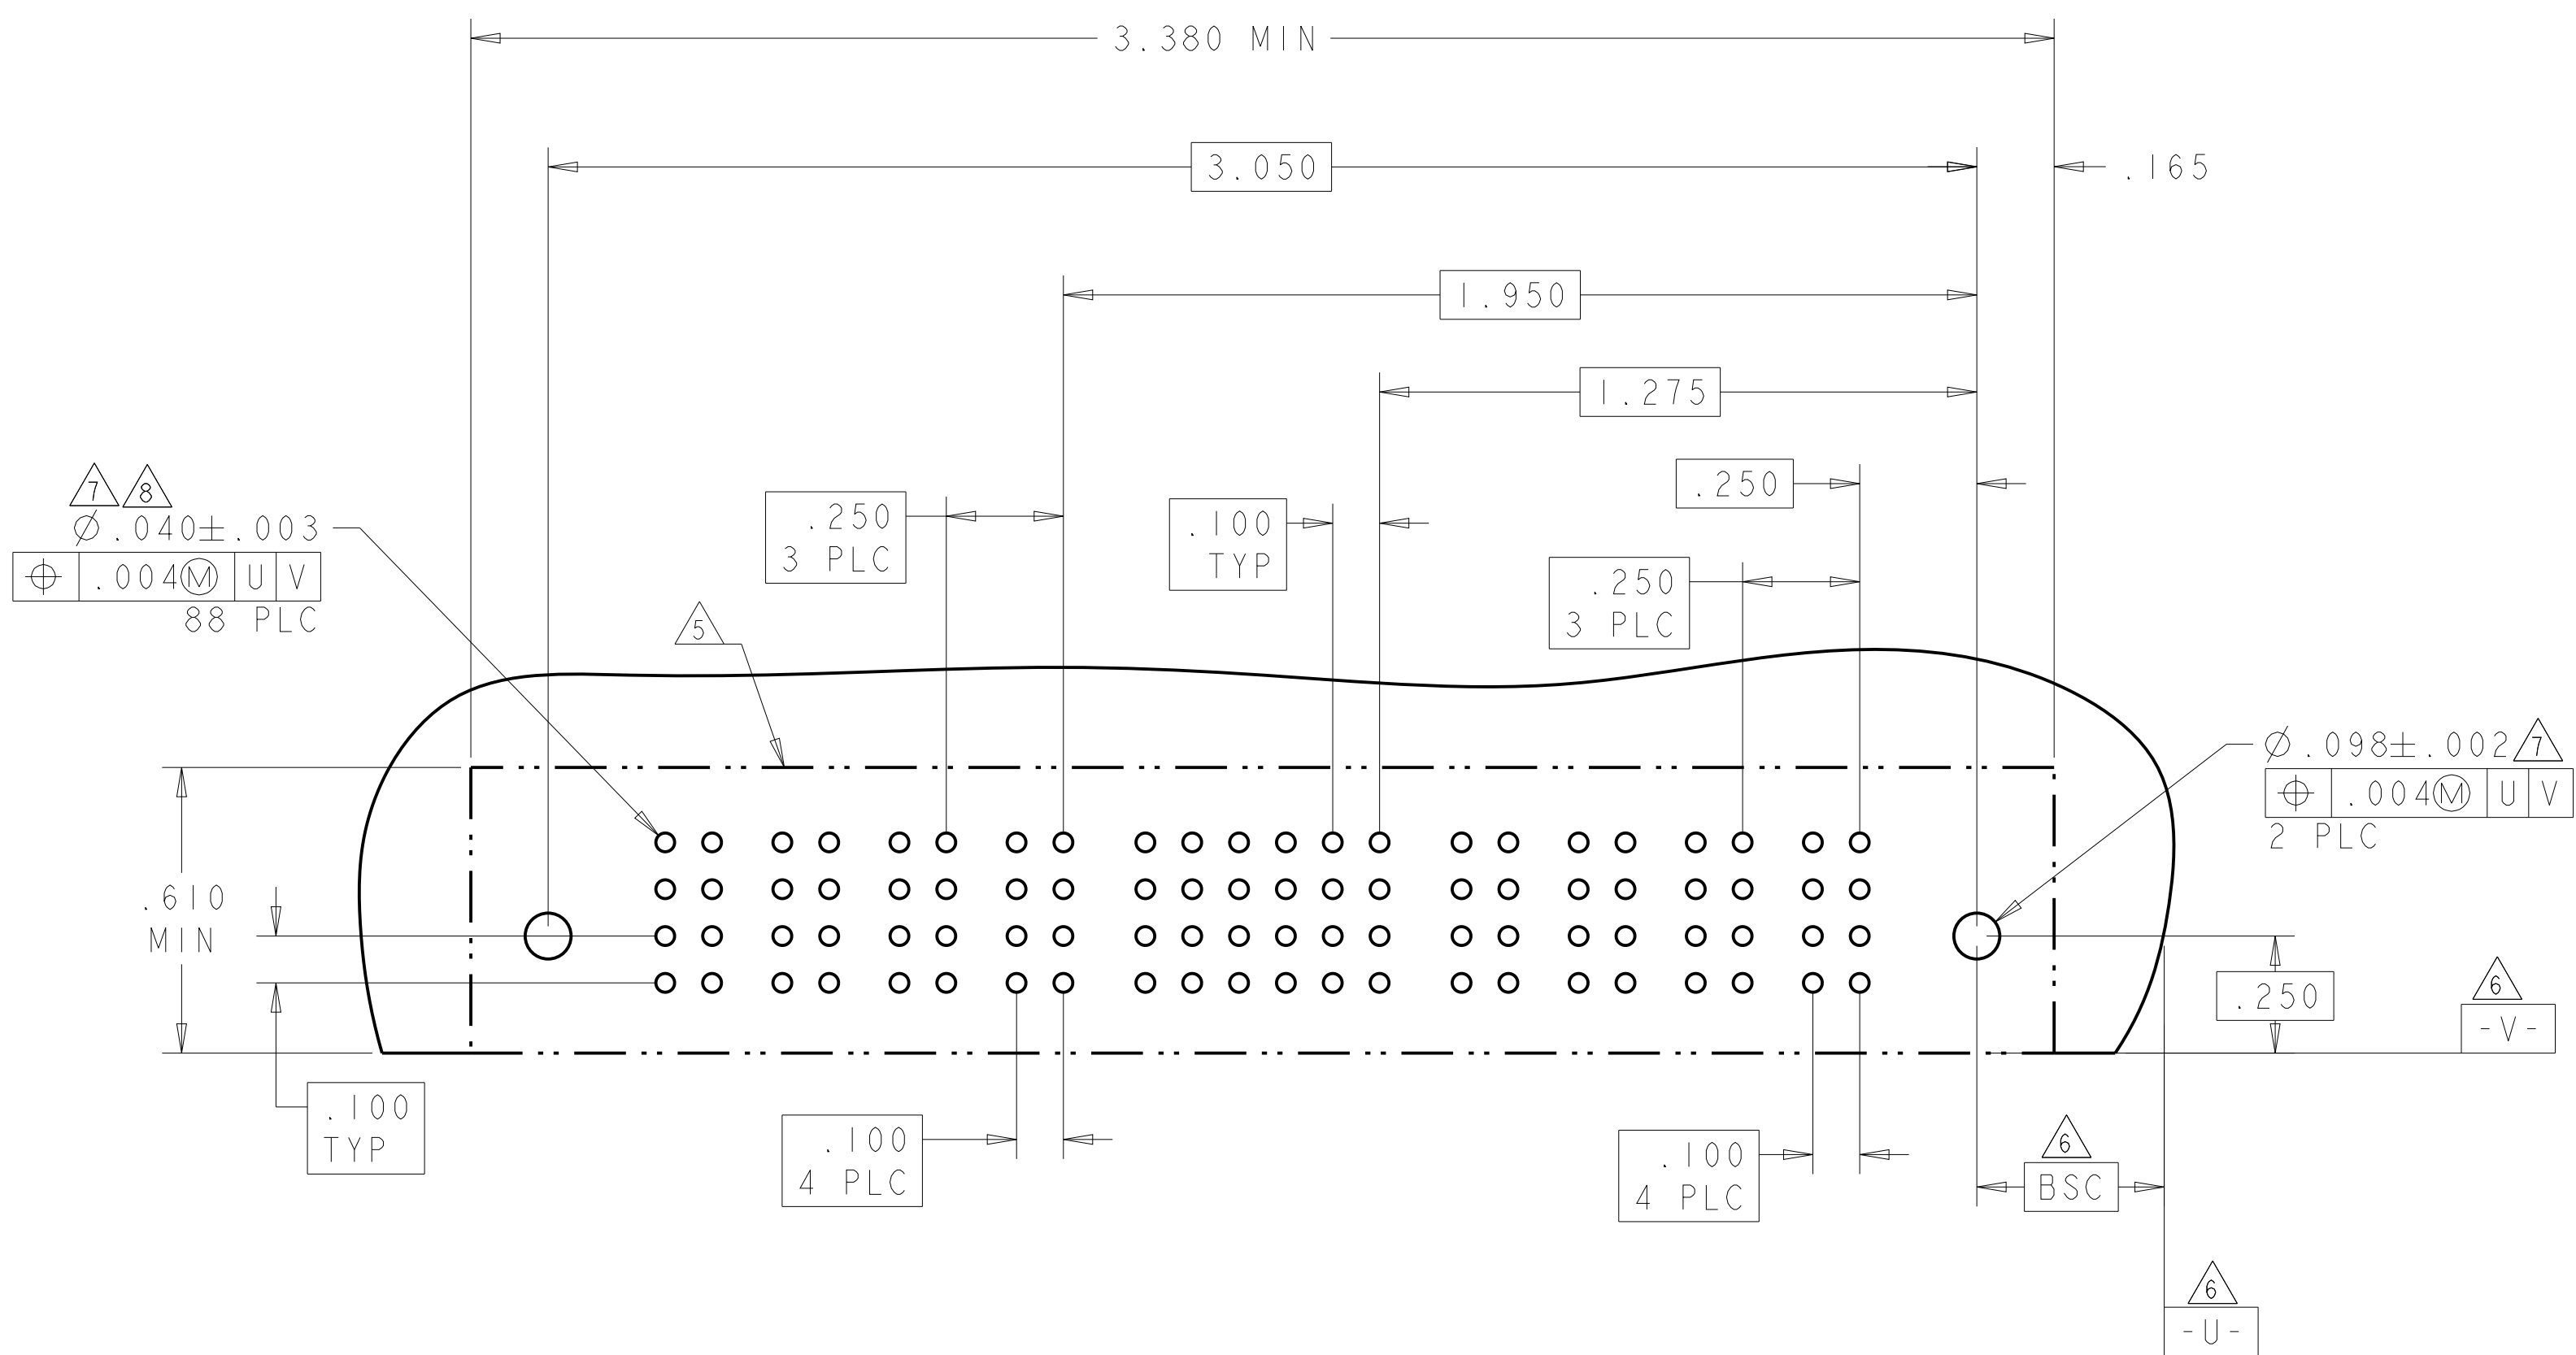
RL	.165 PRESS FIT	STD	D	.119-PRESS FIT	D
RK	.165 PRESS FIT	MFBL	C	.119-PRESS FIT	C
RS	.119 PRESS FIT	STD	B	.119-PRESS FIT	B
RP	.119 PRESS FIT	MFBL	A	.119-PRESS FIT	A
CODE	TAIL LENGTH	TYPE	CODE	TAIL LENGTH	ROW

POWER CONTACT			SIGNAL CONTACT		
---------------	--	--	----------------	--	--

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN R.GRZYBOWSKI 25MAY2005		CHK M.PERCHEKKE 25MAY2005		APVD M.PERCHEKKE		NAME	
DIMENSIONS: INCHES			TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		APPLICATION SPEC		RESTRICTED TO	
0 PLC ±.01			1 PLC ±.01		2 PLC ±.01		3 PLC ±.005		4 PLC ±.002	
ANGLES			FINISH		WEIGHT		CUSTOMER DRAWING		SCALE 1:1	
RK .165-PRESS FIT MFBL			RL .165-PRESS FIT STD		RP .119-PRESS FIT MFBL		RS .119-PRESS FIT STD		CODE TAIL LENGTH DESCRIPTION	
POWER CONTACT			SIGNAL CONTACT		CUSTOMER DRAWING		SCALE 1:1		SHEET 2 OF 7	
REV D6			REV D6		REV D6		REV D6		REV D6	

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1			
1-6450570-0	D C B A	HD	RS	RS	RP		D	D						RS		RS	
							C	C									
							B	B									
							A	A									
3P + 24S + 3P																	

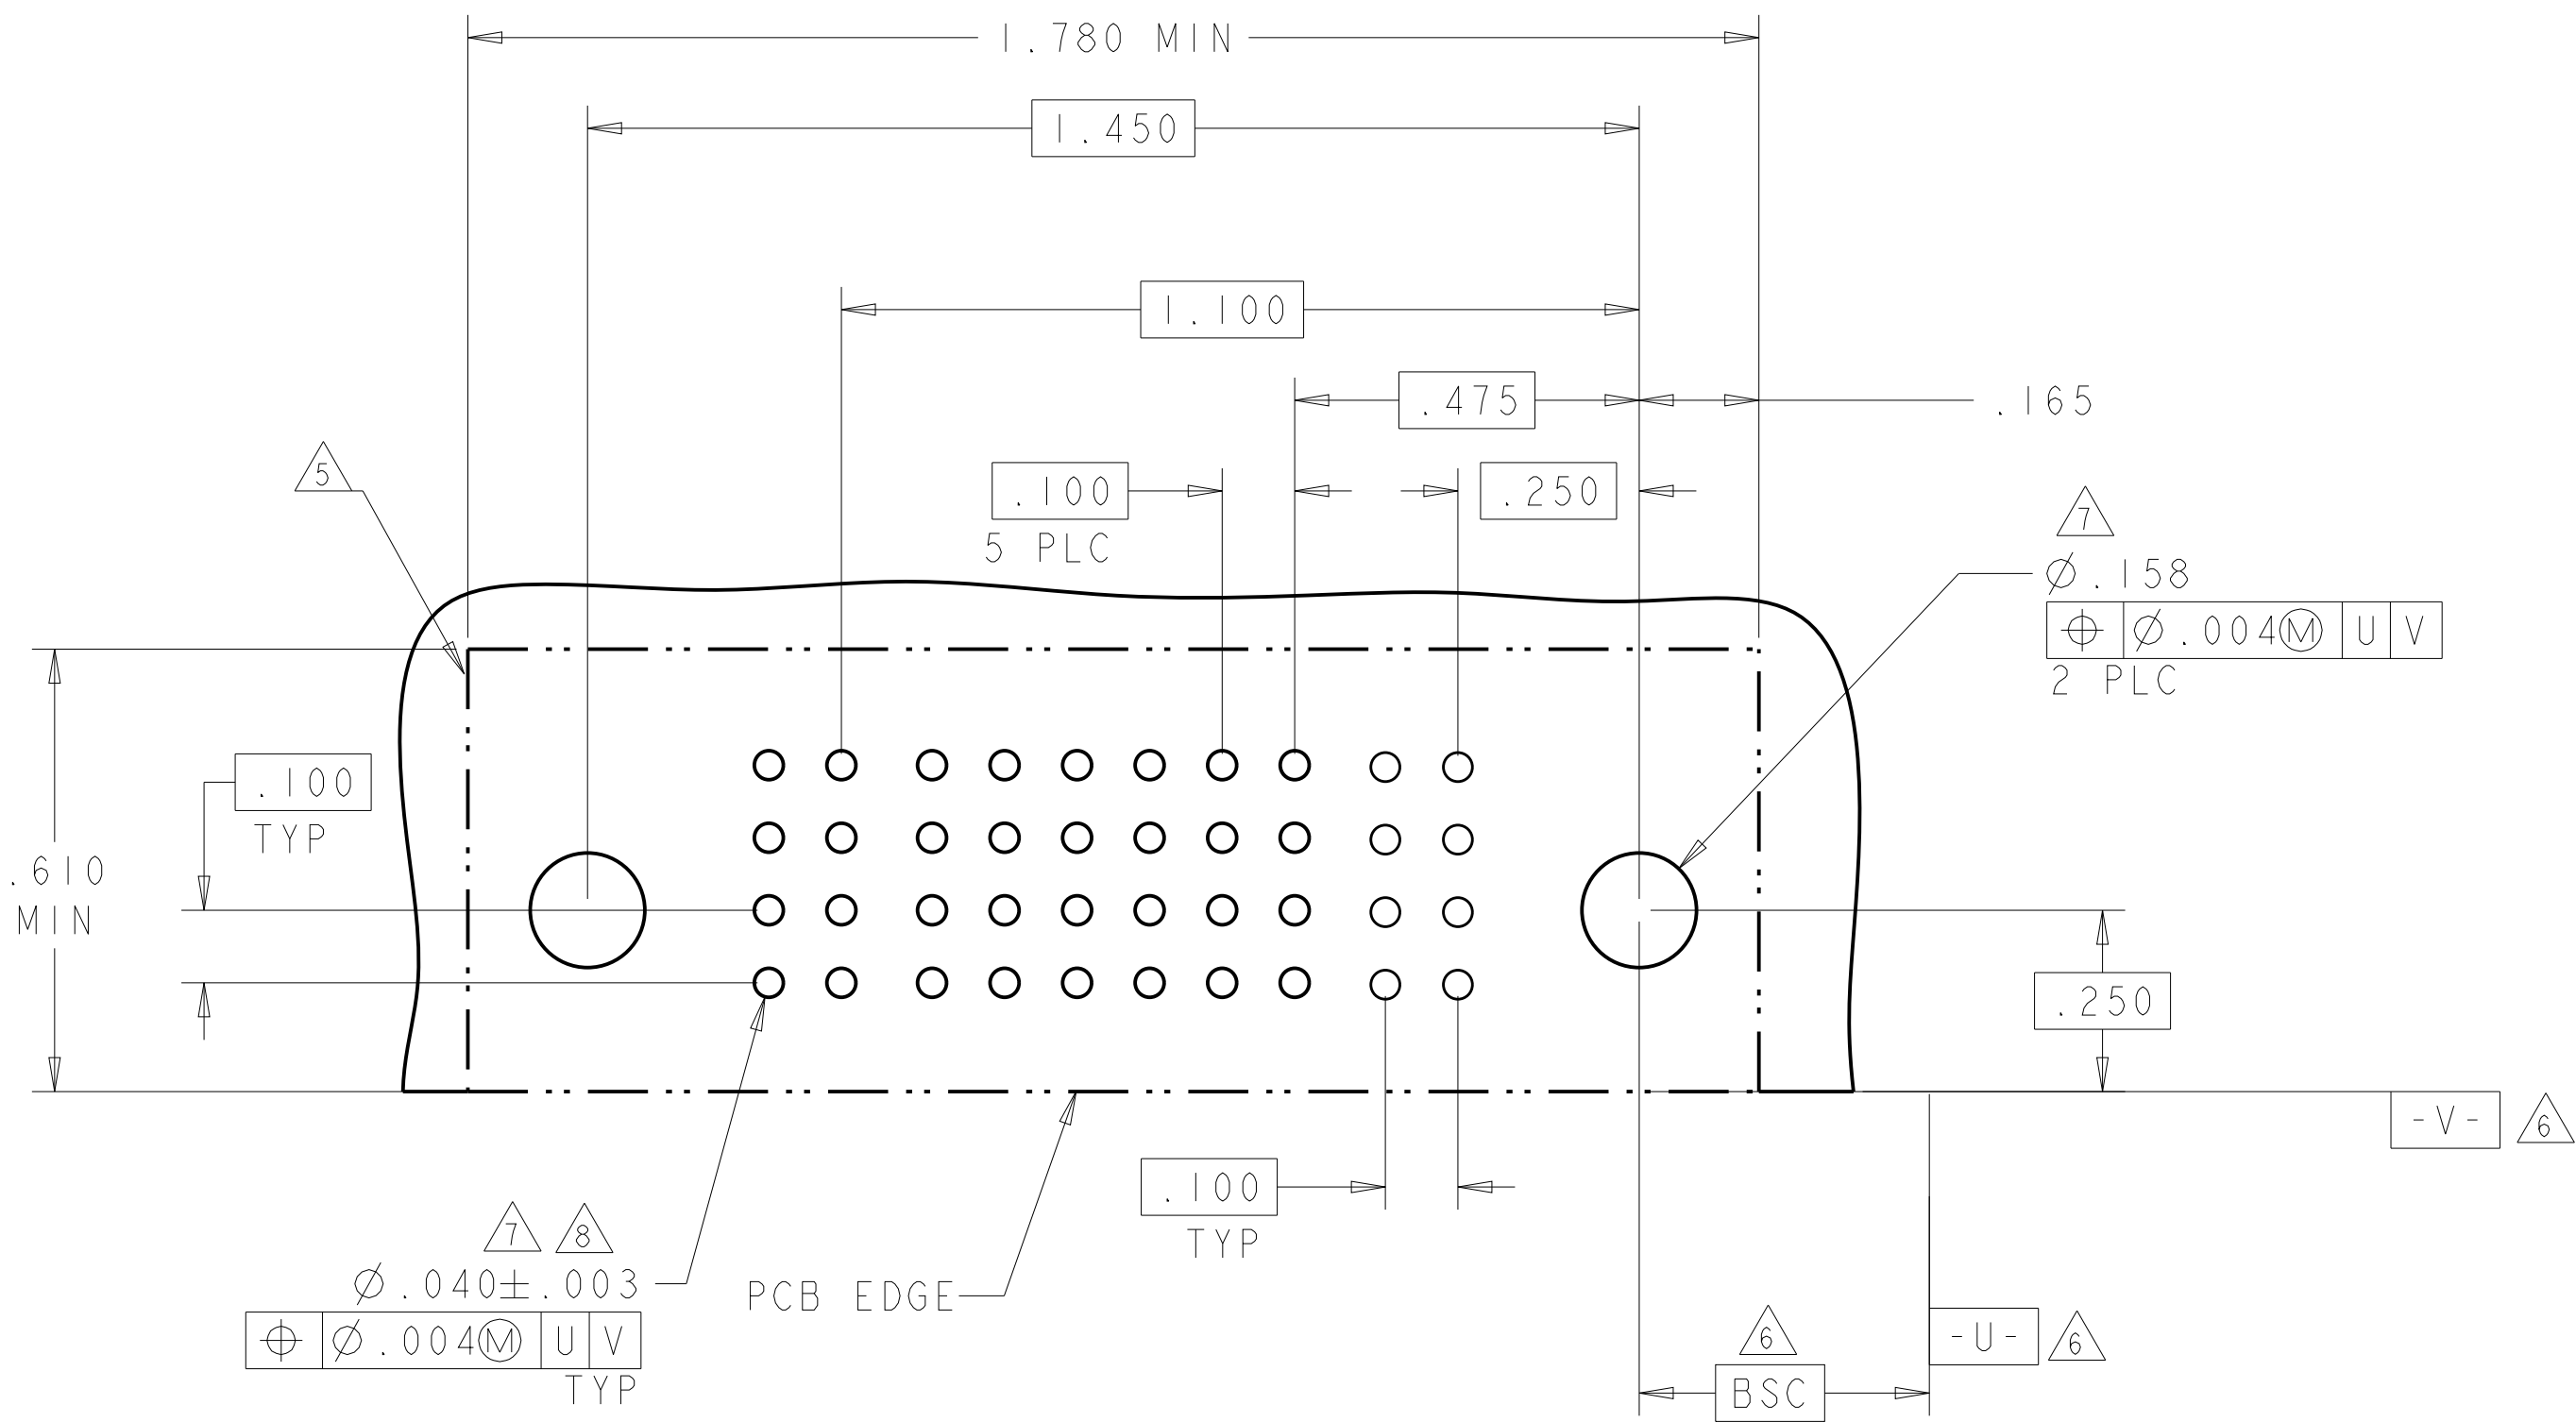
-NO CONTACT LOADED

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT		DWA 25MAY2005 R. GRZYBOWSKI		 TE Connectivity	
		CHP 25MAY2005 M. PERCHERKE			
DIMENSIONS: INCHES		TO DIMENSIONS, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLOC ±0.1 1 PLOC ±0.1 2 PLOC ±0.05 4 PLOC ±0.020 ANGLES ±0.2°		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC		SIZE	
		108-1973		CASE CODE	
		APPLICATION SPEC		DRAWING NO	
MATERIAL		WEIGHT		REVISION TO	
FINISH		114-13038		A1 00779	
		CUSTOMER DRAWING		C-6450570	
				SCALE 4:1 SHEET 4 OF 7 REV D6	

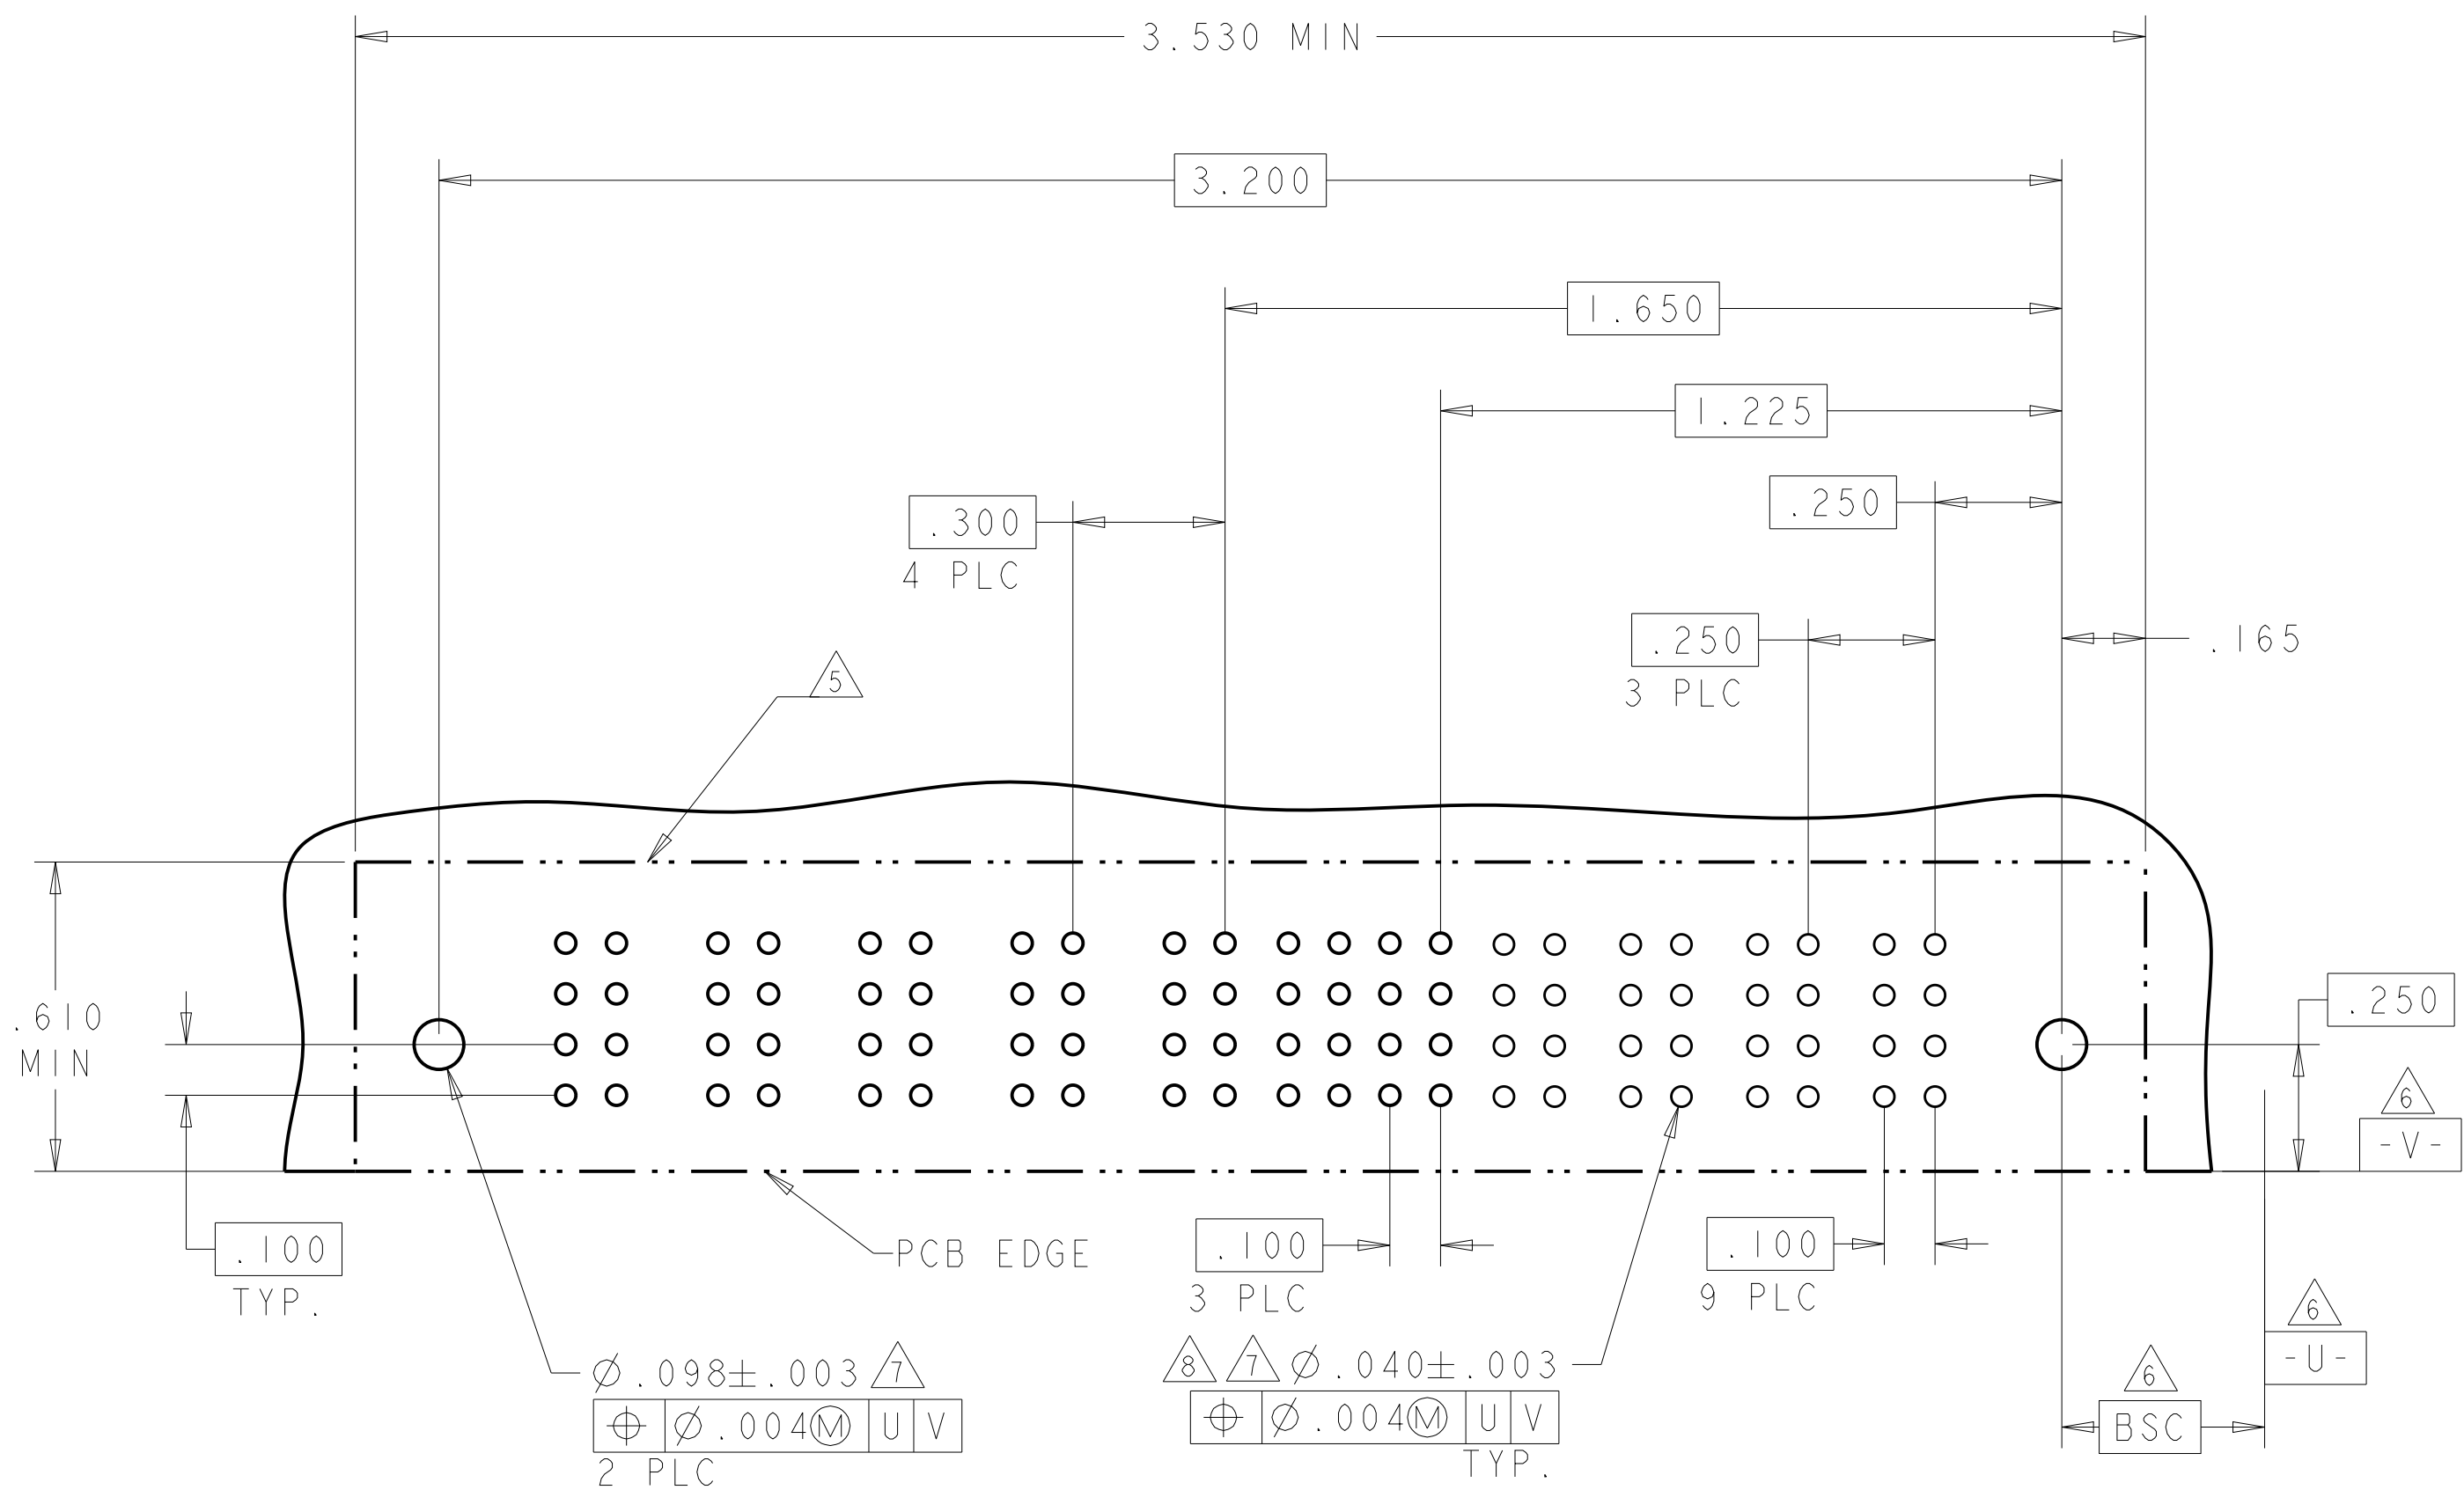
PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	P1		
1-6450570-5	D C B A		 RP								 RS	
				D	D	D	D	D	D			
				C	C	C	C	C	C			
				B	B	B	B	B	B			
				A	A	A	A	A	A			
1P + 24S + 1P												

DI



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: 25MAY2005 GRZYBOWSKI CHK: 25MAY2005 M. PERCHERKE		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: FINISH		NAME: RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		Ø PLC ± PLC ± PLC ±.01 PLC ±.005 PLC ±.0020 ANGLES ±°		PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT:	
MATERIAL: -		FINISH: -		SIZE: CAGE CODE: DRAWING NO: A100779C6450570 RESTRICTED TO: -	
		CUSTOMER DRAWING		SCALE: 4:1 SHEET: 5 of 7 REV: D6	

PART NUMBER	ROWS		POWER					SIGNAL				POWER																																																																								
			P9	P8	P7	P6	P5	4	3	2	1	P4	P3	P2	P1																																																																					
1-6450570-8	D C B A																																																																																			

4805 (3/11)

D6

4805 (3/11)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru