
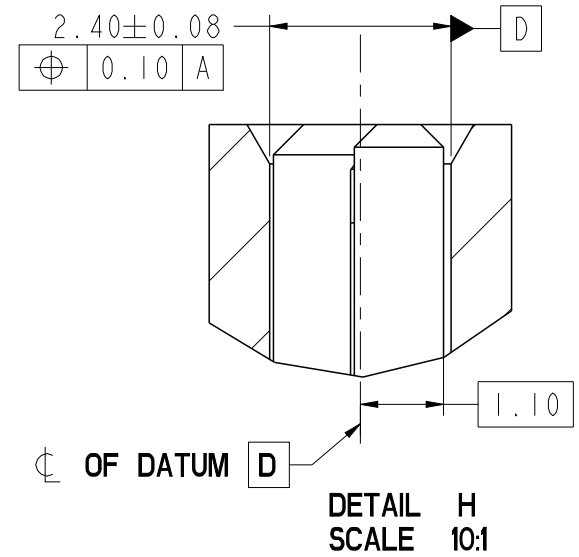
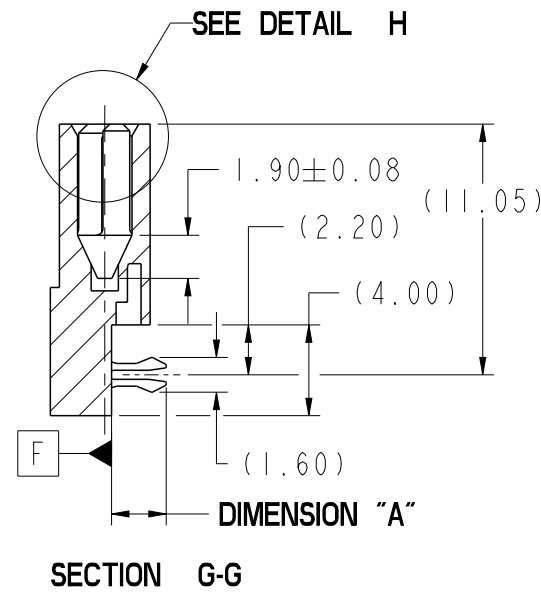
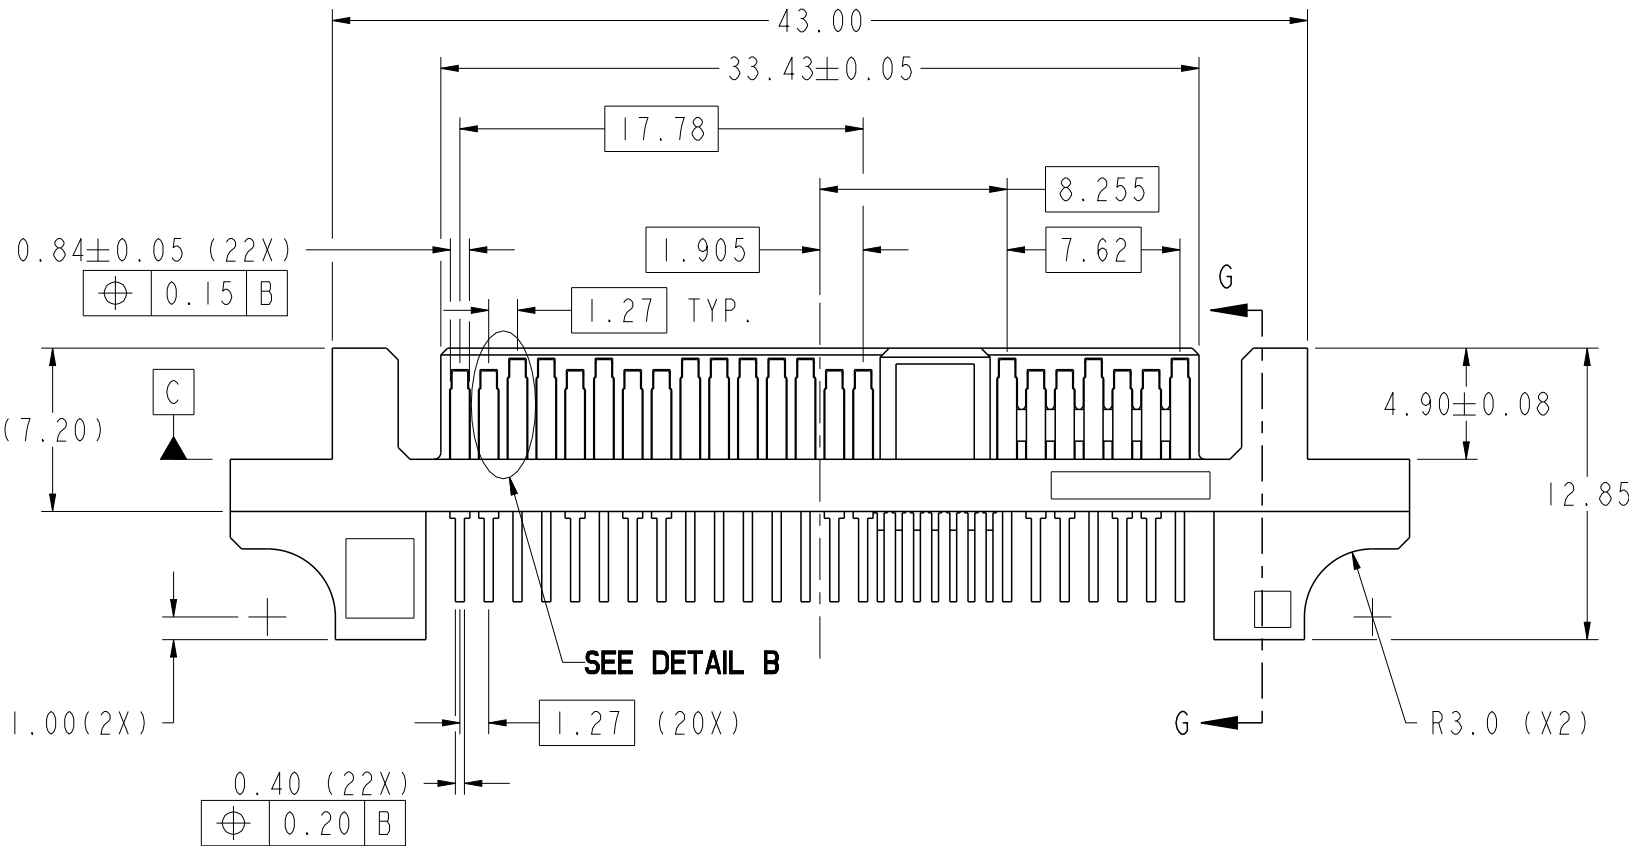
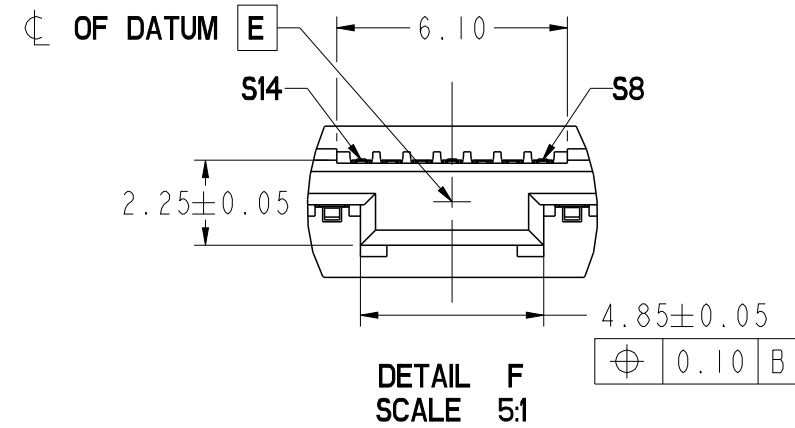
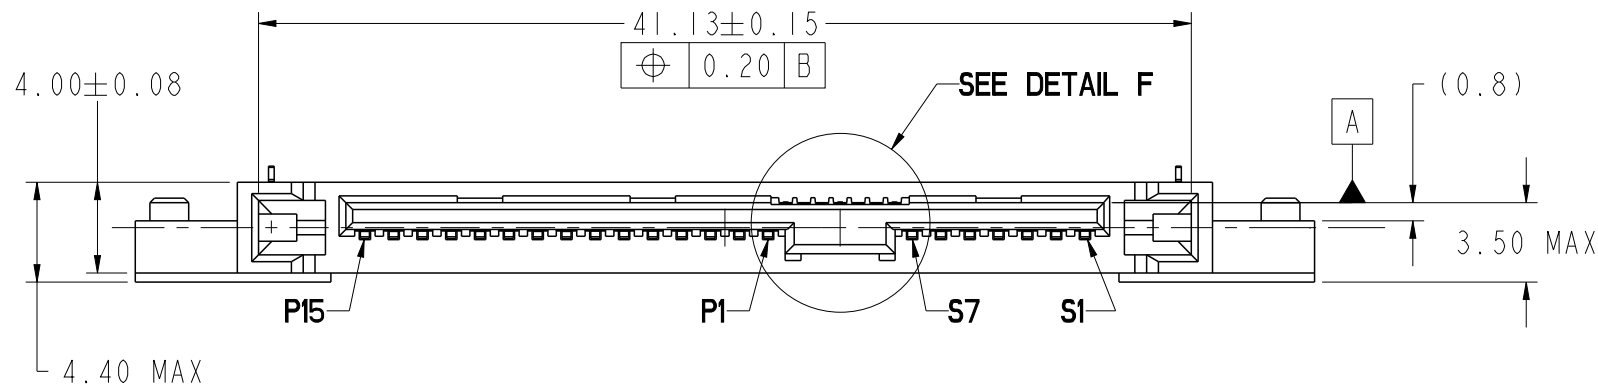


PRODUCT NUMBER
REFER TO TABLE



spec ref				dr	Suzie Nah	2015/01/26	projection 	MM 	size	A3	scale	3:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Siew-Leong Lim	2016/07/19			ecn no	ELX-M-24521-1		
				chr	Kok-Ong Tee	2016/07/20						
				appr	Koon-Poh Tay	2016/07/26						
surface  ASME Y14.5	linear	0.X	±0.25	Amphenol FCi	title 12G SAS PLUG R/A SMT TYPE ASSY				dwg no	10129900		rev B
		0.XX	±0.15									
		0.XXX	±0.050									
	angular	0°	±2°		cat. no.			Product - Customer Drw			sheet 1 of 4	


A

B


C

D





PRODUCT NUMBER	DIMENSION "A"	PCB THICKNESS	WITH ADHESIVE TAPE	WITH PICK-UP CAP	PACKAGING
10129900-001LF	2.40±0.15	1.60	NO		TRAY
10129900-002LF	2.00±0.15	1.20			
10129900-001TRLF	2.40±0.15	1.60			TAPE & REEL
△ B 10129900-001C-TRLF	2.40±0.15	1.60	N/A	10061860-003	TAPE & REEL
△ B 10129900-003C-TRLF	2.40±0.15	1.60	10113739-001	10061860-003	TAPE & REEL
△ B 10129900-004C-TRLF	2.00±0.15	1.20			

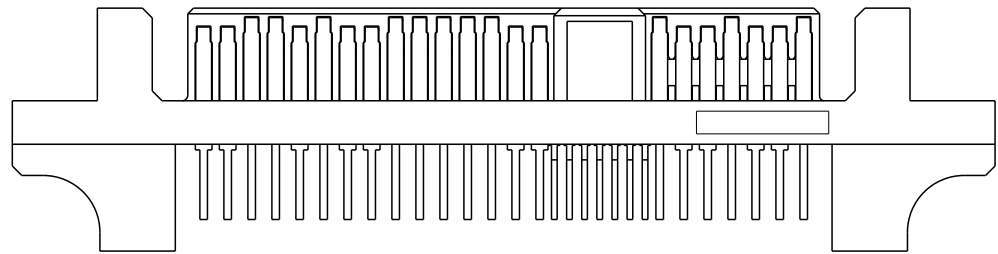


10129900-001/002

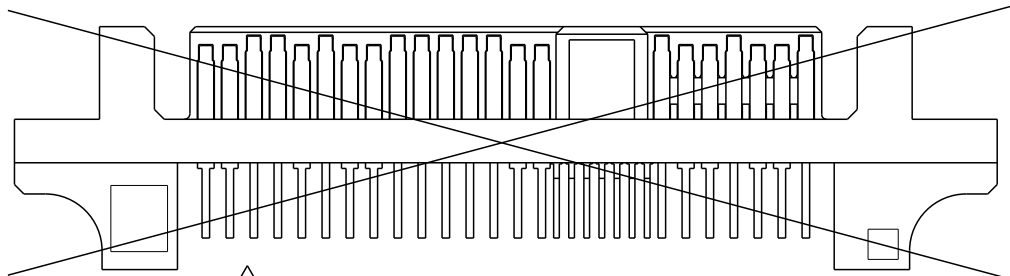

10129900-003/004

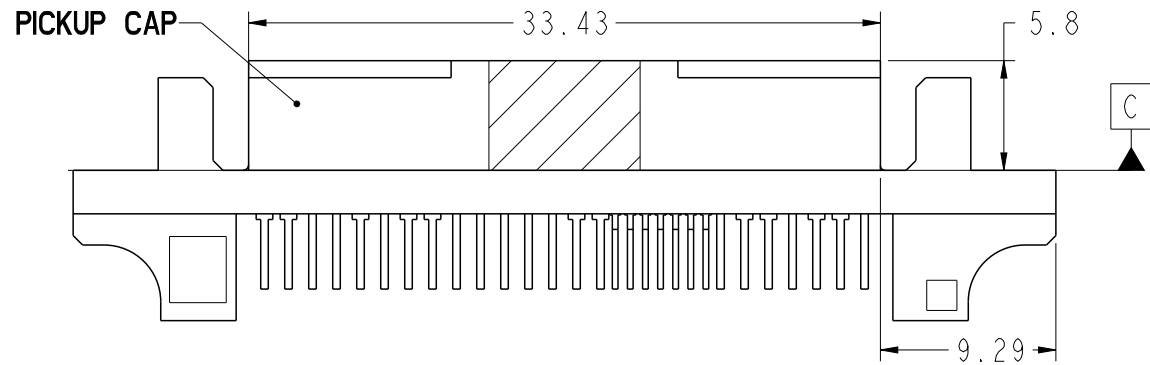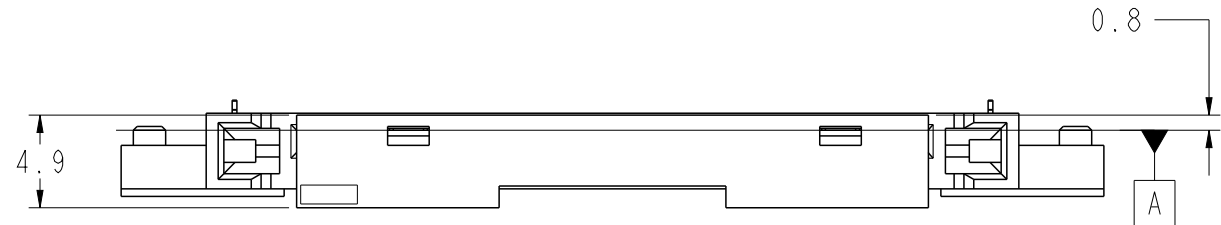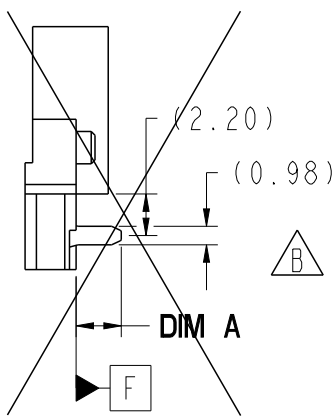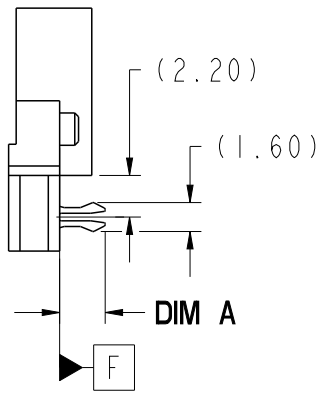

PLACEMENT OF PICKUP CAP


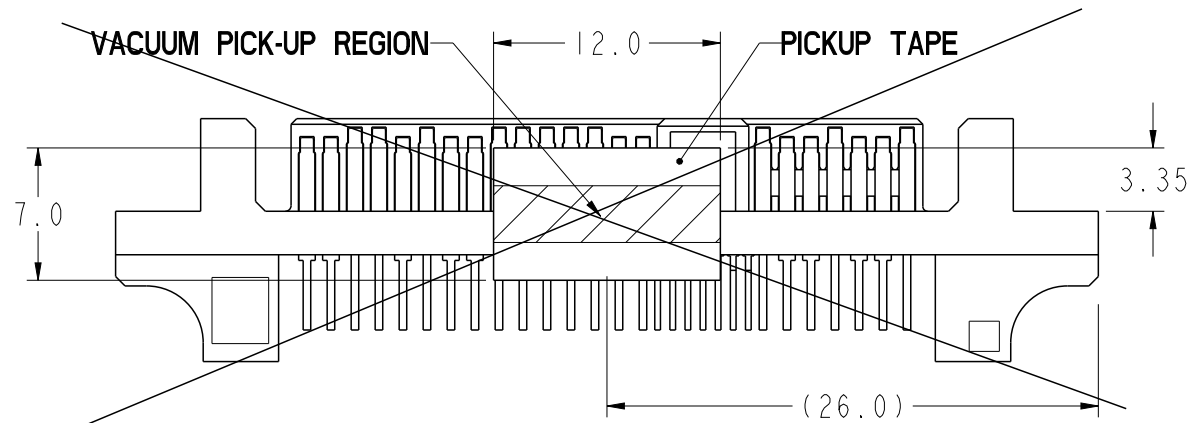


PLACEMENT OF PICKUP TAPE


spec ref				dr		Suzie Nah	2015/01/26	projection 	MM 	size	A3	scale	3:1		
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		Siew-Leong Lim	2016/07/19			ecn no	ELX-M-24521-1				
				chr		Kok-Ong Tee	2016/07/20								
				appr		Koon-Poh Tay	2016/07/26				product family			rel level	Released
surface  ASME Y14.5	linear	0.X	±0.25	Amphenol FCi	title				dwg no	10129900		rev	B		
		0.XX	±0.15												
		0.XXX	±0.050		TYPE ASSY										
	angular	0°	±2°							cat. no.				Product - Customer Drw	

- NOTES:
1. MATERIAL:
HOUSING: LCP UL94V-0
CONTACT & HOLD DOWN: COPPER ALLOY
2. FINISH:
CONTACT: 1.27um Min. NICKEL UNDERPLATE OVERALL,
1.91um Min. 100% MATTE TIN(LEAD-FREE) ON SOLDER TAIL,
0.76um Min. GOLD ON CONTACT AREA
HOLD DOWN: 2.54um Min. 100% MATTE TIN(LEAD-FREE) OVER
1.27um Min. NICKEL UNDERPLATE OVERALL
3. PRODUCT SPEC: GS-12-282
4. PACKAGING SPEC: GS-14-952(TRAY); GS-14-1038(TAPE & REEL)
5. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN
7. HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN
8. A SYMBOL  WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION


RECOMMENDED PAD LAYOUT FOR 10129900-001/-002
SCALE 5:2

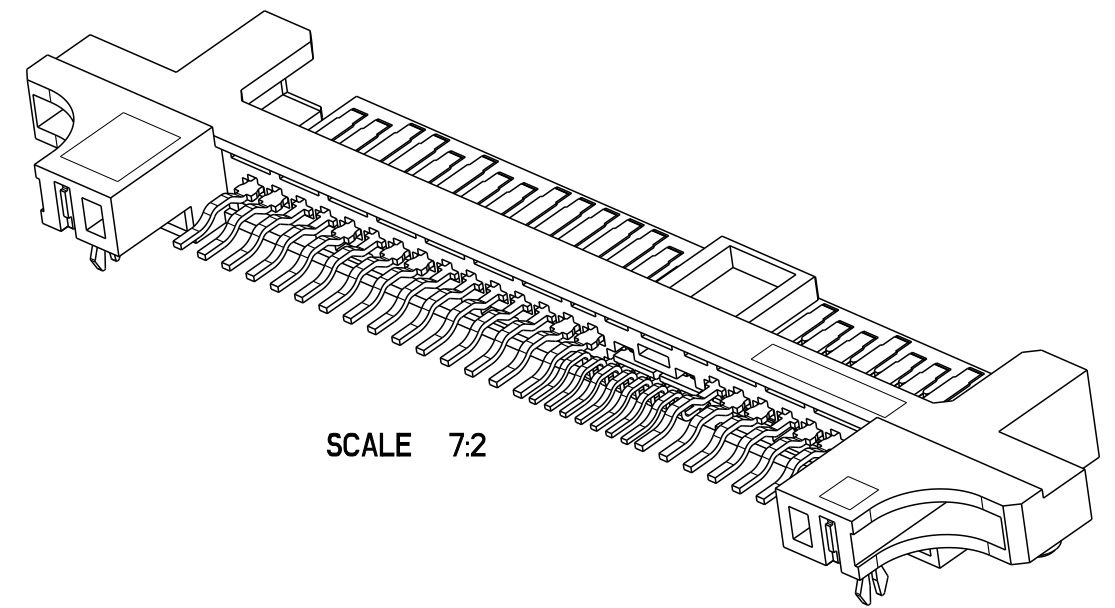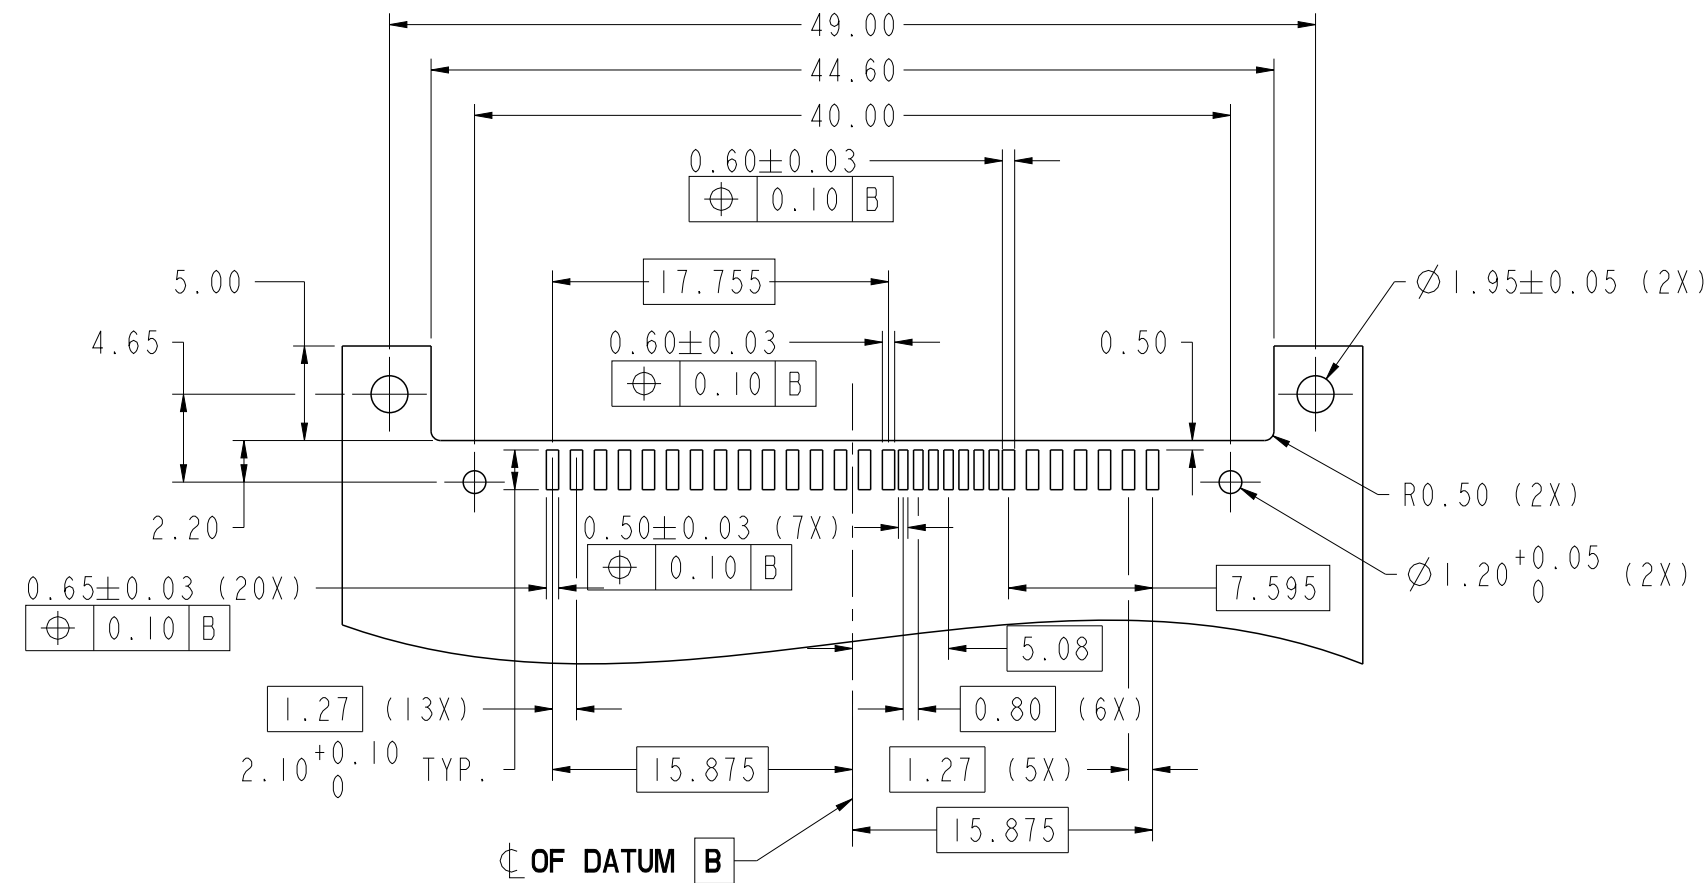

SCALE 7:2

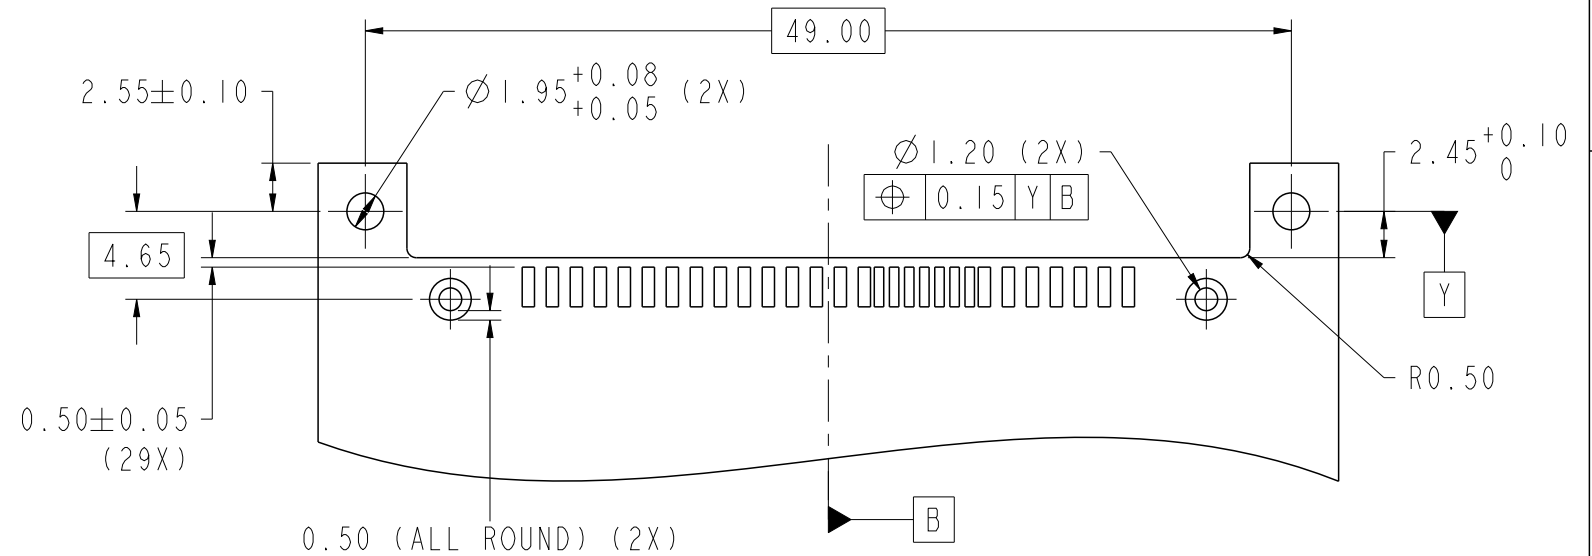

RECOMMENDED PAD LAYOUT FOR 10129900-003/-004
(GENERAL TOLERANCE: ± 0.08)
SCALE 5:2

spec ref				dr	Suzie Nah	2015/01/26	projection 	MM 	size	A3	scale	3:1	
tolerance std				eng	Siew-Leong Lim	2016/07/19			ecn no				ELX-M-24521-1
ASME Y14.5				chr	Kok-Ong Tee	2016/07/20			rel level				Released
				appr	Koon-Poh Tay	2016/07/26			product family				
surface 	linear	0.X	±0.25	Amphenol FCi	title 12G SAS PLUG R/A SMT TYPE ASSY				dwg no	10129900		rev B	
		0.XX	±0.15										
		0.XXX	±0.050										
ASME Y14.5	angular	0°	±2°		cat. no.			Product - Customer Drw			sheet 4 of 4		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru