

Features

- Voltage Operation as low as 1.6 V
- Insertion Loss: 0.20 dB @ 1 GHz
- Lead-Free 1 mm 6-Lead PDFN Package
- RoHS* Compliant and 260°C Reflow Compatible


Description

M/A-COM's MASW-009444 is a GaAs PHEMT MMIC single pole two throw (SP2T) switch in a miniature 1x1mm 6-lead PDFN package. The MASW-009444 is ideally suited for applications where low control voltage, low insertion loss, moderate isolation, and small size are required.

Typical applications are for filter and antenna switching in handset systems that connect separate receive functions to a common antenna, as well as other related handset and general purpose applications. This part can be used in all systems operating up to 6 GHz requiring high power at low control voltage.

The MASW-009444 is fabricated using a 0.5 micron gate length GaAs PHEMT process. The process features full passivation for performance and reliability.

Functional Diagram

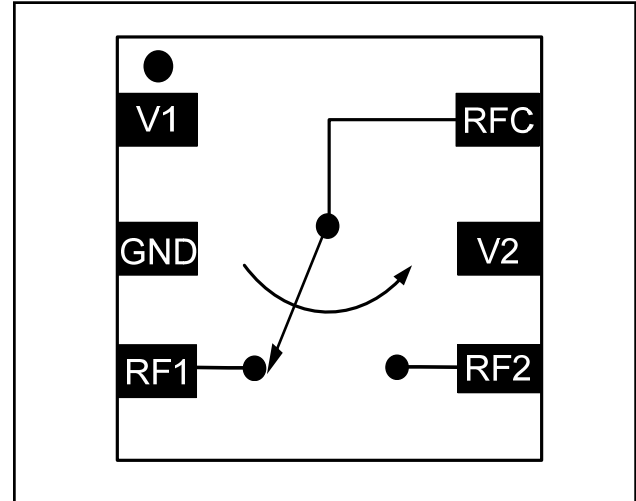

Pin Configuration

Pin No.	Function	Description
1	V1	Control 1
2	GND	Ground
3	RF1	RF Port 1
4	RF2	RF Port 2
5	V2	Control 2
6	RFC	RF Common

Ordering Information ^{1,2}

Part Number	Package
MASW-009444-TR3000	3000 piece reel
MASW-009444-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

Absolute Maximum Ratings ^{3,4}

Parameter	Absolute Maximum
Max Input Power (0.5 - 3 GHz, 2.7V Control)	+27 dBm
Operating Voltage	+8.5 volts
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. M/A-COM does not recommend sustained operation near these survivability limits.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Electrical Specifications:⁵ $T_A = 25^\circ\text{C}$, $V_C = 1.8\text{ V}$, $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	DC - 1 GHz	dB	—	0.2	.45
	1 - 2 GHz		—	0.3	—
	2 - 3 GHz		—	0.4	—
Isolation	DC - 1 GHz	dB	22	28	—
	1 - 2 GHz		—	23	—
	2 - 3 GHz		—	19	—
VSWR	DC - 2.5 GHz	dB	—	<1.3	—
	2.5 - 3 GHz		—	<1.3	—
IP3	Two Tone +10 dBm, 5 MHz Spacing, >50 MHz $P_{IN} = 0\text{ dBm}$ $V_C = 0/2.5\text{ V}$	dBm	—	47	—
P1dB	$V_C = 1.8\text{ V}$	dBm	—	15	—
	$V_C = 2.7\text{ V}$		—	24	—
Trise, Tfall	10% to 90% RF, 90% to 10% RF	ns	—	10	—
Ton, Toff	50% control to 90% RF, and 50% control to 10% RF	ns	—	15	—
Transients	In Band	mV	—	30	—
Control Current	$ V_C = 1.8\text{ V}$	μA	—	5	10

5. Insertion Loss can be optimized by varying the DC Blocking Capacitor value, i.e. 1000 pF for 100 - 500 MHz, 39 pF for 0.5 - 3.0 GHz

Truth Table ⁶

V1	V2	RFC - RF1	RFC - RF2
0 V	+1.8 to 5 V	On	Off
+1.8 to 5 V	0 V	Off	On

6. External DC blocking capacitors are required on all RF ports

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Typical Performance Curves


Insertion Loss

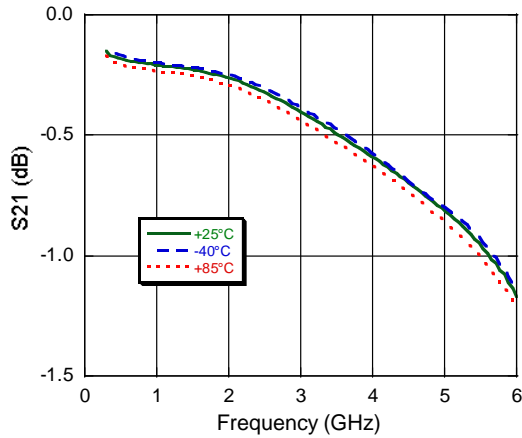


Isolation

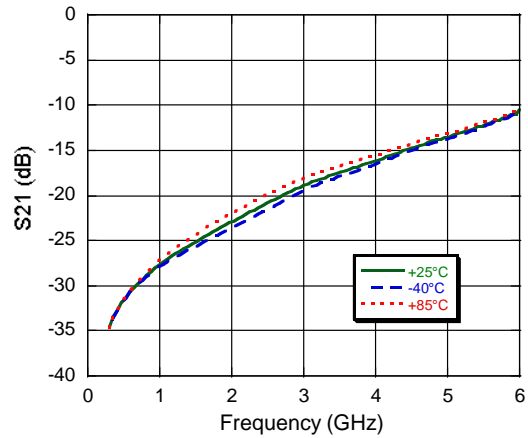


Input Return Loss

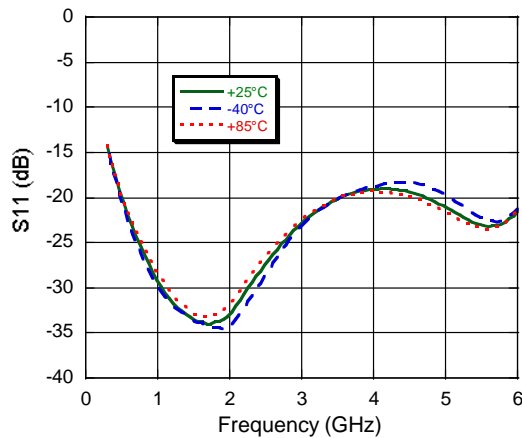


Output Return Loss

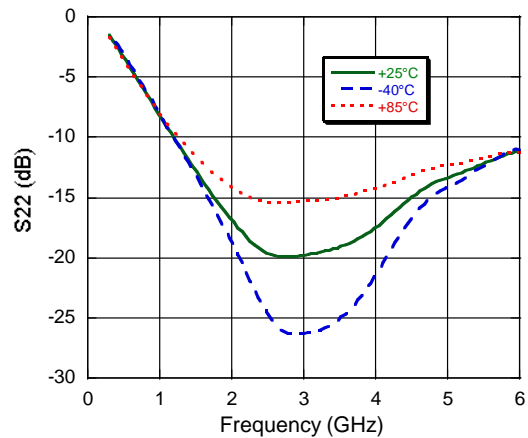

Input P1dB vs. Control Voltage

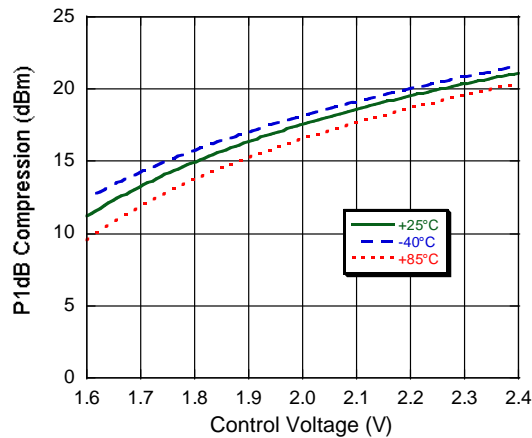

Lead-Free 1 mm 6-Lead PDFN[†]

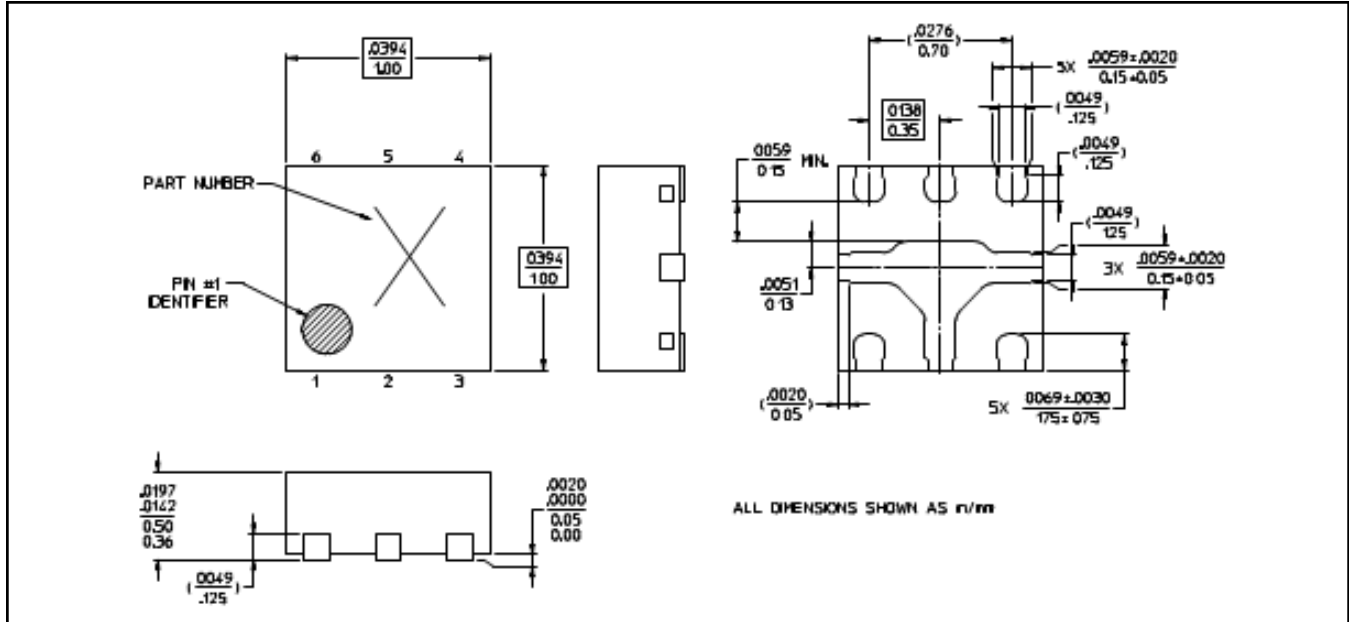

[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru