SIZE	Part Num.	Threading	Headscrew	Packaging
25	8655MH2501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH2501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH2502BLF	M3	Grey	BULK
	8655MH2502BKLF	M3	Grey	KIT

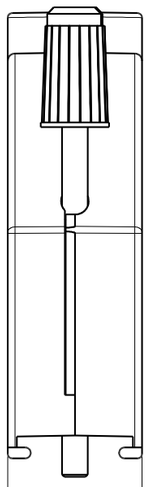

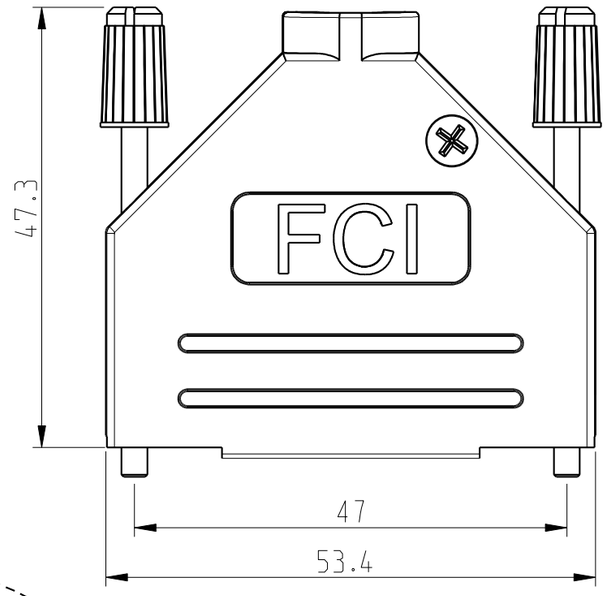

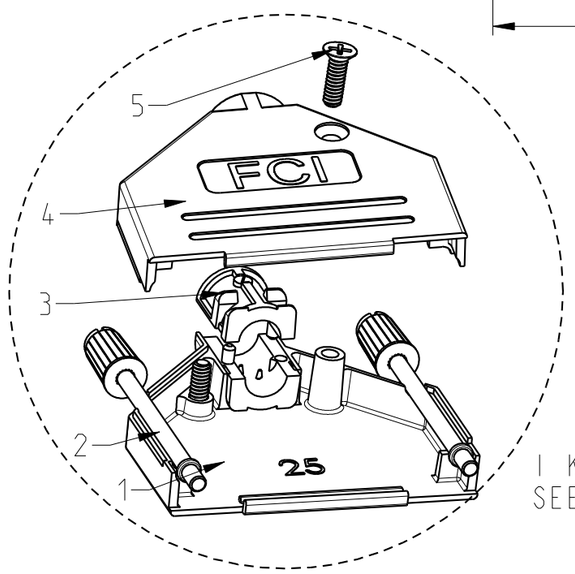

1 KIT
SEE NOTE 2



NOTES:

Material and finish: Zinc die-cast
Nickel plated

Cable strain relief: Polycarbonate (UL94V-0)

Jackscrews:
- Headscrew : plastic, color according threading
- Body : metal, threading according tables

Temperature range: -40°C to 120°C
Cable diameter: 4,0 to 13,0mm
Attenuation factor: >40 dB between 30MHz and 1 GHz
Marking FCI logo: Height 6 mm for all versions

Covers screwing force (max): 100 Ncm
Jackscrew screwing force (max): 50 Ncm

Packaging notes (see tables):

1 - Bulk : Every spare part packaged per 100 or 200 into plastic bag.5 plastic bags per carton box. 1 plastic bag per part.
2 - Kit : 1 set of spare parts necessary to realise 1 kit into a plastic bag. 100 plastic bags per carton box.

NOTE:RoHS INFORMATIONS

-The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
-The product is not intented to be exposed to a manufacturing solder process.
-Packaging spec: see GS-14-920.

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1	1			
JACKSCREW	2	2			
STRAIN RELIEF	3	2			
COVER TOP	4	1			
SCREW POZIDRIVE	5	2			

spec ref				dr	A Parrenin	2009/05/20	projection
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon	2017/01/16	mm
				chr	J Dalibard	2017/01/16	
surface ISO 1302	linear	0.X	±/	appr	Aymeric Soudy	2017/01/17	product family
		0.XX	±/				
		0.XXX	±/				
	angular	0°	±/°				

size A3	scale 3:2		
ecn no ELX-F-25931-1			
rel level Released			
Amphenol FCI	title D-SUB METAL HOODS STRAIGHT	dwg no 10085962	rev F
www.fci.com	cat. no.	Product - Customer Drw	sheet 1 of 3

© 2016 AFCI

SIZE	Part Num.	Threading	Headscrew	Packaging
09	8655MH0901BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH0901BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH0902BLF	M3	Grey	BULK
	8655MH0902BKLF	M3	Grey	KIT



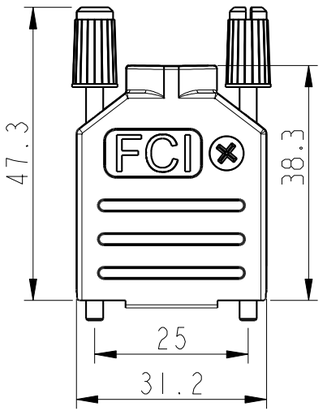

SIZE	Part Num.	Threading	Headscrew	Packaging
15	8655MH1501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH1501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH1502BLF	M3	Grey	BULK
	8655MH1502BKLF	M3	Grey	KIT



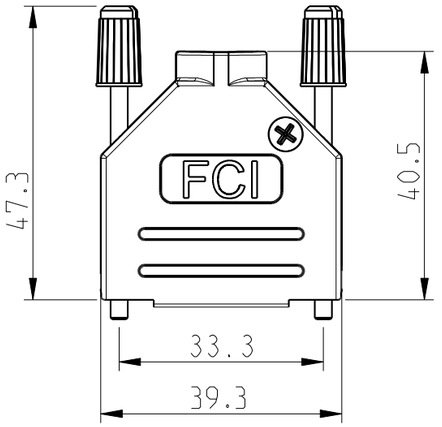

SIZE	Part Num.	Threading	Headscrew	Packaging
37	8655MH3701BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH3701BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH3702BLF	M3	Grey	BULK
	8655MH3702BKLF	M3	Grey	KIT

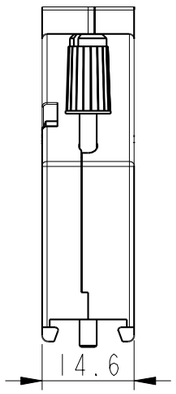

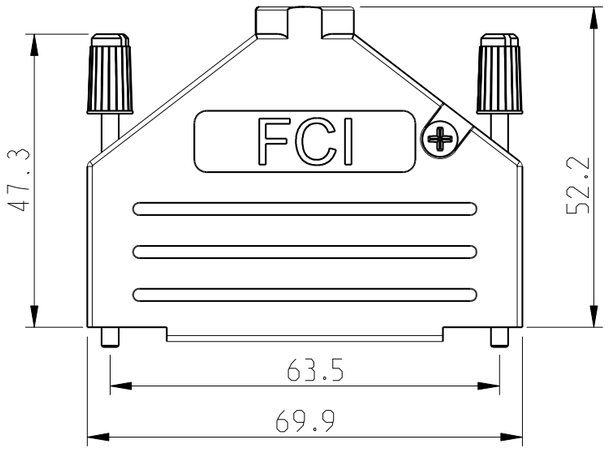

© 2016 AFCI

spec ref			dr	A Parrenin	2009/05/20	projection	mm	size A3 / scale 1:1
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m		eng	D Detouillon	2017/01/16			ecn no ELX-F-25931-1
			chr	J Dalibard	2017/01/16			
			appr	Aymeric Soudy	2017/01/17	product family		rel level Released
surface ISO 1302	linear	0.X ± /	Amphenol FCi	title	D-SUB METAL HOODS STRAIGHT		dwg no 10085962	rev F
		0.XX ± /						
		0.XXX ± /						
	angular	0° ± / °	www.fci.com	cat. no.		Product - Customer Drw		sheet 2 of 3

CABLING INSTRUCTIONS FOR CABLE ∅ 4, 5, 7 or 9 mm

1- Use two halves of strain relief, different sizes can be mixed
(∅4,5,7 or 9)

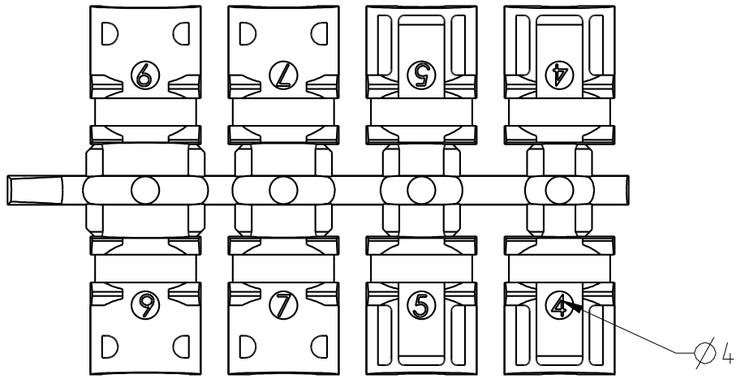

2- Strip cable 18mm and shape to two pigtails

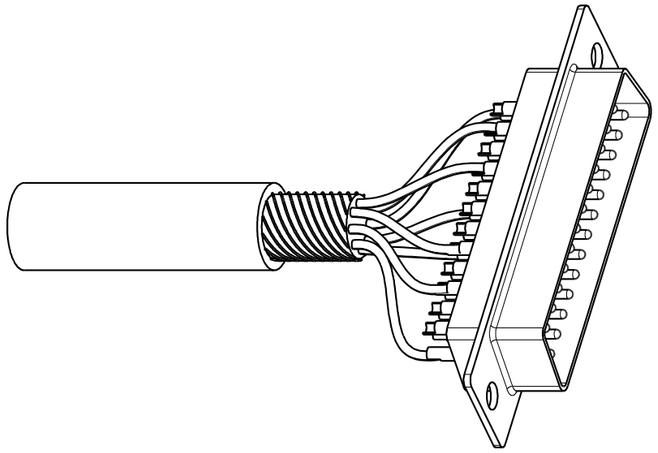

3- Attach the strain relief around the cable

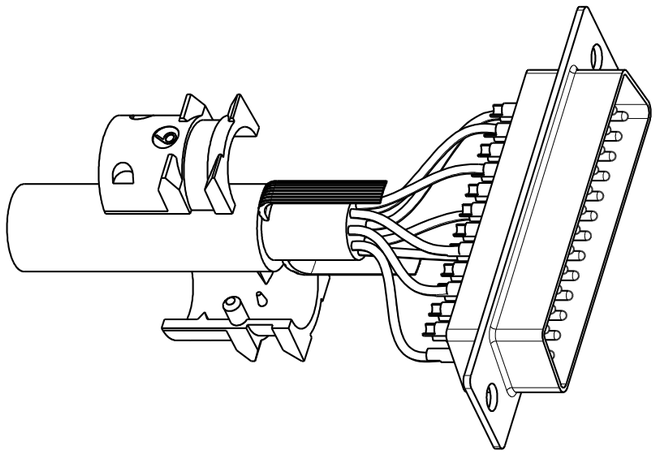

CABLING INSTRUCTIONS FOR CABLE ∅ > 9 to 11 mm

1- Use one half of strain relief, (∅9).

4- Bend cable shielding back on outside of strain relief

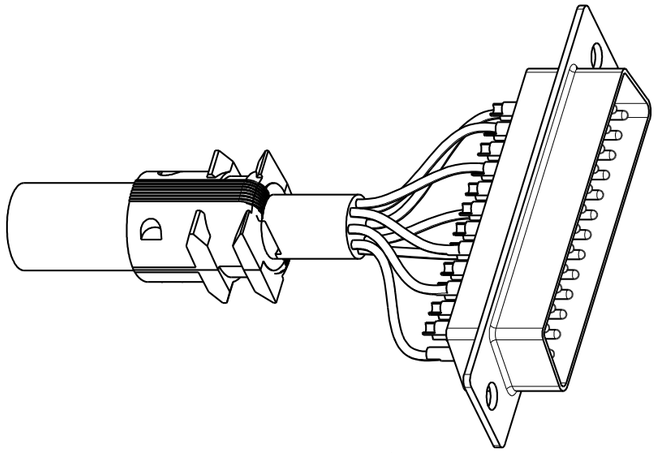

5- Mount connector and cable into the backshell

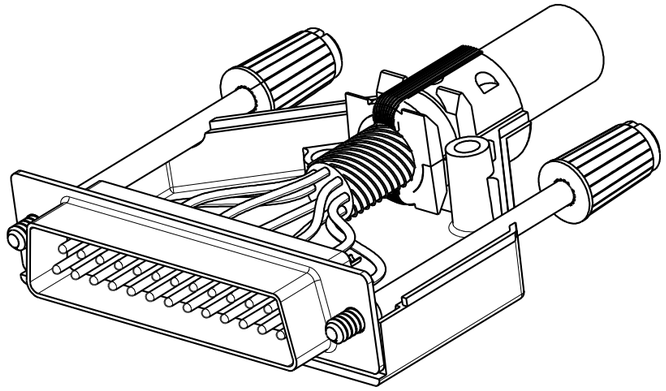

6- Assemble the other half srewing force: 100 Ncm

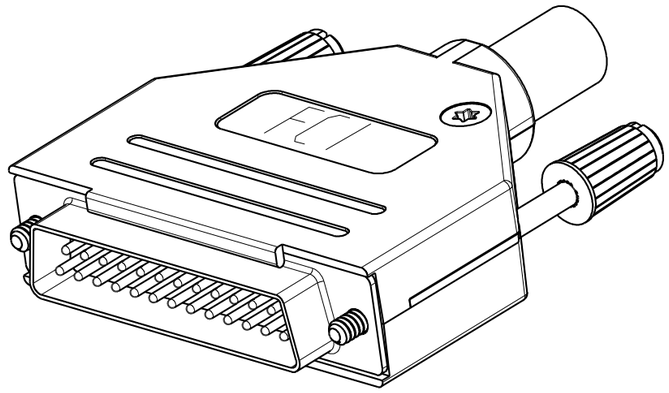

spec ref				dr	A Parrenin	2009/05/20	projection	mm	size A3 / scale 3:2
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon	2017/01/16			ecn no ELX-F-25931-1
				chr	J Dalibard	2017/01/16			
				appr	Aymeric Soudy	2017/01/17	product family		rel level Released
surface ISO 1302	linear	0.X	±/	Amphenol FCi	title: D-SUB METAL HOODS STRAIGHT			dwg no 10085962	rev F
		0.XX	±/						
		0.XXX	±/						
	angular	0°	±/°	www.fci.com	cat. no.		Product - Customer Drw		sheet 3 of 3

© 2016 AFCI

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru