

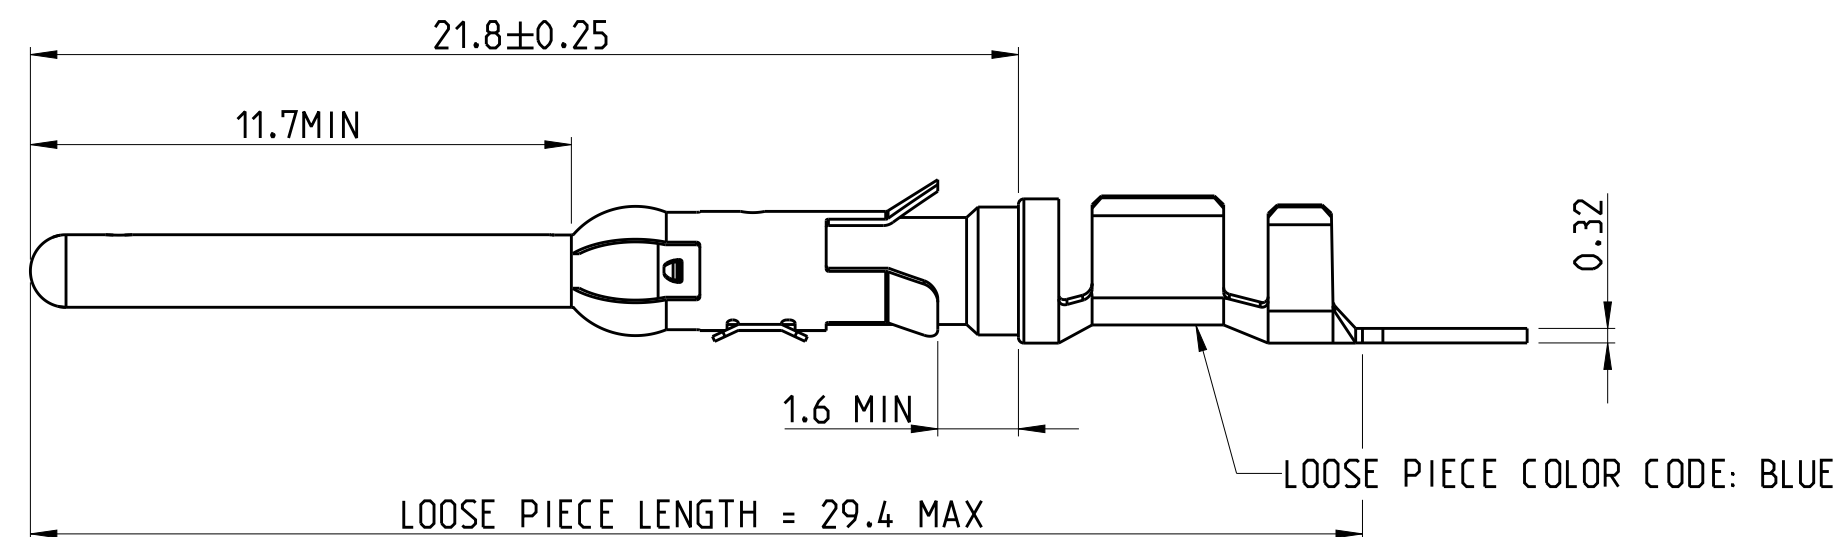


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
B	E		M1	COLOR CODE DETAILS ADDED	09JAN2014	TJ	JK
			M2	ADDITION OF NOTE 12. TEXT "REF" DIM 3 & 3.7 IN ZONE C1 & C2. "29.4 MAX" IN ZONE B3	21JULY2015	TJ	PS

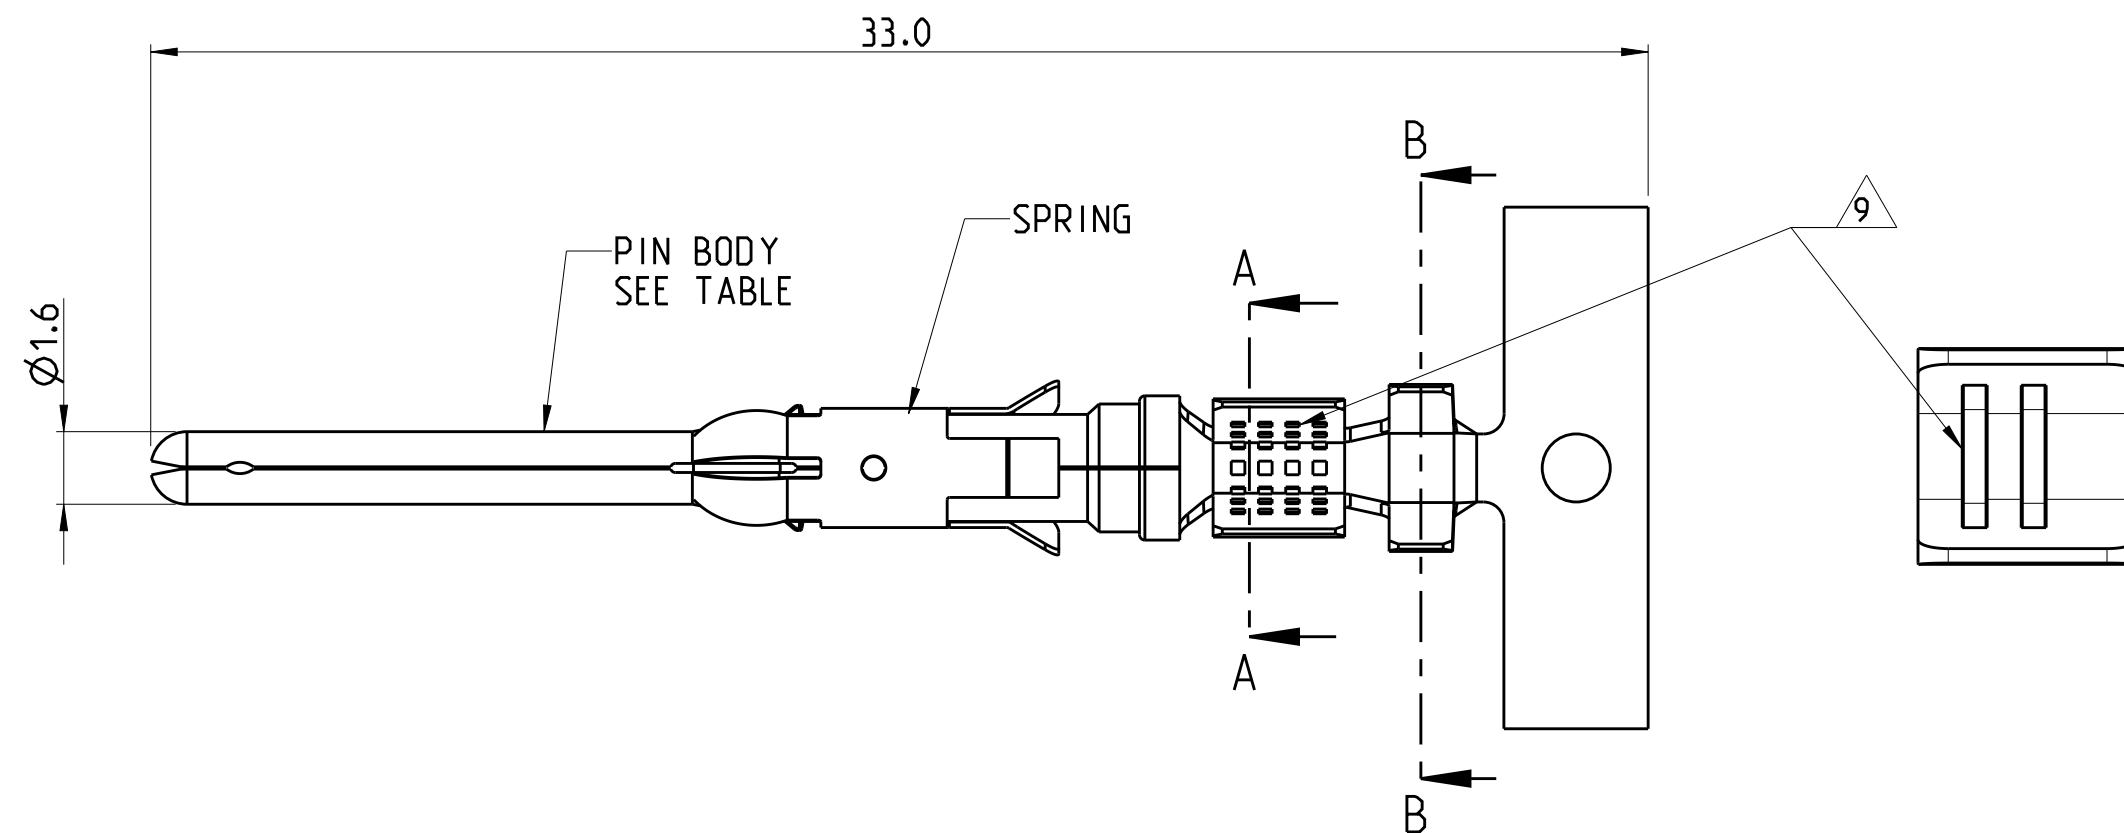


NOTES


1. 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN PRECIOUS METAL PLATE OVER ZONE 1.
1 MICRON MIN TIN PLATE OVER ZONE 2.
CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042
BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS)
2. 1.27 MICRONS MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN PRECIOUS METAL ELECTROPLATE OVER ZONE 1.
0.076 MICRON MIN GOLD FLASH PLATE OVER THE REMAINDER OF ZONE 3.
CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042
BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS)
3. 1.54 - 2.54 MICRON SILVER PLATE OVER ZONE 3.
4. 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN GOLD PLATE OVER ZONE 1.
0.076 MICRON MIN GOLDFLASH PLATE OVER THE REMAINDER OF ZONE 3.
5. 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN GOLD PLATE OVER ZONE 1.
1 MICRON MIN TIN PLATE OVER ZONE 2.
6. HOT-DIPPED PRETIN
7. 1.27 MICRONS MIN NICKEL PLATE OVER ZONE 3.
1 - 3 MICRON ELECTRO-TIN PLATE OVER ZONE 3
8. 0.76 MICRON MIN NICKEL PLATE OVER ZONE 3 PER QQ-N-290
1.5 - 2.54 MICRON SILVER PLATE OVER ZONE 3.
9. SERRATIONS CAN BE MULTI LOCK OR TWO SLOTS.
10. WIRE RANGE: 0.75 - 1.50 mm² (18-16 AWG)
11. INSULATION RANGE: 2.0 - 2.5 mm (.080-.100) DIA
12. OMISSION OF 6 CONTACTS MAX PER REEL OF 5000PCS

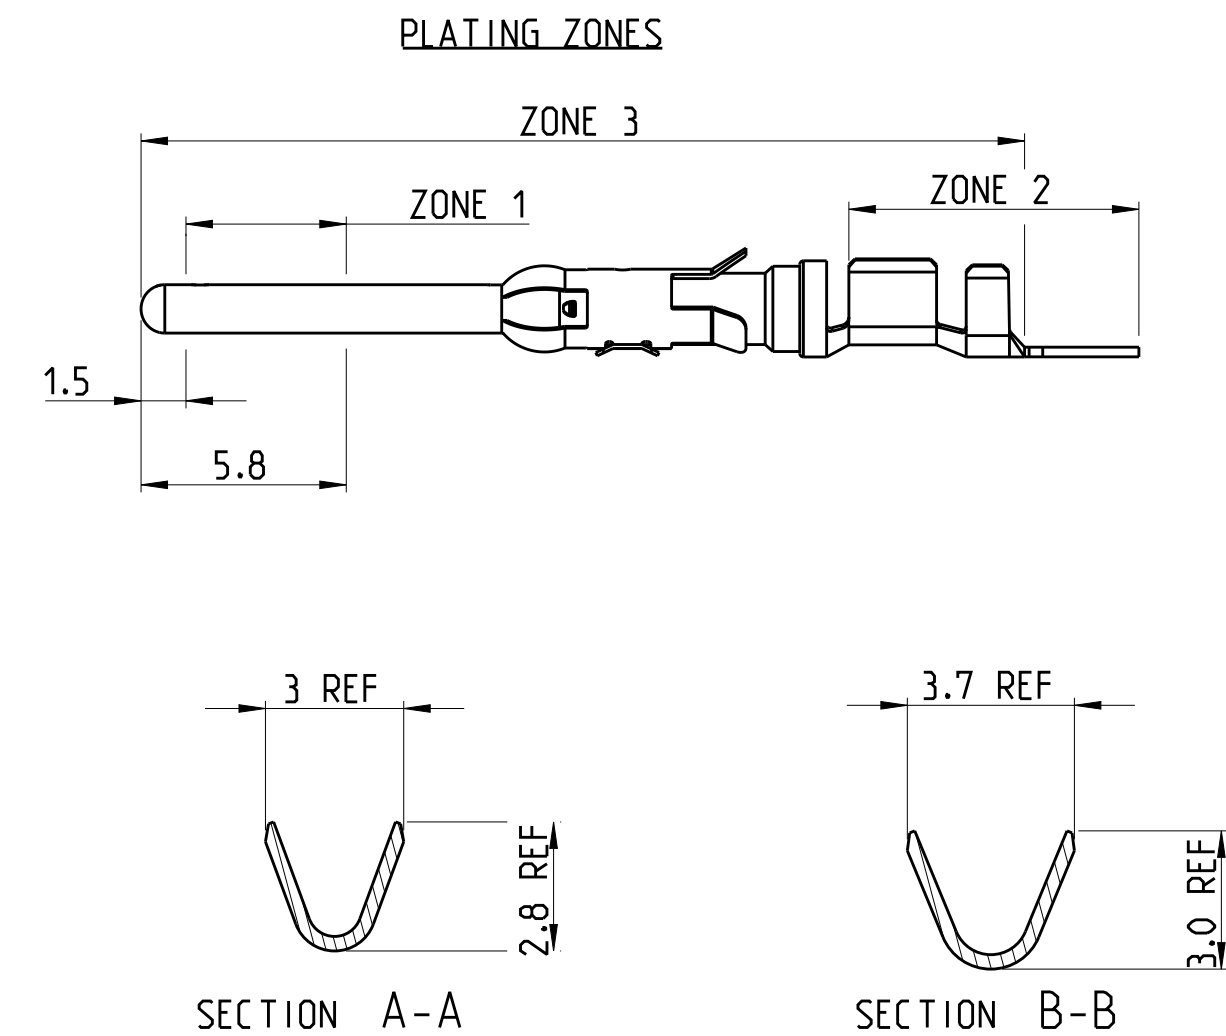

A		STAINLESS STEEL	PHBR	164 164 - 8	1- 164 161-5
A		STAINLESS STEEL	PHBR	164 164 - 7	1- 164 161-3
B		STAINLESS STEEL	PHBR		1- 164 161-2
A		STAINLESS STEEL	BRASS	164 164 - 6	1- 164 161-1
A		STAINLESS STEEL	BRASS	164 164 - 5	164 161-9
A		STAINLESS STEEL	BRASS	164 164 - 4	164 161-7
B		STAINLESS STEEL	BRASS		164 161-6
A		STAINLESS STEEL	BRASS	164 164 - 2	164 161-4
A		STAINLESS STEEL	BRASS	164 164 - 1	164 161-3
B		STAINLESS STEEL	BRASS		164 161-2
REELING	FINISH	SPRING MATERIAL	PIN BODY	LOOSE PIECE	PART NUMBER

DWN	01JUN2012			TE Connectivity					
J. BRIGHT	01JUN2012								
CHK	01JUN2012								
1 AMBROSE	01JUN2012								
APVD	01JUN2012	NAME TYPE III+, SIZE 16, PIN ASS'Y LONG SERIES, 18-16 AWG, 2.0-2.5mm DIA INSULATION							
M GREENER									
PRODUCT SPEC									
108-10042									
APPLICATION SPEC									
114-19000									
WEIGHT	-	SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		A2		00779		C=164161		-	
CUSTOMER DRAWING		SCALE		NTS		SHEET		1 OF 1	
								REV M2	

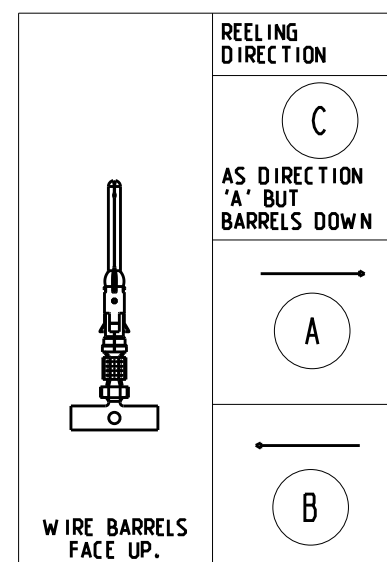

THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	±0.5 ±0.25 ±0.15 ±0.15 ± ±2°
MATERIAL	FINISH	
SEE TABLE	SEE TABLE	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru