

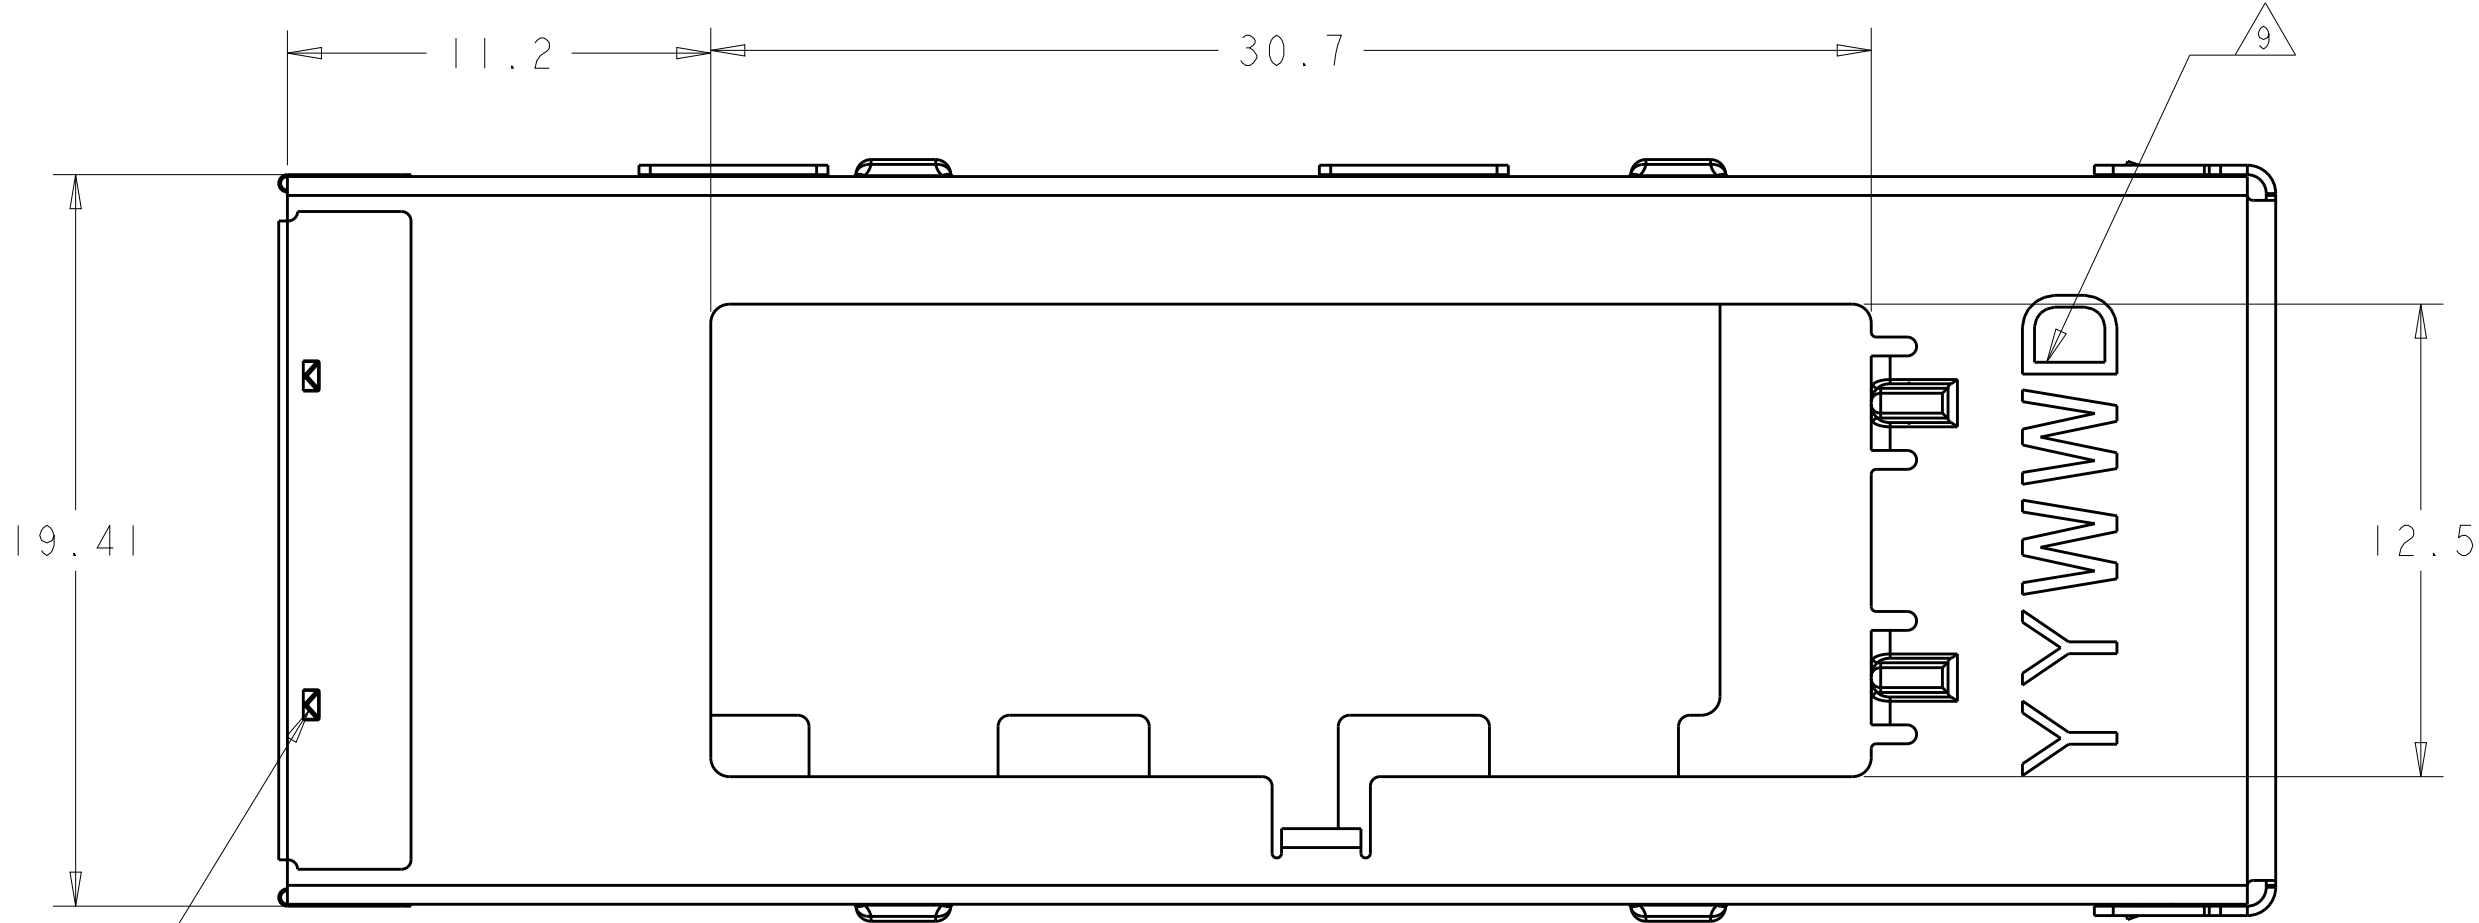
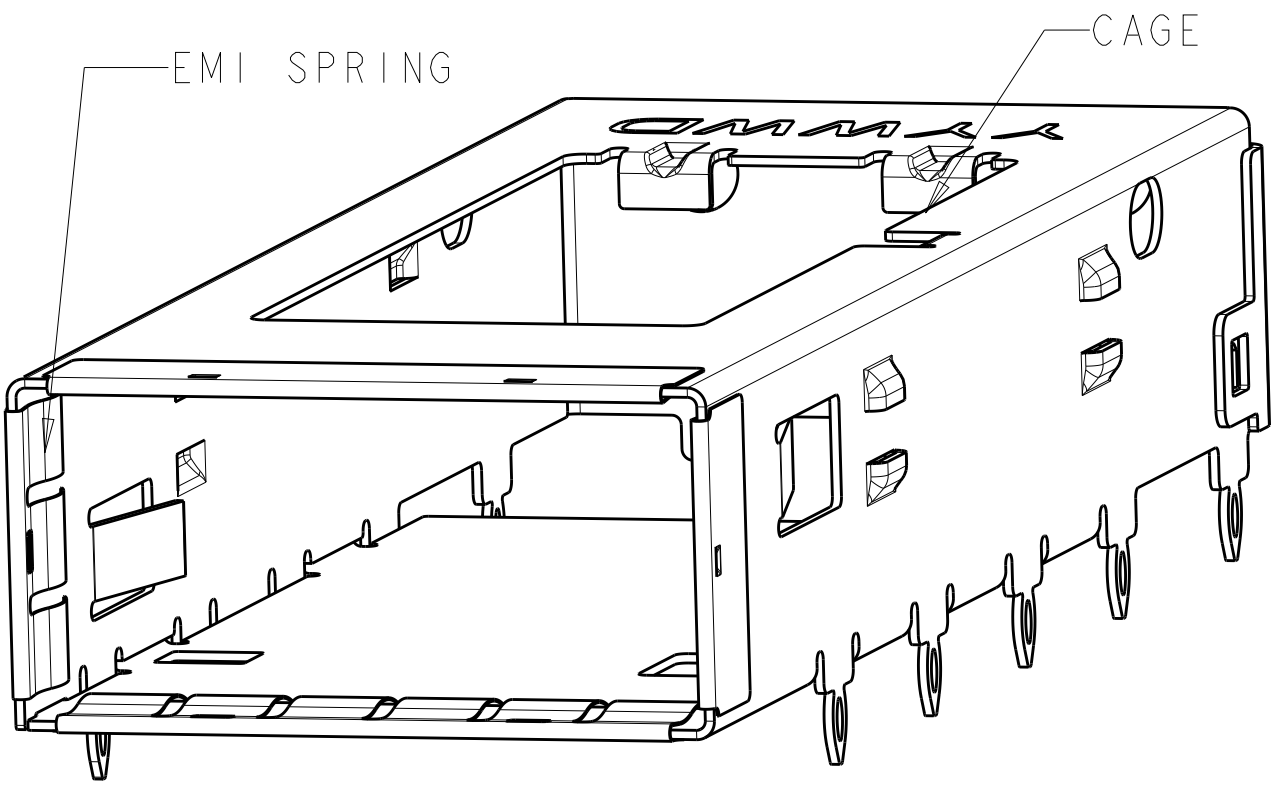



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	INITIAL RELEASE	31JAN2013	JY	AC

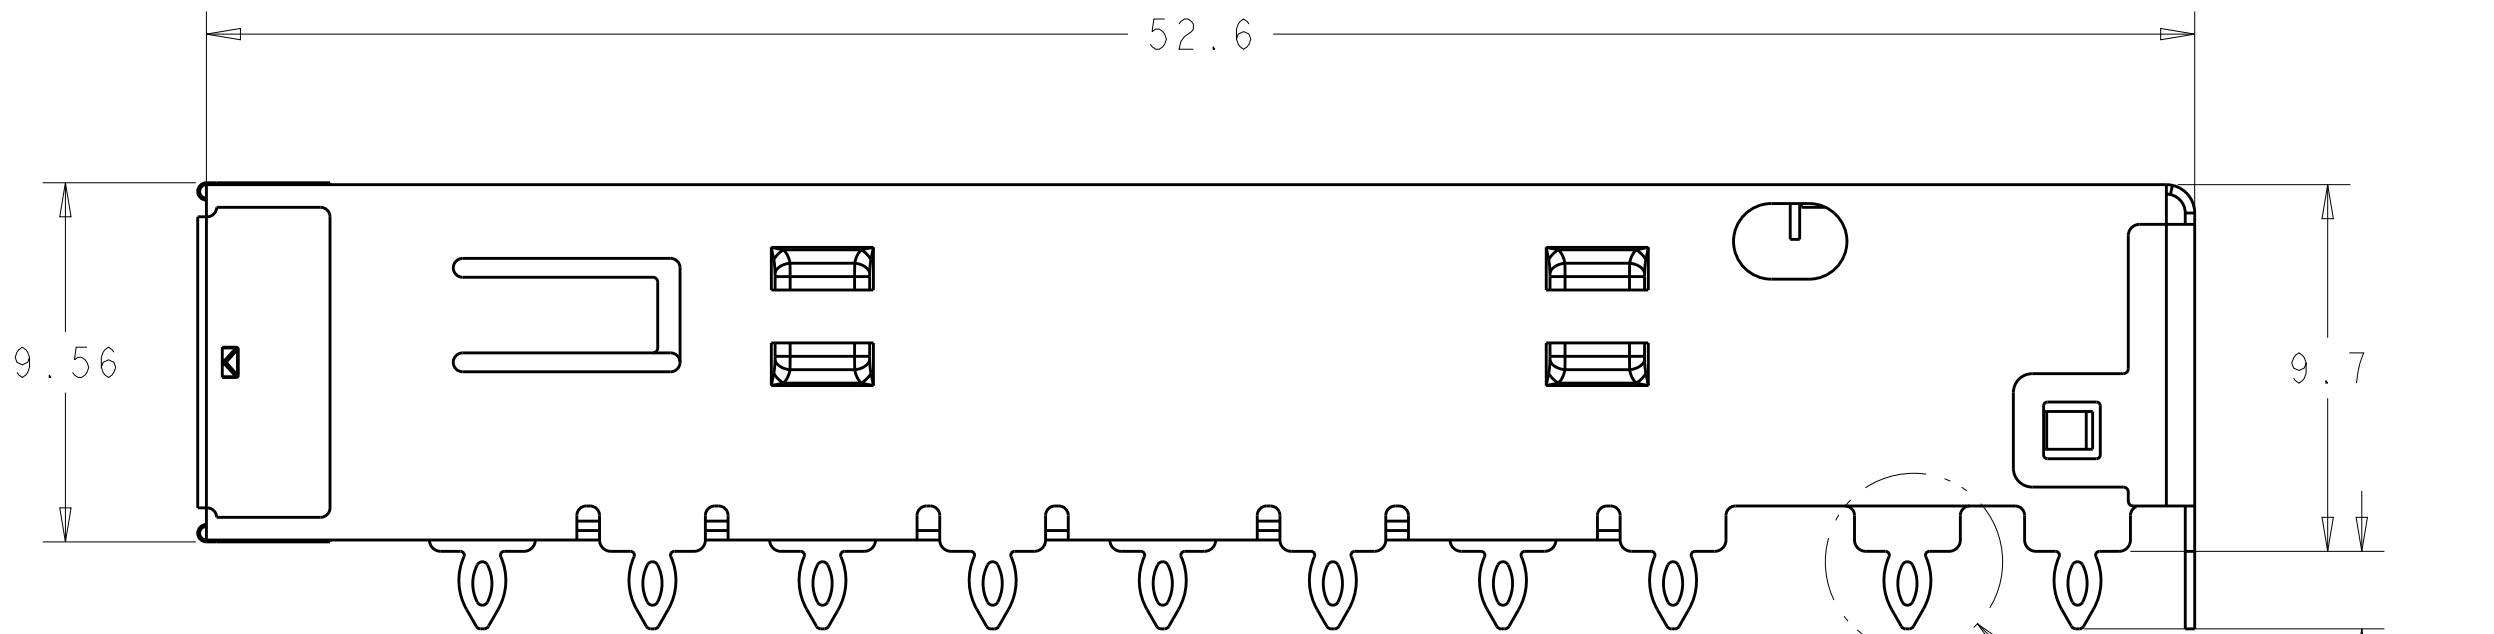


Sn42Bi58 SOLDER
6 PLACES

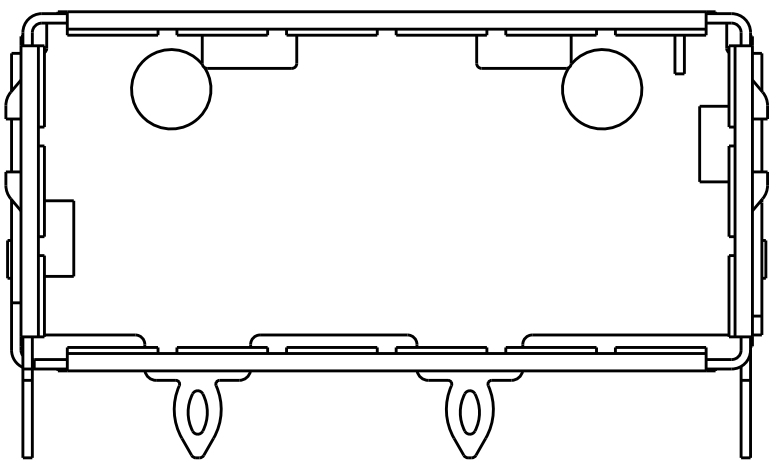

SEE DETAIL J

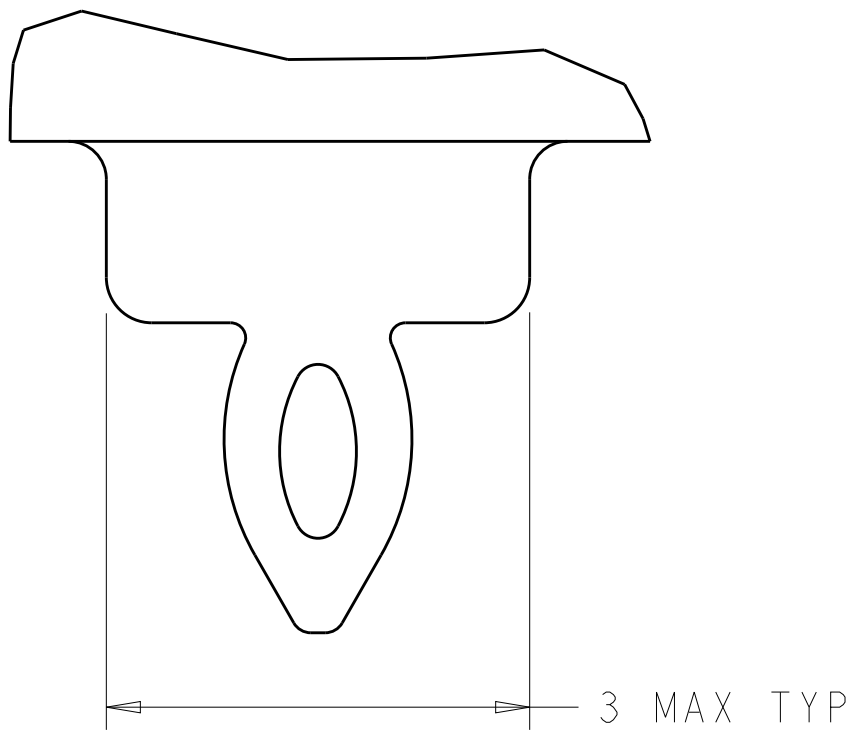

DETAIL J
SCALE 20:1

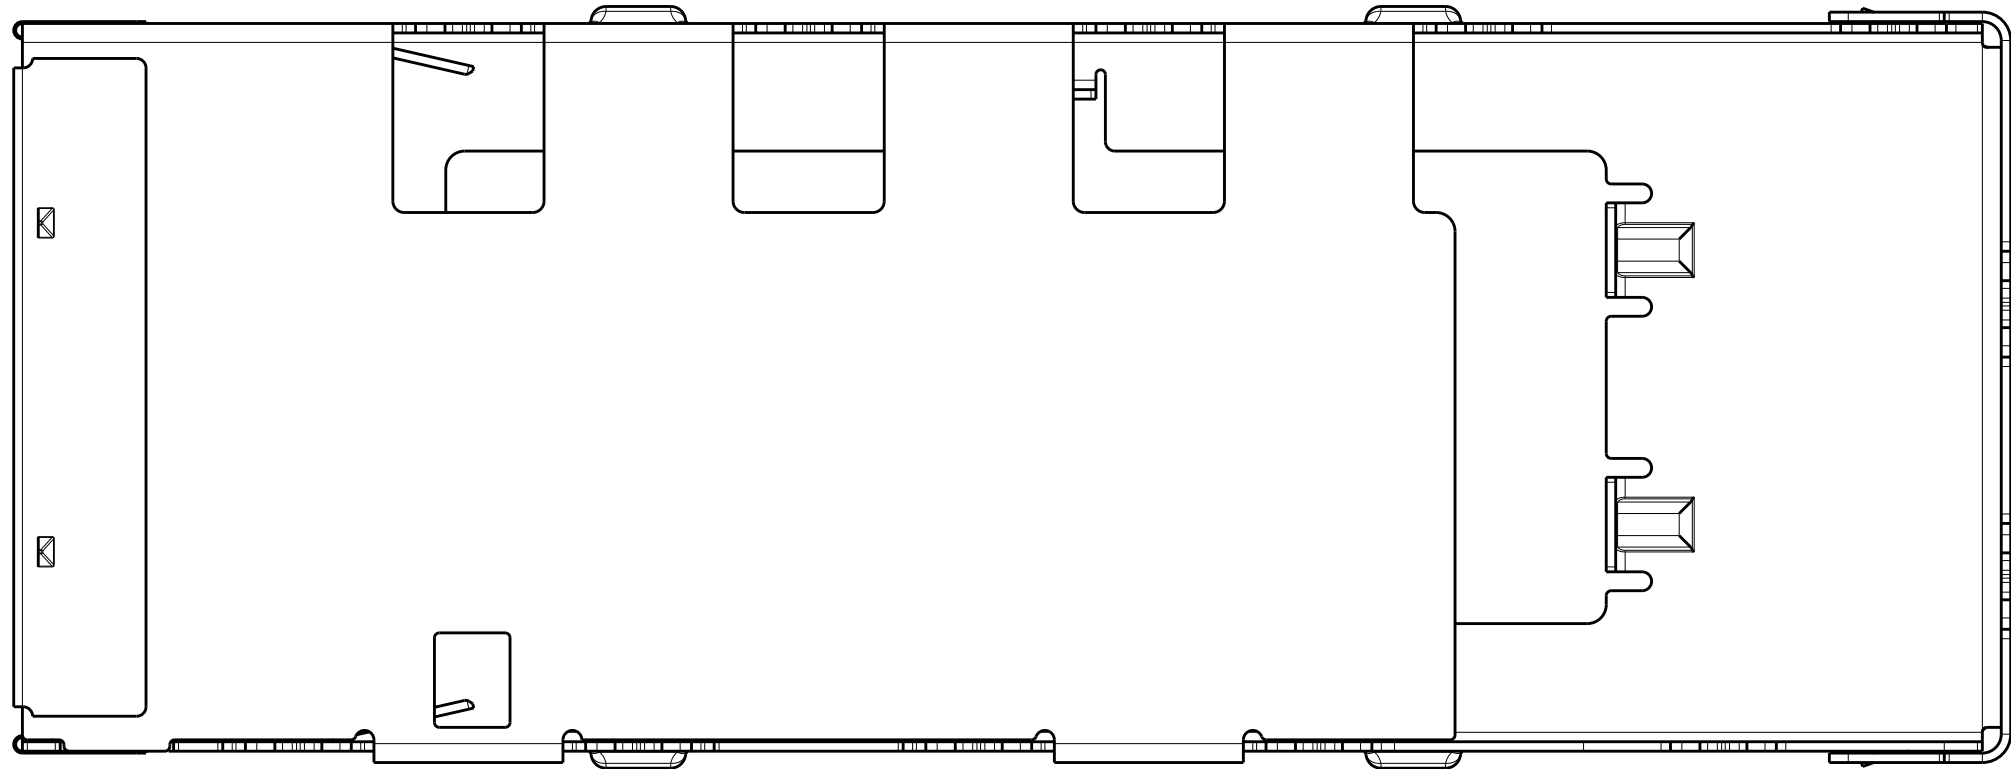


- 1. CAGE MATERIAL: NICKEL SILVER, 0.25 THICK
EMI SPRING MATERIAL: COPPER ALLOY
- 2. MINIMUM PITCH DIMENSION.
- 3. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER.
- 4. REFERENCE APPLICATION SPEC 114-13218 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 5. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6. DIMENSION C IS THE NOMINAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD.
SINGLE SIDED PC BOARD MINIMUM THICKNESS: 1.45
DOUBLE SIDED PC BOARD MINIMUM THICKNESS: 2.7.
- 7. DATUM -A- IS TOP SURFACE OF HOST BOARD.
- 8. SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS, SHOWN IN DETAIL J, CONTACT PC BOARD.
- 9. DATE CODE (YYWWD) MARKED ON TOP OF CAGE AND CONCEALED BY HEAT SINK APPLIES TO CAGE ASSEMBLY ONLY.
- 10. EMI SPRING FINISH: 2µm MIN TIN.
- 11. PRODUCT HAS NOT COMPLETED QUALIFICATION TESTING.



2170398-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: JASON YANG 21AUG2012 CHK: ALEX CAI 21AUG2012 APVD: ALEX CAI 21AUG2012	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.25 1 PLC ±0.25 2 PLC ±0.15 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH	NAME: IXI QSFP, CAGE ASSEMBLY W/O FLANGE	
MATERIAL:		PRODUCT SPEC: 108-2286 APPLICATION SPEC: 114-13218 WEIGHT: -	SIZE: A100779C=2170398	
Customer Drawing		SCALE: 5:1	SHEET: 1 OF 4	REV: A


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

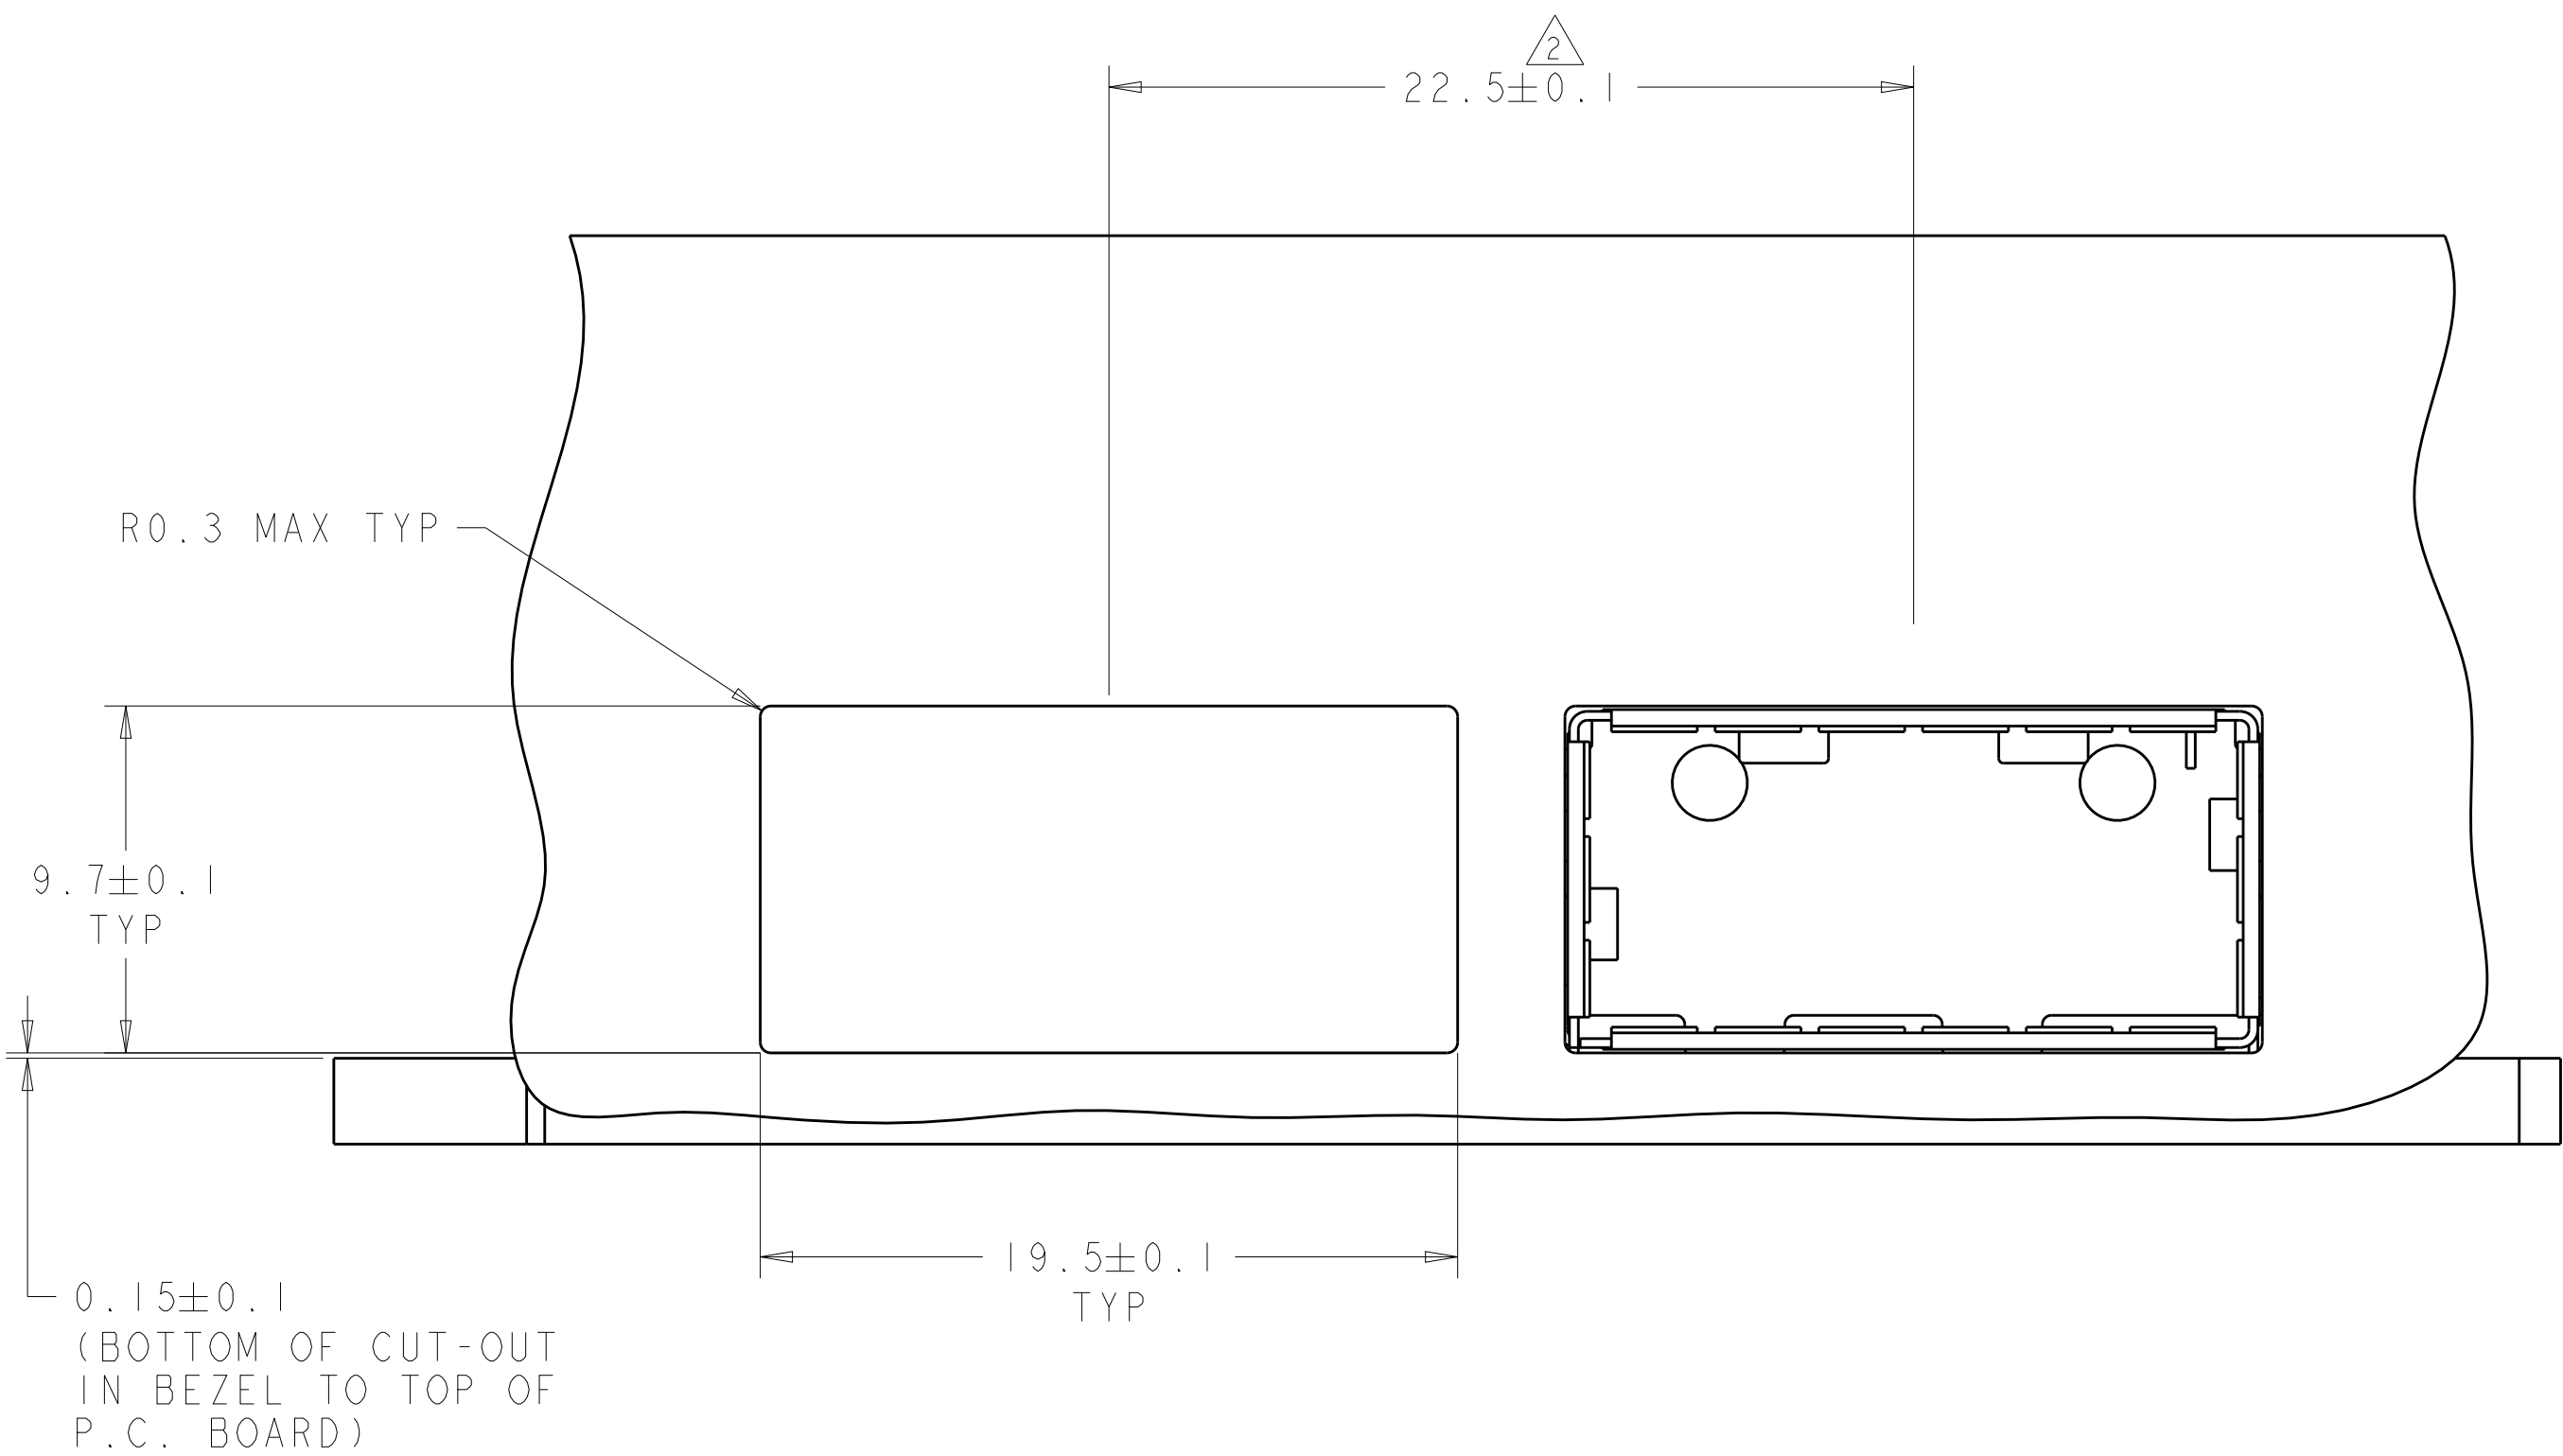


ONE SIDED CONFIGURATION

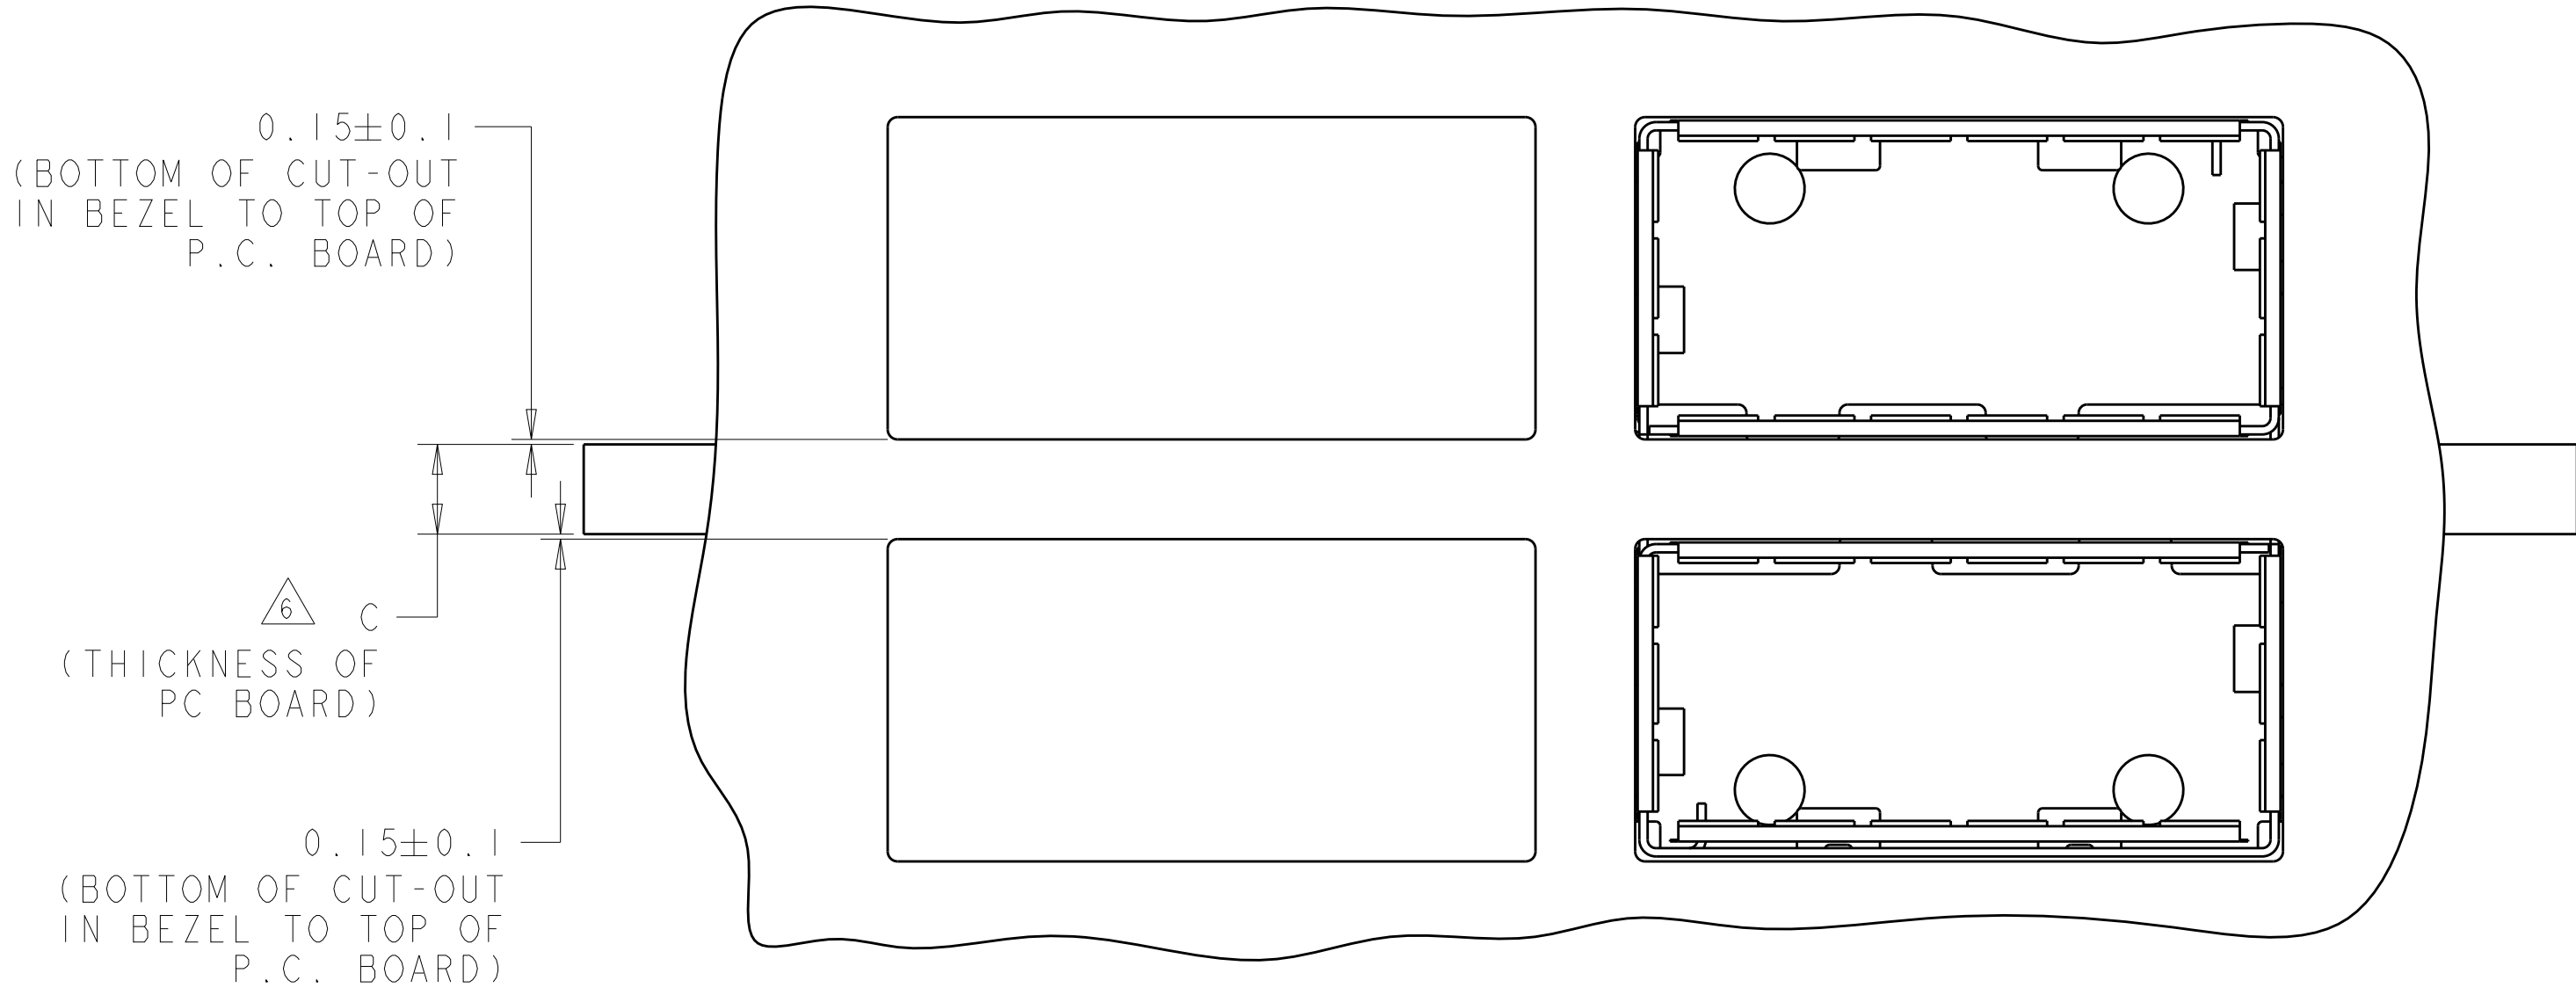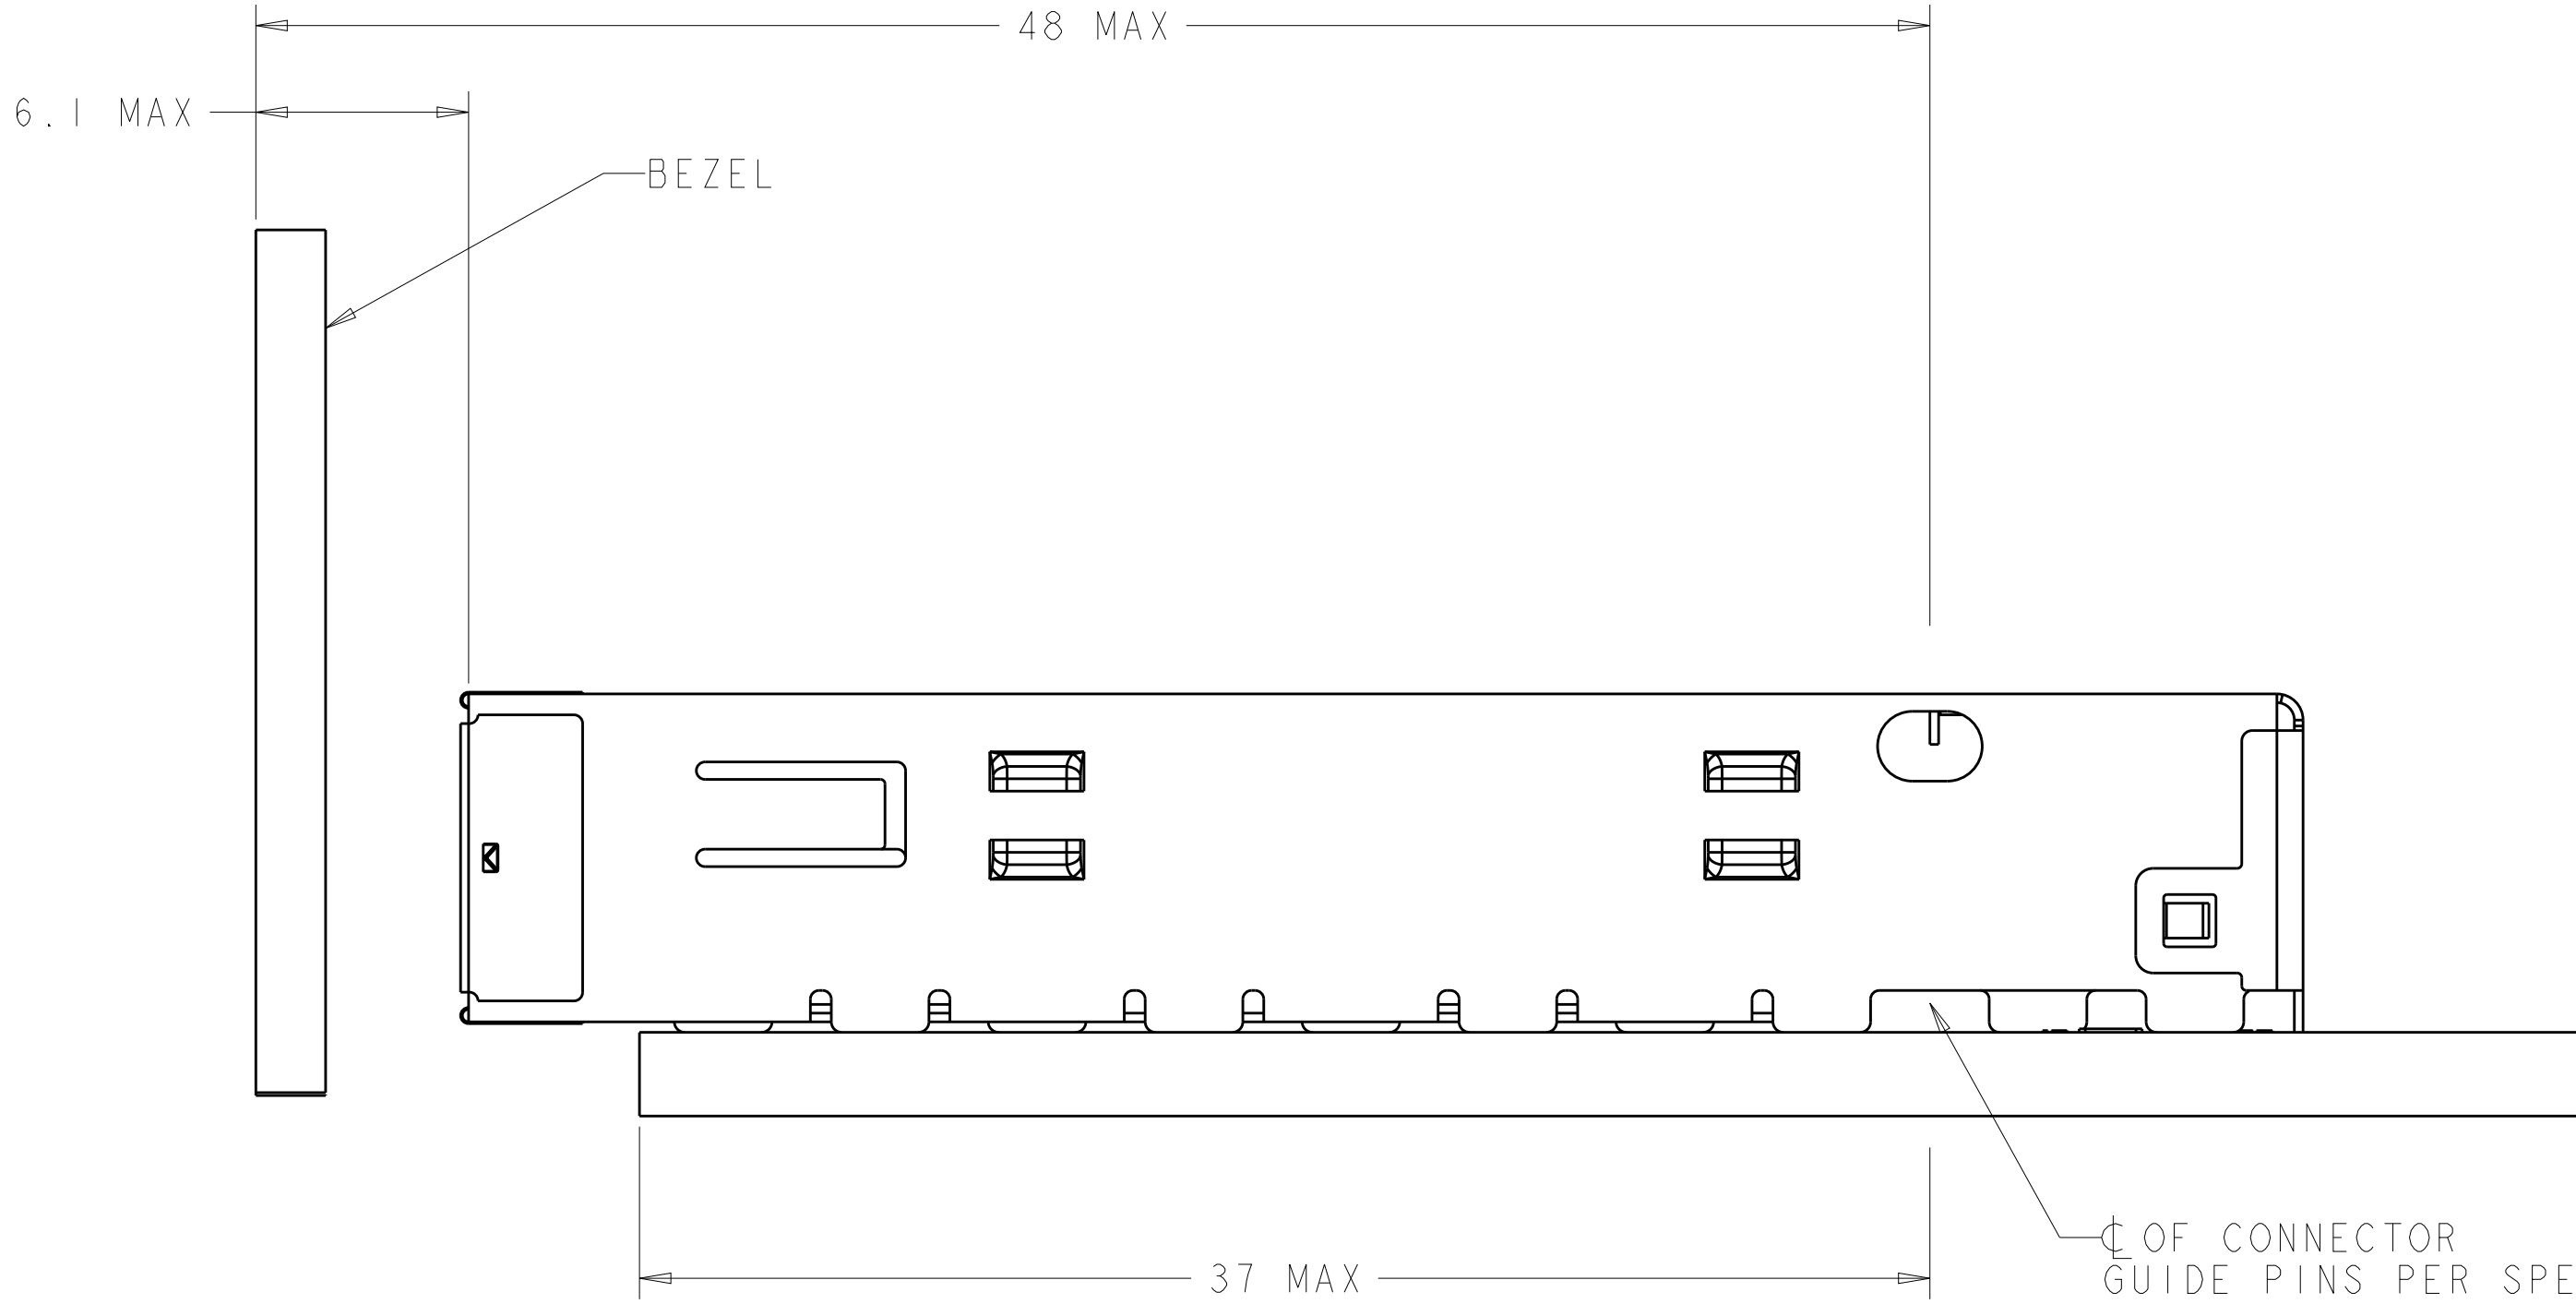


BELLY TO BELLY CONFIGURATION
SIMILAR TO ONE SIDED EXCEPT
WHERE NOTED

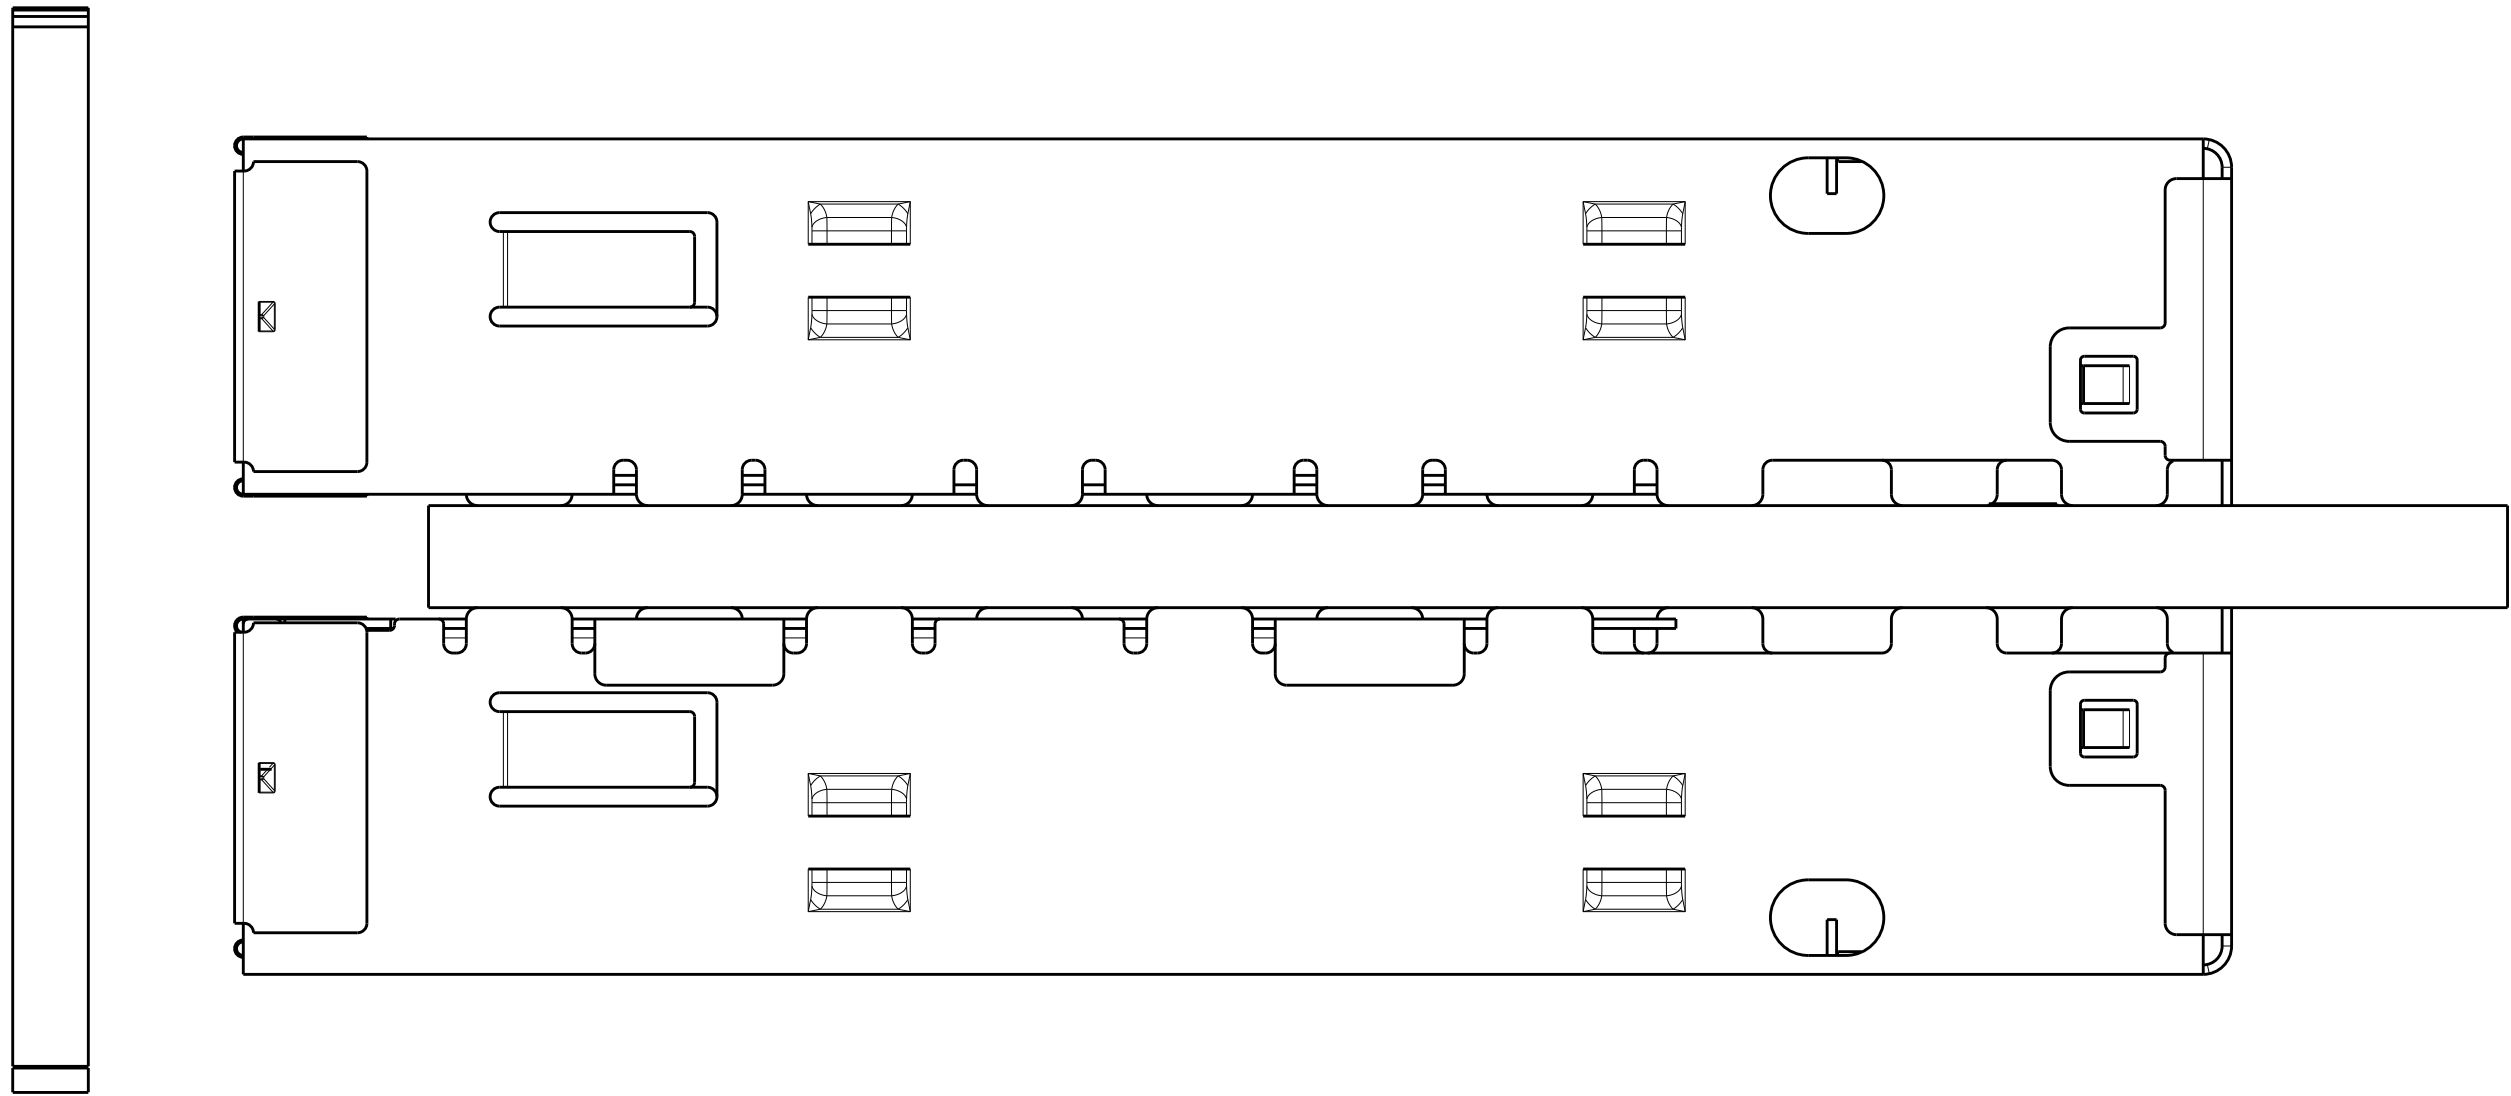

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: JASON YANG 21AUG2012	TE Connectivity	
		CHK: ALEX CAI 21AUG2012		
DIMENSIONS:		APVD: ALEX CAI 21AUG2012	NAME: IX1 QSFP, CAGE ASSEMBLY W/O FLANGE	
mm		PRODUCT SPEC	SIZE: A1	
		108-2286	CAGE CODE: 00779	
		APPLICATION SPEC	DRAWING NO: C=2170398	
		114-13218	RESTRICTED TO: -	
MATERIAL: -		WEIGHT: -	SCALE: 5:1	
		Customer Drawing	SHEET 2 OF 4	
			REV A	

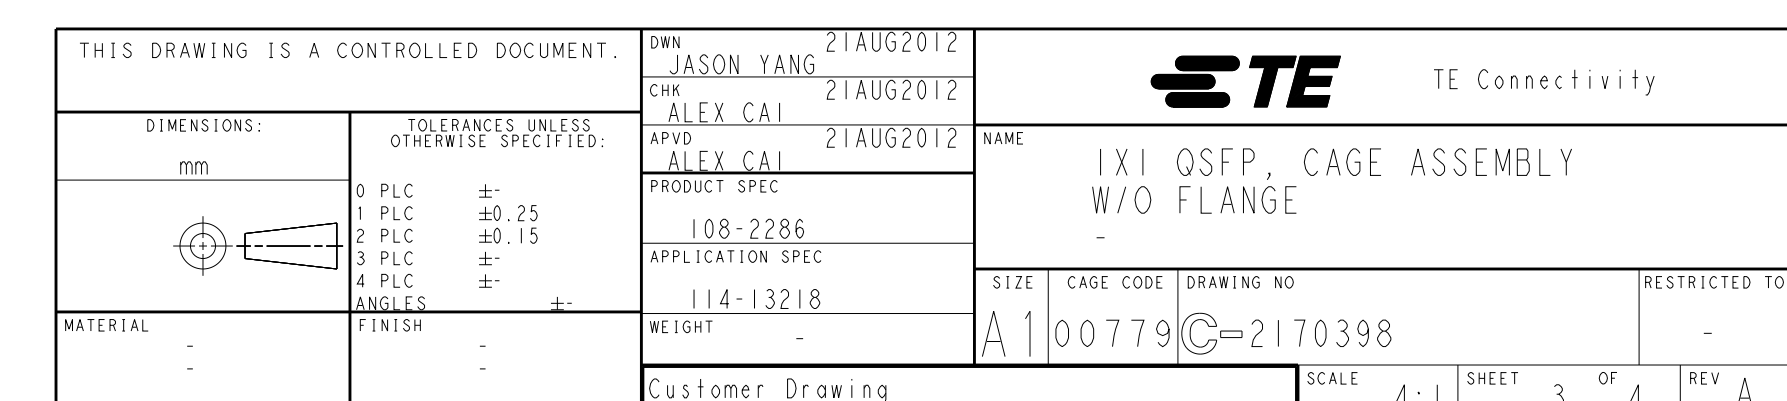

RECOMMENDED PCB LAYOUT
SINGLE SIDED CONFIGURATION
TOLERANCE: ± 0.05
SCALE 8:1

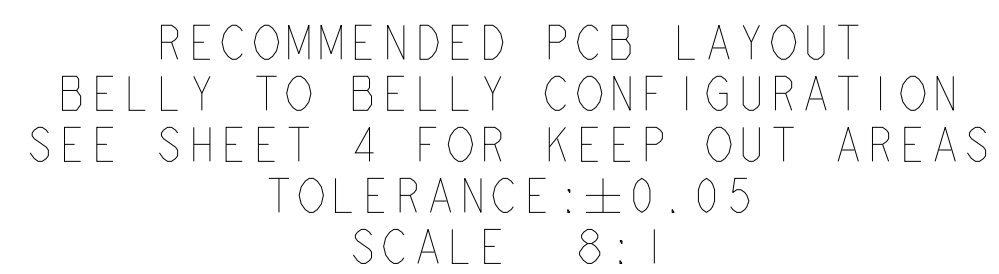4805 (3/11)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru