



Dual 1 Form A Solid-State Relay

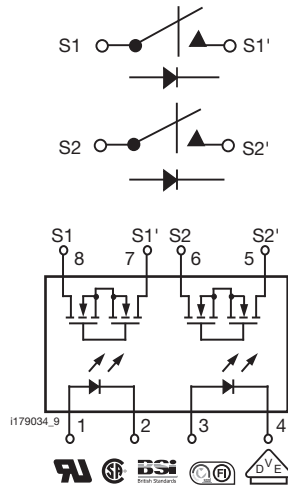

FEATURES

- Two independent relays
- Current limit protection
- Isolation test voltage 5300 V_{RMS}
- Typical R_{ON} 15 Ω
- Load voltage 250 V
- Load current 120 mA
- High surge capability
- Clean bounce free switching
- Low power consumption
- High reliability monolithic receptor
- SMD lead available on tape and reel
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

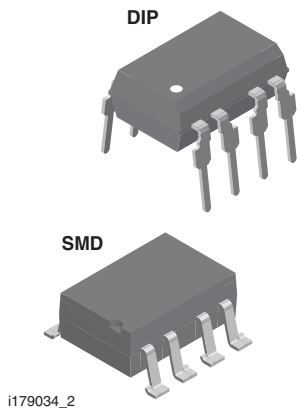

RoHS
COMPLIANT

DESCRIPTION

The LH1505 contains two normally open switches that can be used as two independent SPST relays or as one DPST relay. The relay is constructed using a GaAs LED for actuation control and integrated monolithic dies for the switch outputs. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry, and DMOS switches. In addition, the LH1505 relay employs current limiting circuitry, enabling it to pass lightning surge testing as per ANSI/TIA-968-B and other regulatory voltage surge requirements when overvoltage protection is provided.

APPLICATIONS

- General telecom switching
 - On/off hook control
 - Ring delay
 - Dial pulse
 - Ground start
 - Ground fault protection
- Instrumentation
- Industrial controls

AGENCY APPROVALS

- UL1577: file no. E52744 system code H, double protection
- CSA: certification no. 093751
- BSI/BABT: certification no. 7980
- DIN EN: 60747-5-2 (VDE 0884)/60747-5-5 (pending), available with option 1
- FIMKO: approval

| ORDERING INFORMATION | | | | | | | | | | | |
|----------------------|---|---|---|---|---|----------------------------|-----------------|---|---------------|---|------|
| L | H | 1 | 5 | 0 | 5 | A | # | # | T | R | |
| PART NUMBER | | | | | | ELECTR. VARIATION | PACKAGE CONFIG. | | TAPE AND REEL | | |
| PACKAGE | | | | | | UL, CSA, BSI, FIMKO | | | | | |
| SMD-8, tubes | | | | | | LH1505AAC | | | | | |
| SMD-8, tape and reel | | | | | | LH1505AACTR | | | | | |
| DIP-8, tubes | | | | | | LH1505AB | | | | | |



| ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) | | | | |
|---|---|------------|---------------|--------------------|
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| INPUT | | | | |
| LED continuous forward current | | I_F | 50 | mA |
| LED reverse voltage | $I_R \leq 10\text{ }\mu\text{A}$ | V_R | 8 | V |
| OUTPUT | | | | |
| DC or peak AC load voltage | $I_L \leq 50\text{ }\mu\text{A}$ | V_L | 250 | V |
| Continuous DC load current, one pole operating | | I_L | 130 | mA |
| Continuous DC load current, two poles operating | | I_L | 120 | mA |
| Peak load current (single shot), form B | $t = 100\text{ ms}$ | I_P | (3) | |
| SSR | | | | |
| Ambient operating temperature range | | T_{amb} | - 40 to + 85 | $^{\circ}\text{C}$ |
| Storage temperature range | | T_{stg} | - 40 to + 150 | $^{\circ}\text{C}$ |
| Pin soldering temperature (1) | $t = 10\text{ s max.}$ | T_{sid} | 260 | $^{\circ}\text{C}$ |
| Input to output isolation test voltage | $t = 1\text{ s, } I_{ISO} = 10\text{ }\mu\text{A max.}$ | V_{ISO} | 5300 | V_{RMS} |
| Pole-to-pole isolation voltage (S1 to S2) (2), (dry air, dust free, at sea level) | | | 1600 | V |
| Output power dissipation (continuous) | | P_{diss} | 600 | mW |

Notes

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.
- Refer to reflow profile for soldering conditions for surface mounted devices (SMD). Refer to wave profile for soldering conditions for through hole devices (DIP).
 - Breakdown occurs between the output pins external to the package.
 - Refer to current limit performance application note for a discussion on relay operation during transient currents.

| ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) | | | | | | |
|---|--|------------|------|------|------|---------------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| INPUT | | | | | | |
| LED forward current, switch turn-on | $I_L = 100\text{ mA, } t = 10\text{ ms}$ | I_{Fon} | | 1 | 2 | mA |
| LED forward current, switch turn-off | $V_L = \pm 200\text{ V}$ | I_{Foff} | 0.2 | 0.9 | | mA |
| LED forward voltage | $I_F = 10\text{ mA}$ | V_F | 1.15 | 1.26 | 1.45 | V |
| OUTPUT | | | | | | |
| On-resistance | $I_F = 5\text{ mA, } I_L = 50\text{ mA}$ | R_{ON} | 10 | 15 | 20 | Ω |
| Off-resistance | $I_F = 0\text{ mA, } V_L = \pm 100\text{ V}$ | R_{OFF} | 0.5 | 5000 | | $G\Omega$ |
| Current limit | $I_F = 5\text{ mA, } t = 5\text{ ms, } V_L = \pm 6\text{ V}$ | I_{LMT} | 170 | 200 | 280 | mA |
| Off-state leakage current | $I_F = 0\text{ mA, } V_L = \pm 100\text{ V}$ | I_O | | 0.02 | 200 | nA |
| | $I_F = 0\text{ mA, } V_L = \pm 250\text{ V}$ | I_O | | | 1 | μA |
| Output capacitance | $I_F = 0\text{ mA, } V_L = 1\text{ V}$ | C_O | | 55 | | pF |
| | $I_F = 0\text{ mA, } V_L = 50\text{ V}$ | C_O | | 10 | | pF |
| Pole-to-pole capacitance (S1 to S2) | $I_F = 5\text{ mA}$ | | | 0.5 | | pF |
| Switch offset | $I_F = 5\text{ mA}$ | V_{OS} | | 0.15 | | μV |
| TRANSFER | | | | | | |
| Capacitance (input to output) | $V_{ISO} = 1\text{ V}$ | C_{IO} | | 1.1 | | pF |

Note

- Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.


| SWITCHING CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) | | | | | | |
|--|--|-----------|------|---------|-------|------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| Turn-on time | $I_F = 5\text{ mA, } I_L = 50\text{ mA}$ | t_{on} | | 1.4 (1) | 4 (1) | ms |
| Turn-off time | $I_F = 5\text{ mA, } I_L = 50\text{ mA}$ | t_{off} | | 0.7 (1) | 4 (1) | ms |

Note


- $I_L = 100\text{ mA}$.




TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)

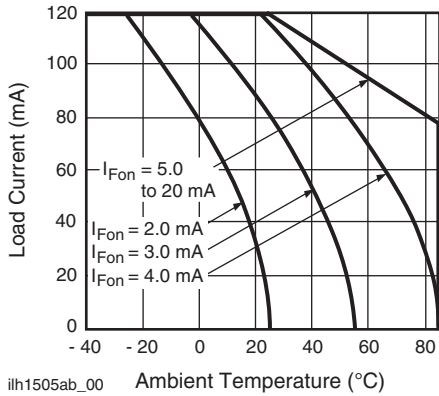


ih1505ab_00 Ambient Temperature (°C)
Fig. 1 - Recommended Operating Conditions

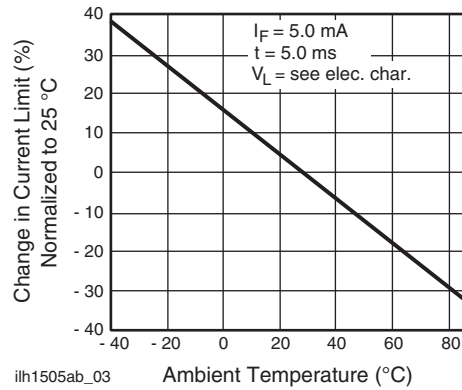


ih1505ab_03 Ambient Temperature (°C)
Fig. 4 - Current Limit vs. Temperature

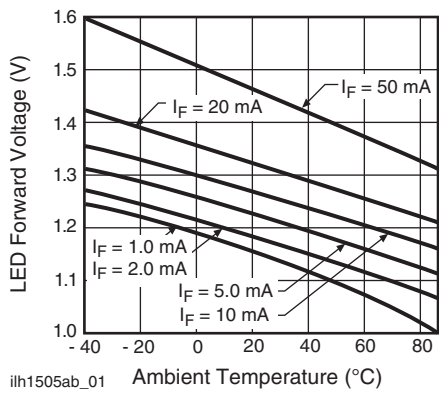


ih1505ab_01 Ambient Temperature (°C)
Fig. 2 - LED Voltage vs. Temperature

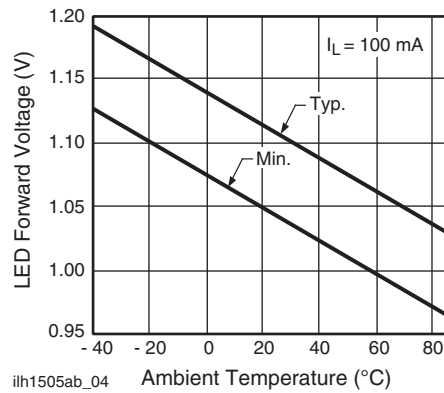


ih1505ab_04 Ambient Temperature (°C)
Fig. 5 - LED Dropout Voltage vs. Temperature

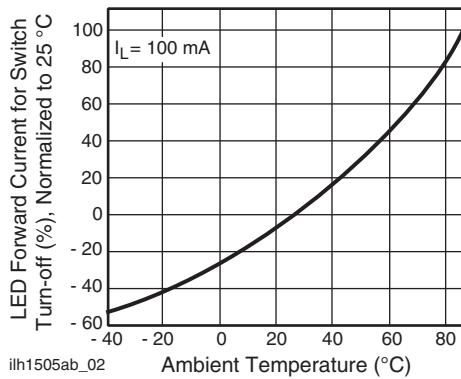

ih1505ab_02 Ambient Temperature (°C)
Fig. 3 - LED Current for Switch Turn-on vs. Temperature

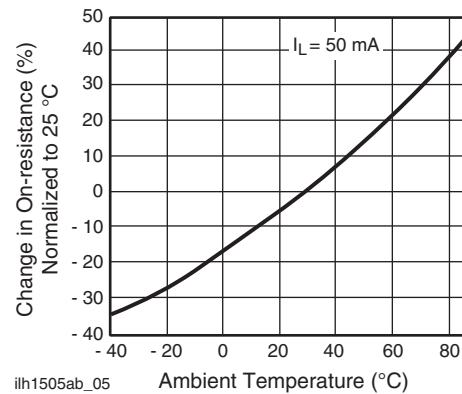


ih1505ab_05 Ambient Temperature (°C)
Fig. 6 - On-Resistance vs. Temperature

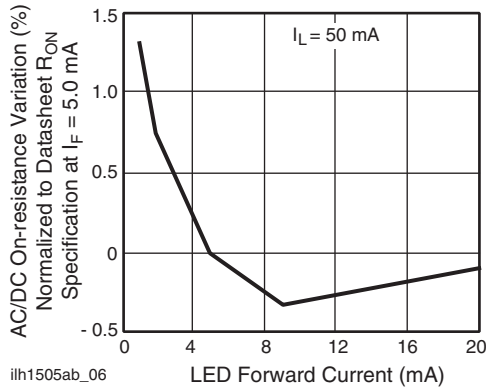


ih1505ab_06

Fig. 7 - Variation in On-Resistance vs. LED Current

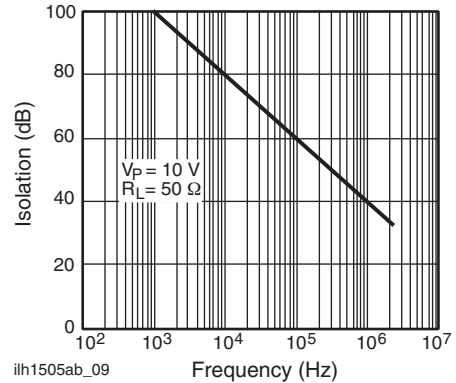


ih1505ab_09

Fig. 10 - Output Isolation

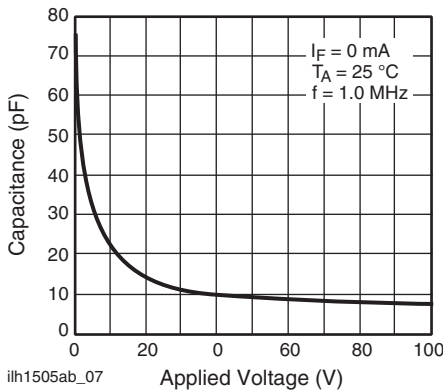


ih1505ab_07

Fig. 8 - Switch Capacitance vs. Applied Voltage

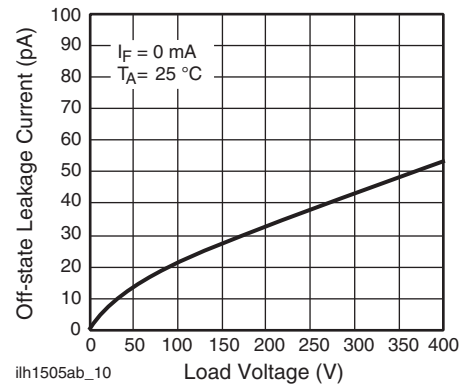


ih1505ab_10

Fig. 11 - Leakage Current vs. Applied Voltage

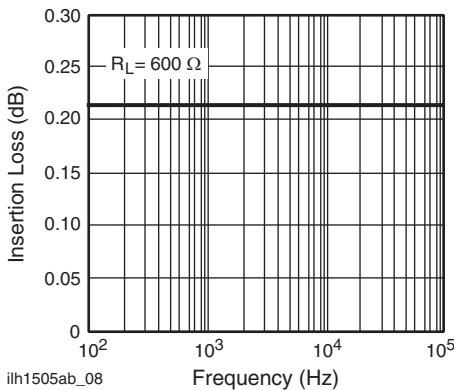

ih1505ab_08

Fig. 9 - Insertion Loss vs. Frequency

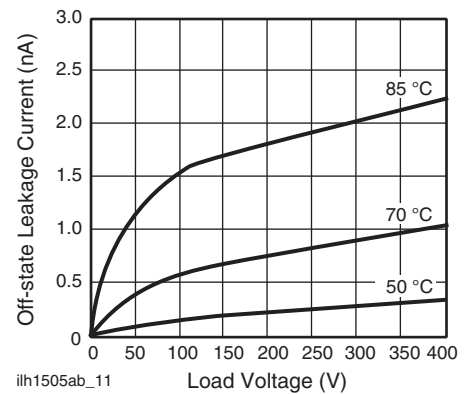

ih1505ab_11

Fig. 12 - Leakage Current vs. Applied Voltage at Elevated Temperatures

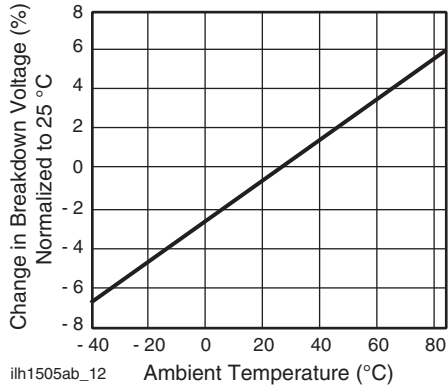


Fig. 13 - Switch Breakdown Voltage vs. Temperature

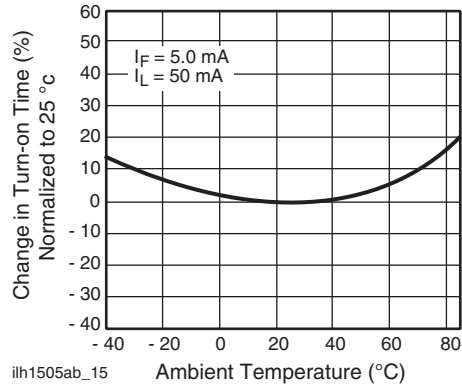


Fig. 16 - Turn-on Time vs. Temperature

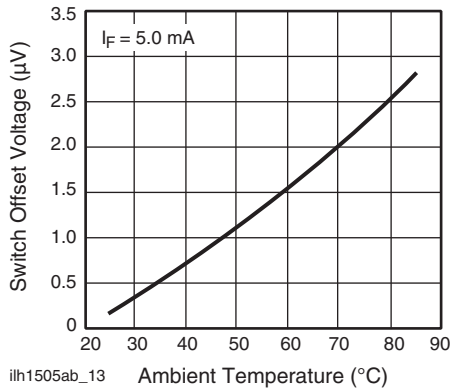


Fig. 14 - Switch Offset Voltage vs. Temperature

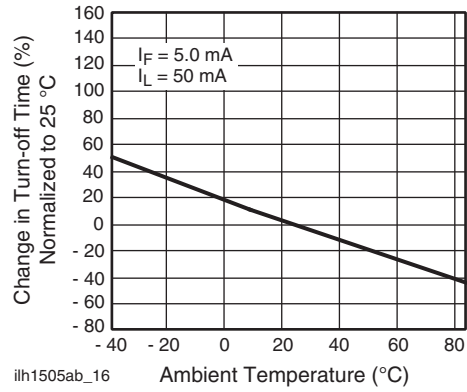


Fig. 17 - Turn-off Time vs. Temperature

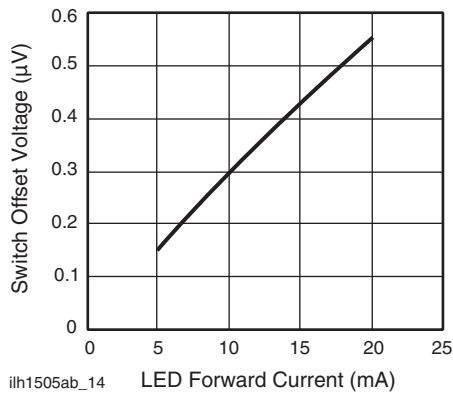


Fig. 15 - Switch Offset Voltage vs. LED Current

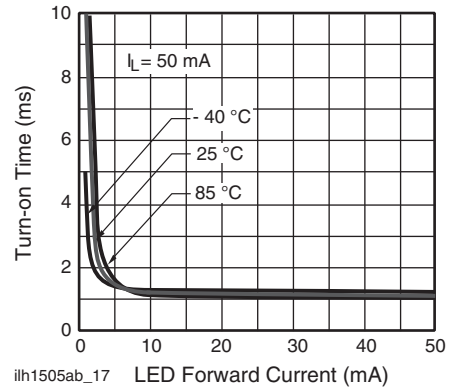


Fig. 18 - Turn-on Time vs. LED Current



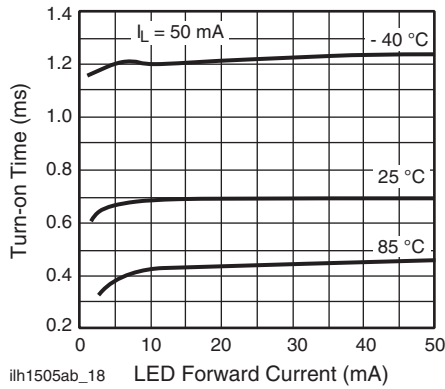


Fig. 19 - Turn-off Time vs. LED Current

PACKAGE DIMENSIONS in millimeters

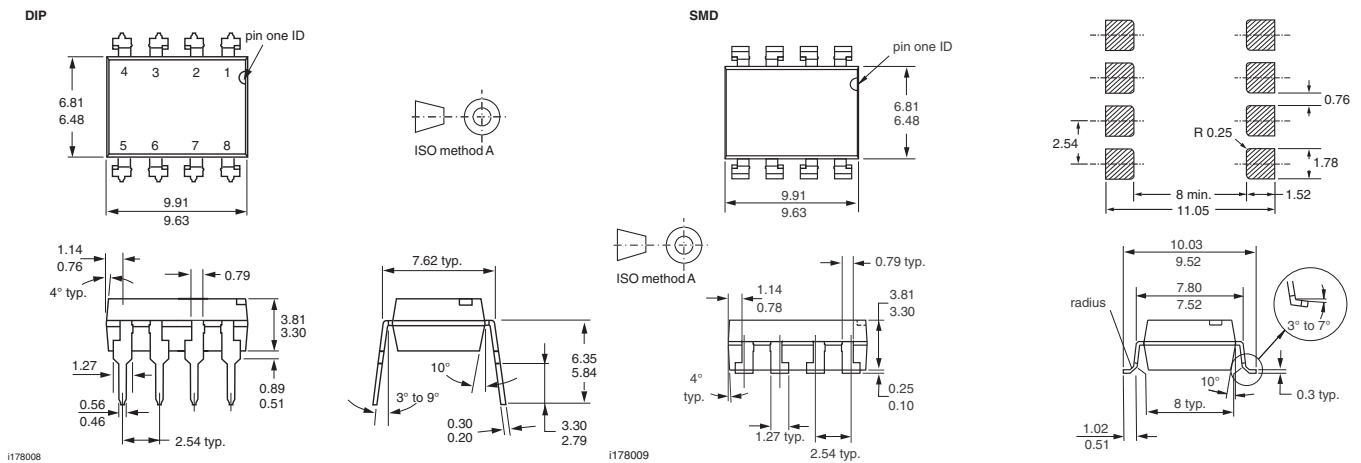

PACKAGE MARKING (example)



Note

- Tape and reel suffix (TR) is not part of the package marking.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru