
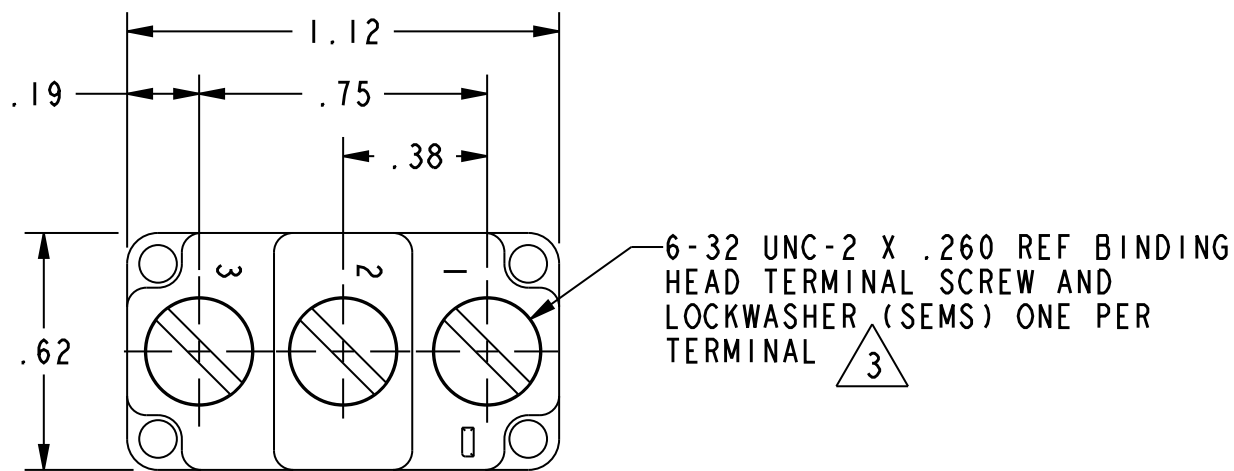
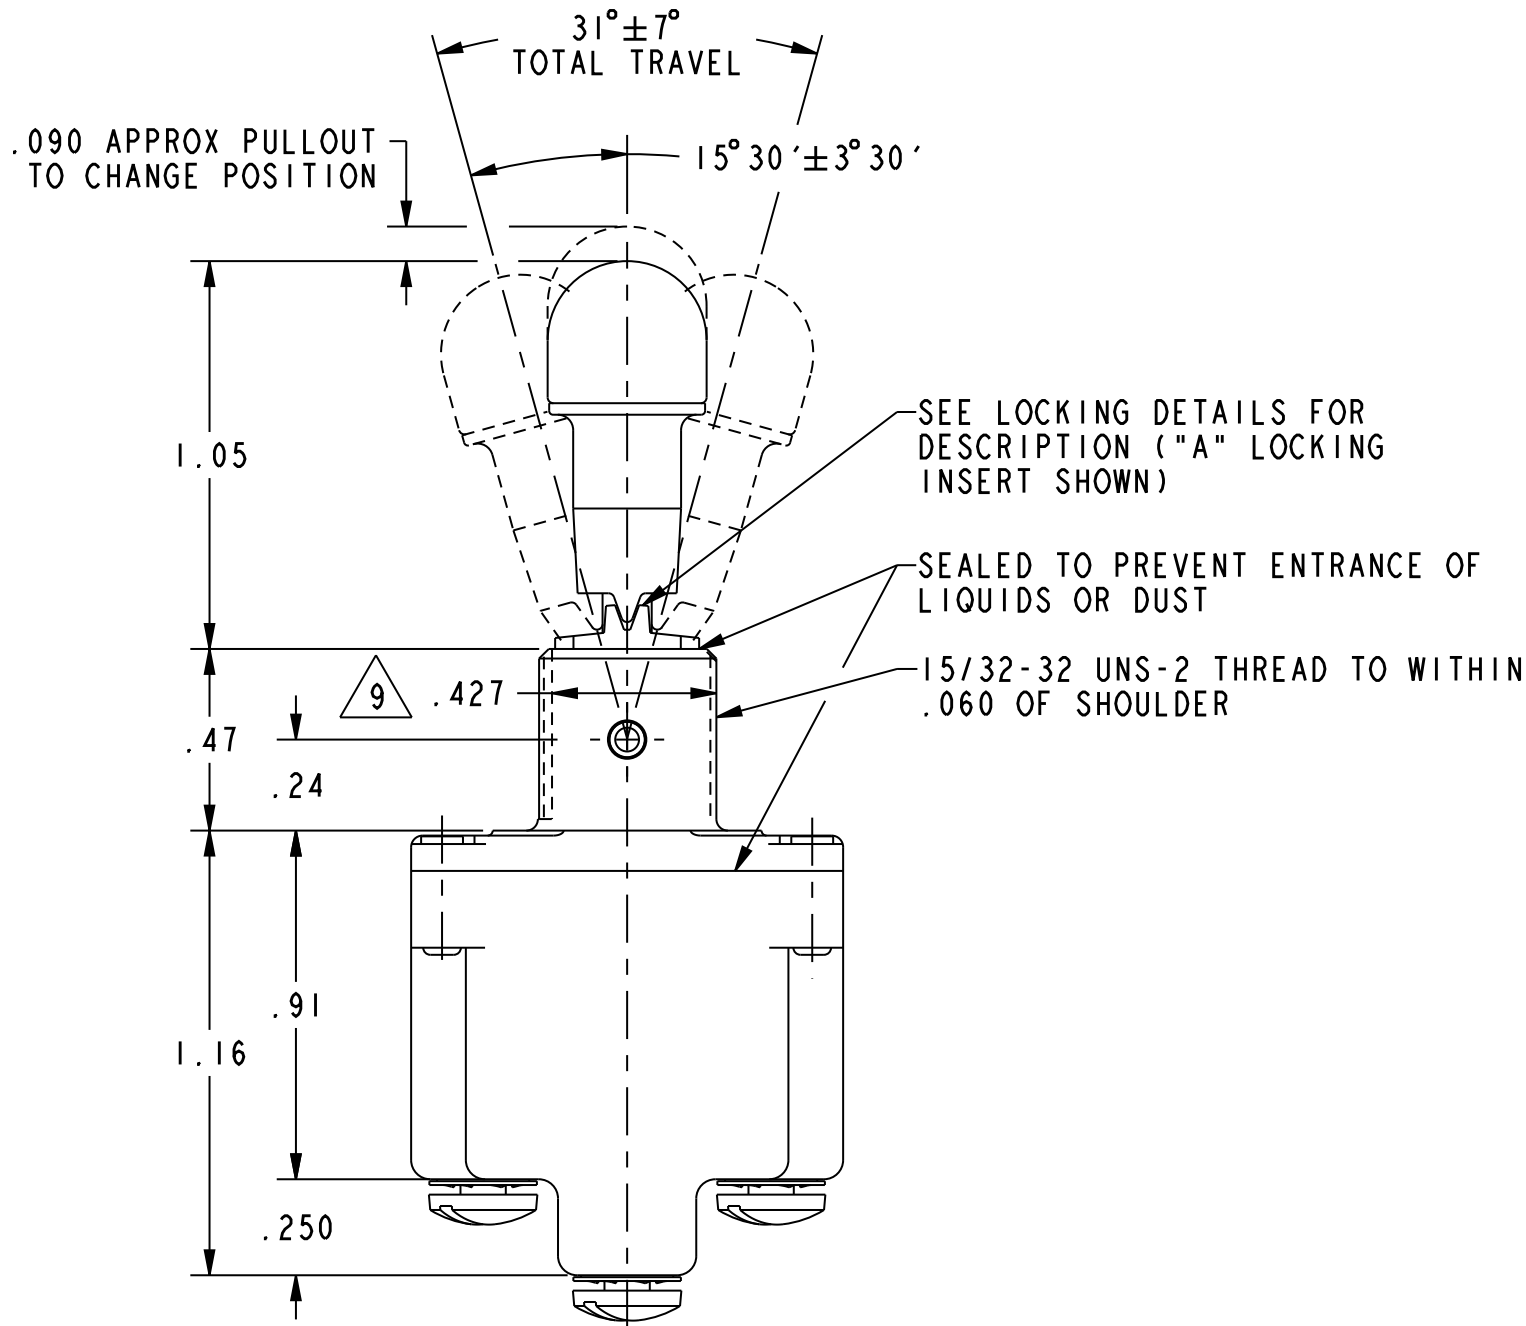



HONEYWELL
PART NUMBER
SEE CHART

REV	DOCUMENT	CHANGED BY	CHECK
32	0056412	SJK 10SEP09	CMH
REDRAWN WITHOUT CHANGE IN PRO-E			

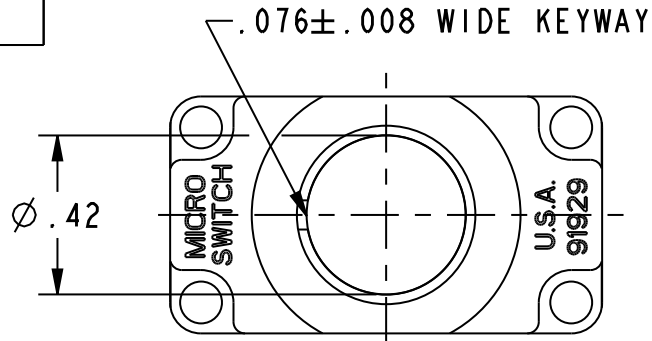

MILITARY STANDARD NUMBER 6	CATALOG LISTING 6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN			MILITARY RATING (AMPS)								
			KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
						DC VOLTS			AC VOLTS					
						28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
MS-24658-21	ITLI-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON	20 (REFER TO L191)	.75	.5	15	6	5	3	15	10
MS-24658-22	ITLI-2	D,F,G	OFF	NONE	ON									
MS-24658-23	ITLI-3	D,F,G	ON	NONE	ON									
MS-24658-24	ITLI-21	E,F,K,M	NONE	OFF	ON									
MS-24658-33	ITLI-31	E,F,K,M	NONE	ON	ON									
MS-24658-29	ITLI-4	F	MOM OFF	NONE	ON	15 (REFER TO L192)	.75	.5	15	6	4	2	10	7
MS-24658-31	ITLI-5	E,F,K,L,M,N	MOM ON	OFF	ON									
MS-24658-30	ITLI-6	F	MOM ON	NONE	OFF									
MS-24658-27	ITLI-7	E,L,N	MOM ON	OFF	MOM ON									
MS-24658-26	ITLI-8	F	MOM ON	NONE	ON									
MS-24658-32	ITLI-51	E	NONE	ON	MOM ON									
MS-24658-28	ITLI-61	E	MOM ON	OFF	NONE									

"A" 5 LOCKED IN THREE POSITIONS	"B" 5 LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" 5 LOCKED OUT OF CENTER POSITION	"E" 5 LOCKED IN CENTER POSITION	"F" 5 LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" 5 LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" 5 LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" 5 LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" 5 LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" 5 LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" 5 LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" 5 LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" 5 LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

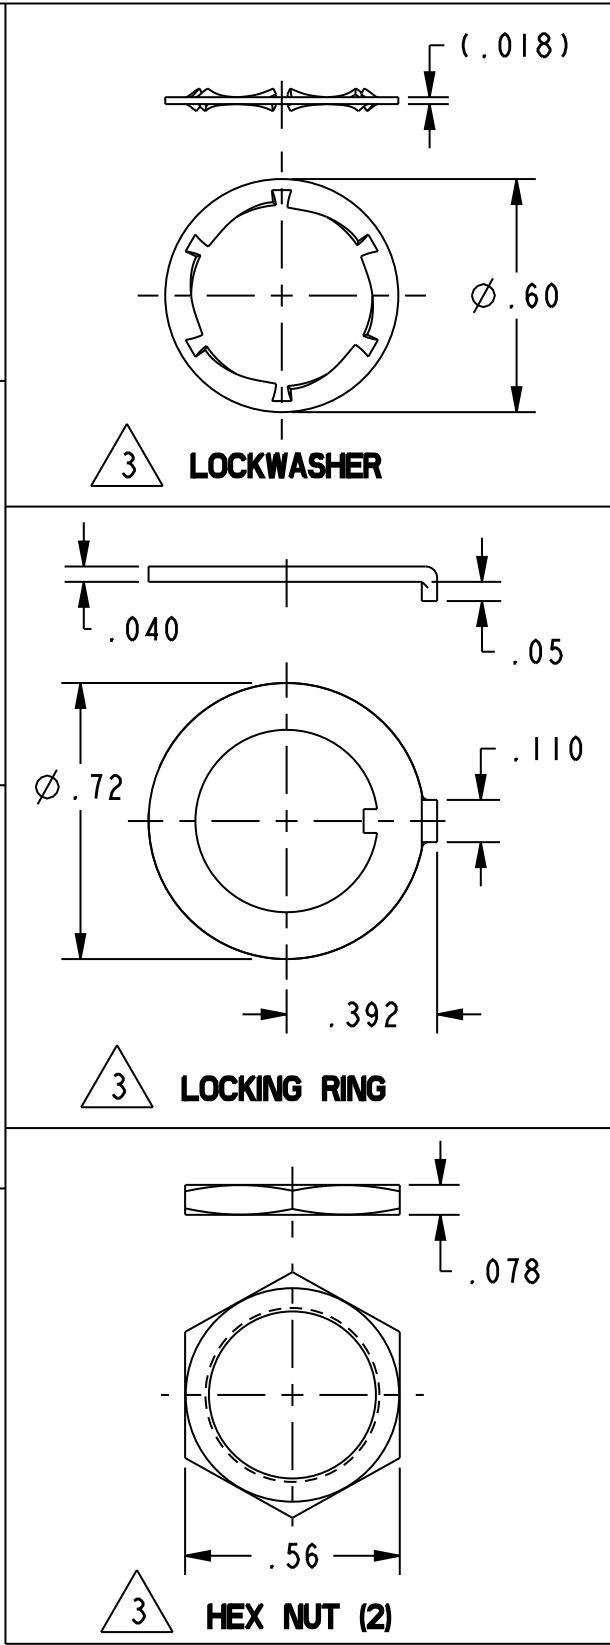

- NOTES:
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD.
 - 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND MS NUMBER MARKED ON SIDE OF SWITCH.
 - 3 - FURNISHED UNASSEMBLED.
 - 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7.
 - 5 - KEYWAY SHOWN ON LEFT SIDE.
 - 6 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS.
 - 7 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS.
 - 8 - THESE SWITCHES ARE QUALIFIED UNDER MIL-S-3950.
 - 9 - FROM BOTTOM OF KEYWAY TO MAJOR DIA. OF 15/32 THREAD.

15A-125, <u>250</u> OR 277VAC 1/2 HP-125VAC; 1HP- <u>250</u> , 277VAC 5A-125VAC "L" CODE L191	CE UL
10A-125, <u>250</u> OR 277VAC 1/4HP-125VAC; 1/2HP- <u>250</u> , 277VAC 3A-125VAC "L" CODE L192	CE UL

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	JAF	28JUN94	Honeywell			
NO PLACES .X ± .03 ONE PLACE .XX ± .015 TWO PLACE .XXX ± .005 THREE PLACE .X ± .005 ANGLES X ± .005		CHECK	-	-				
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			TITLE SWITCH - TOGGLE			
THIRD ANGLE PROJECTION		Pro/ENGINEER 3D			SIZE	TYPE	CAGE CODE	DRAWING NAME
					C	I	-	ITLI SERIES CHART 2 32
					SCALE	2:1	WEIGHT: .08 LBS. APPROX	SHEET 1 OF 1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru