




P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	22FEB2018	RS	AS

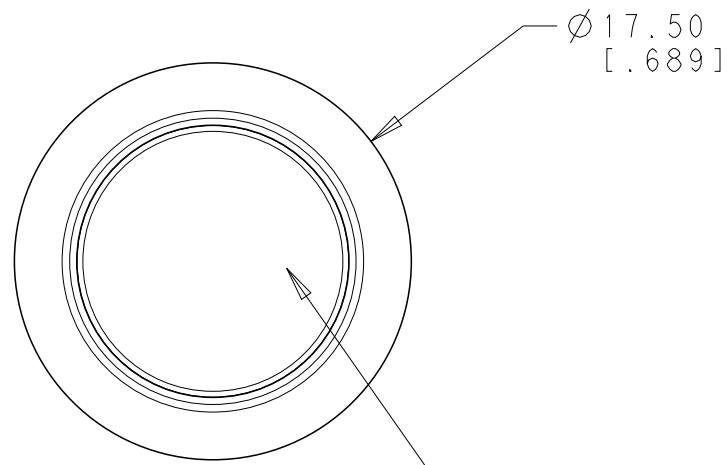


—CAP COLOR: SEE TABLE

FLYING LEADS WITH
COMMON STRAIN RELIEF
OFF - (ON)

Model No.	POS. 1	POS. 2
		
PB6	OFF	MOM (ON)
CONNECTED TERMINALS	OPEN	CLOSE
SCHEMATIC		

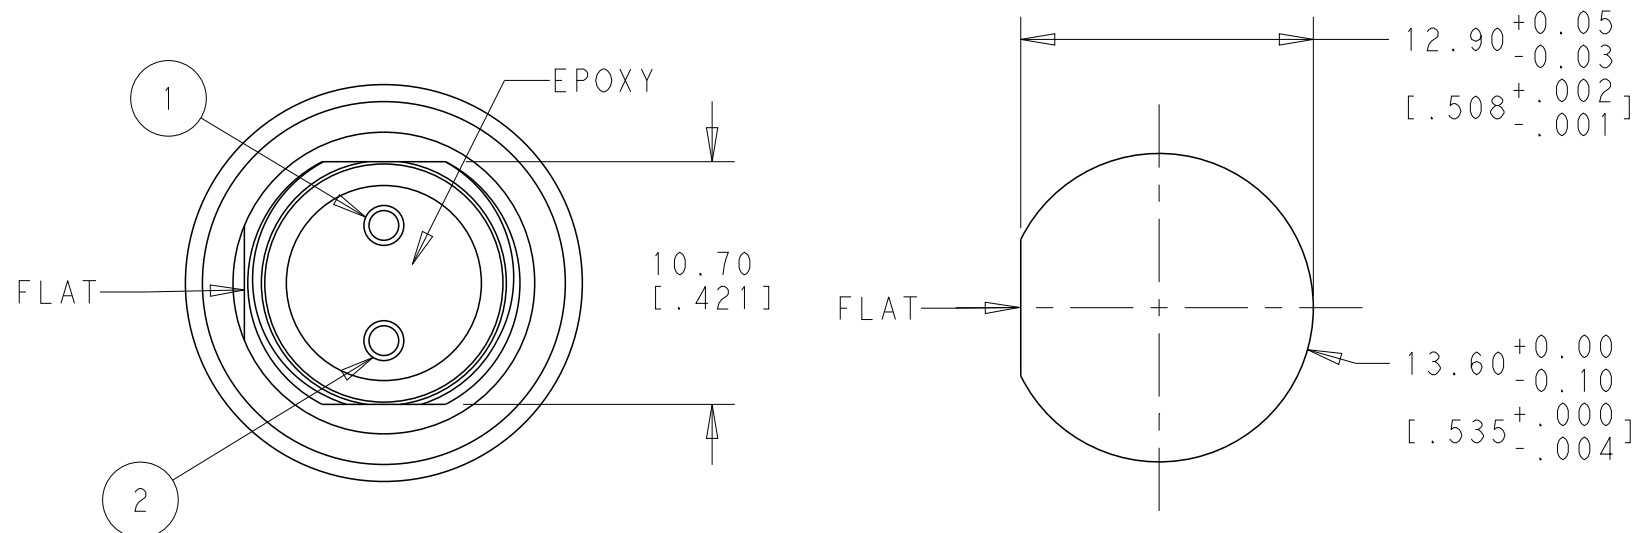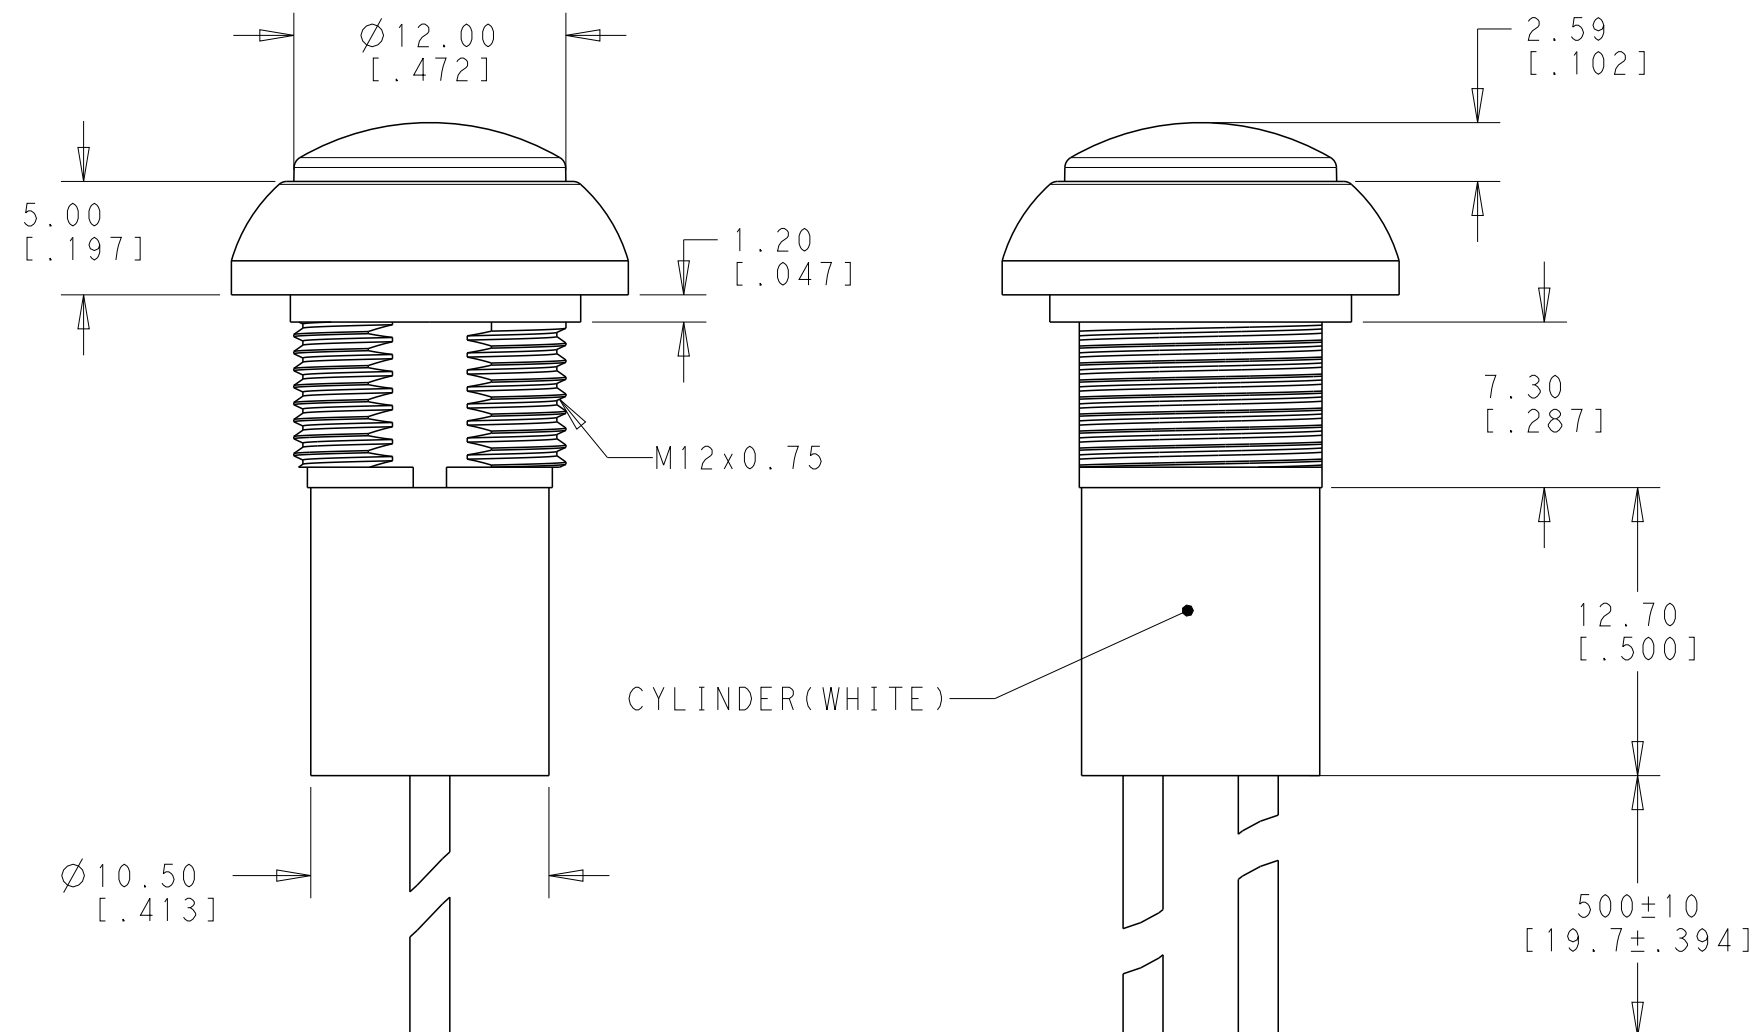

PANEL CUT-OUT
THICKNESS: 1.5mm~4.0mm
[.059~.157]

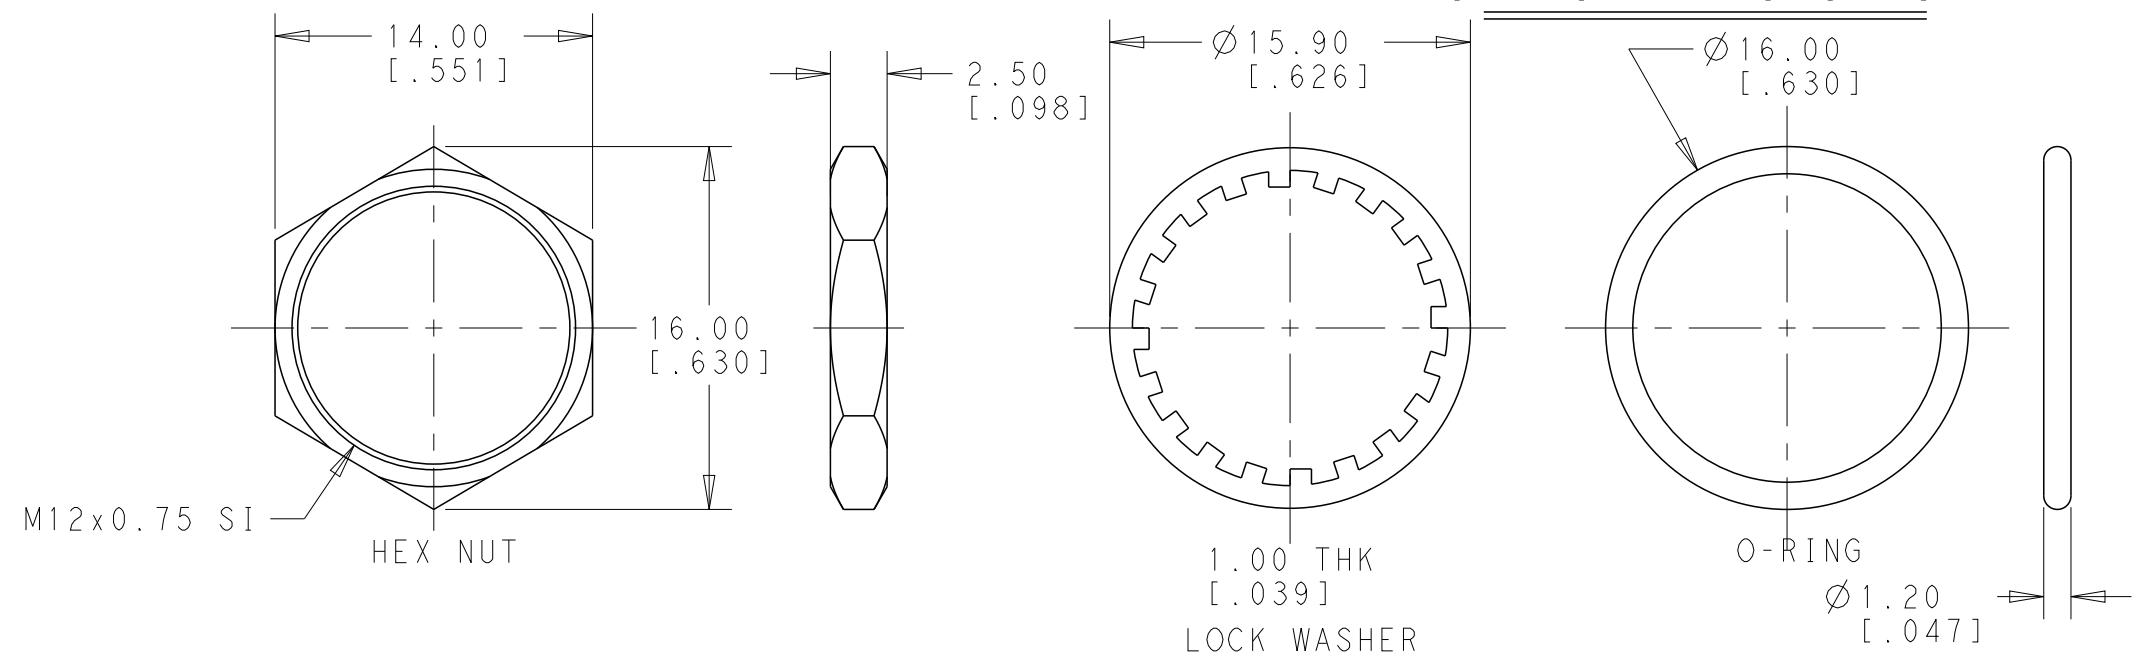

SPECIFICATIONS:

MAXIMUM CURRENT/VOLTAGE RATING WITH RESISTIVE LOAD:
400mA 32VAC, 200mA 50VDC, 125mA 125VAC

INITIAL CONTACT RESISTANCE: 100mΩ MAXIMUM, RESISTANCE
OF THE WIRE NOT INCLUDED.

INSULATION RESISTANCE: 1 GΩ MINIMUM AT 500 VDC

DIELECTRIC STRENGTH: 1,500 VAC RMS

CONTACT BOUNCE: 10ms

ELECTRICAL LIFE AT FULL LOAD: 500,000 CYCLES

MECHANICAL LIFE: 1,000,000 CYCLES

TOTAL TRAVEL: 1.5 (.059)

ACTUATION FORCE: 3 TO 6N

OPERATING TEMPERATURE: -30° TO 85° C

DEGREE OF PROTECTION: IP68, 1 HOUR @ 1 METER

TORQUE: 0.5N·m MAXIMUM APPLIED TO NUT

PACKAGING:

PACKAGING:
SWITCHES ARE BUNDLED. HARDWARE IS NOT ASSEMBLED TO THE SWITCH.

COMPLIANCE:

ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(RoHS)

SOLDER PROCESSING:

MANUAL SOLDERING: SOLDER IRON, 30 WATTS, CONTROLLED AT 350° C.
APPROXIMATELY 5 SECONDS WHILE APPLYING SOLDER.

1. HARDWARE IS SHIPPED UNASSEMBLED.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22FEB2018 RAVI.S		NO. DESCRIPTION WIRE COLOR	
DIMENSIONS: mm [INCHES]		CHG 22FEB2018 ALEXANDER SHARPE		TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 22FEB2018 ALEXANDER SHARPE		NAME	
		PRODUCT SPEC		SWITCH, PUSHBUTTON, ROUND CAP	
0 PLC ±- 1 PLC ±0.4[.016] 2 PLC ±0.25[.010] 3 PLC ±- 4 PLC ±- ANGLES ±5°		APPLICATION SPEC		NO LED, FLYING LEADS WITH COMMON STRAIN RELIEF, SEALED, OFF-(ON)	
MATERIAL		WEIGHT		SIZE	RESTRICTED TO
FINISH		-		CAGE CODE	
-		-		DRAWING NO	
-		-		A200779	
-		-		C-2329361	
CUSTOMER DRAWING				SCALE	REV
				5:1	1 OF 2
					1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

©

COPYRIGHT copyright.dB

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

SINGLE POLE	OFF-(ON) MOMENTARY	FLYING LEADS WITH COMMON STRAIN RELIEF	ROUND, SHINY BLUE	N/A	PB6B2RS7M1CAL00S500	2329361-5
			ROUND, SHINY GREEN	N/A	PB6B2RS6M1CAL00S500	2329361-4
			ROUND, SHINY YELLOW	N/A	PB6B2RS5M1CAL00S500	2329361-3
			ROUND, SHINY RED	N/A	PB6B2RS3M1CAL00S500	2329361-2
			ROUND, SHINY BLACK	N/A	PB6B2RS2M1CAL00S500	2329361-1
POLE	THROW	TERMINAL TYPE	CAP TYPE & COLOR	LED COLOR	TE DESCRIPTIVE PART NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm[INCHES]

0 PLC ±
1 PLC ±0.4[.016]
2 PLC ±0.25[.010]
3 PLC ±
4 PLC ±
ANGLES ±°
FINISH

-
-

DWN 22FEB2018
RAVLS
CHK 22FEB2018
ALEXANDER SHARPE
APVD 22FEB2018
ALEXANDER SHARPE

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
SWITCH, PUSHBUTTON, ROUND CAP
NO LED, FLYING LEADS WITH COMMON
STRAIN RELIEF, SEALED, OFF-(ON)

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2329361

RESTRICTED TO

SCALE 5:1

SHEET 2 OF 2

REV 1

1471-9 (3/13)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru