




- Au-plated End Connectors with Solid Brass Pins on 0.100 [2.54] Centers
- Available Single-ended (Series 156), Double-ended (Series 157), or Bare-ended (Series 152)
- Reliable, Electronically-tested Solder Connections
- Easy Identification and Tracing with 10-color Cable

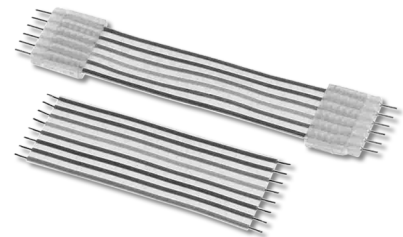

- **HOUSING:** natural UL 94-HB Nylon 6/6
- **HEADER PINS:** Brass, 1/2-hard
- **PIN PLATING:** 10μ [0.25μ] min. Au per MIL-G-45204 over 50μ [1.27μ] min. Ni per SAE AMS-QQ-N-290B
- **CABLE INSULATION:** UL Style 1061 Polyvinyl Chloride (PVC), semi-rigid
- **LAMINATE:** clear PVC, Self-extinguishing
- **CONDUCTORS:** 26-AWG, 7/34-strand, tinned Cu per ASTM B 33 Series 152 Conductors are not pre-tinned. Consult factory for pre-tinned, bare-ended jumpers
- **CABLE CURRENT RATING:** 1 amp at 10°C [50°F] above ambient
- **CABLE VOLTAGE RATING:** 300V
- **CABLE TEMPERATURE RATING:** 176°F [80°C]

XX-XXX-XXX

Series
 156 = Single-ended*
 157 = Double-ended*
 152 = Bare-ended


Length "L" (inches)
(See Table)

No. of Conductors
(4 thru 22)

* Not Available in RoHS

- **SUGGESTED PCB HOLE SIZE:** 0.033 ± 0.002 [0.86 ± 0.05] dia.

No. of Conductors	Min. Insulation Length
4 thru 8	1.000 [25.40]
9 and 10	1.250 [31.75]
11 thru 22	1.500 [38.10]

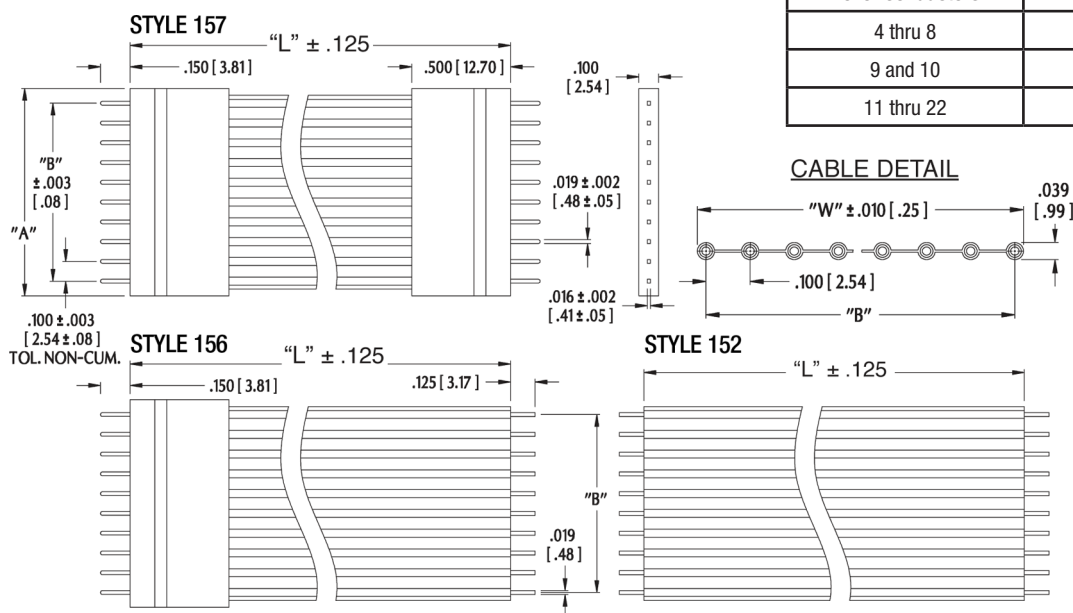

$$\text{"A"} = (\text{NO. OF CONDUCTORS} \times 0.100 [2.54]) + 0.040 [1.02]$$

"B" = (NO. OF CONDUCTORS - 1) x 0.100 [2.54]

"W" = (NO. OF CONDUCTORS x 0.100 [2.54]) - 0.020 [0.51]

ALL TOLERANCES: ± 0.005 [0.13] UNLESS OTHERWISE SPECIFIED
FOR PRE-TINNED, BARE-ENDED JUMPERS, CONSULT FACTORY
CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

**PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE
CONSIDERED UNCONTROLLED**



2609 Bartram Road • Bristol, PA 19007-6810 USA
TEL 215-781-9956 • FAX 215-781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



11014
Rev. 10.1
1 of 1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru