
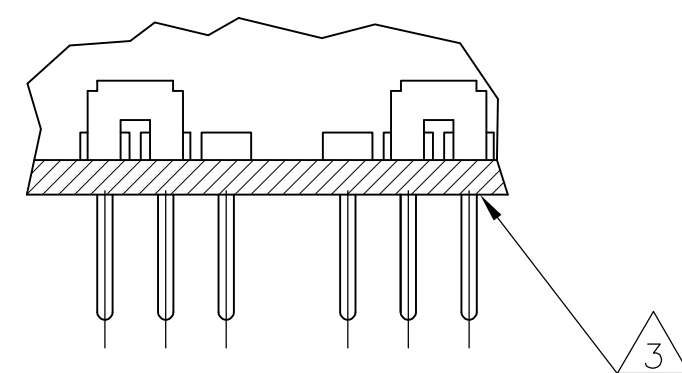
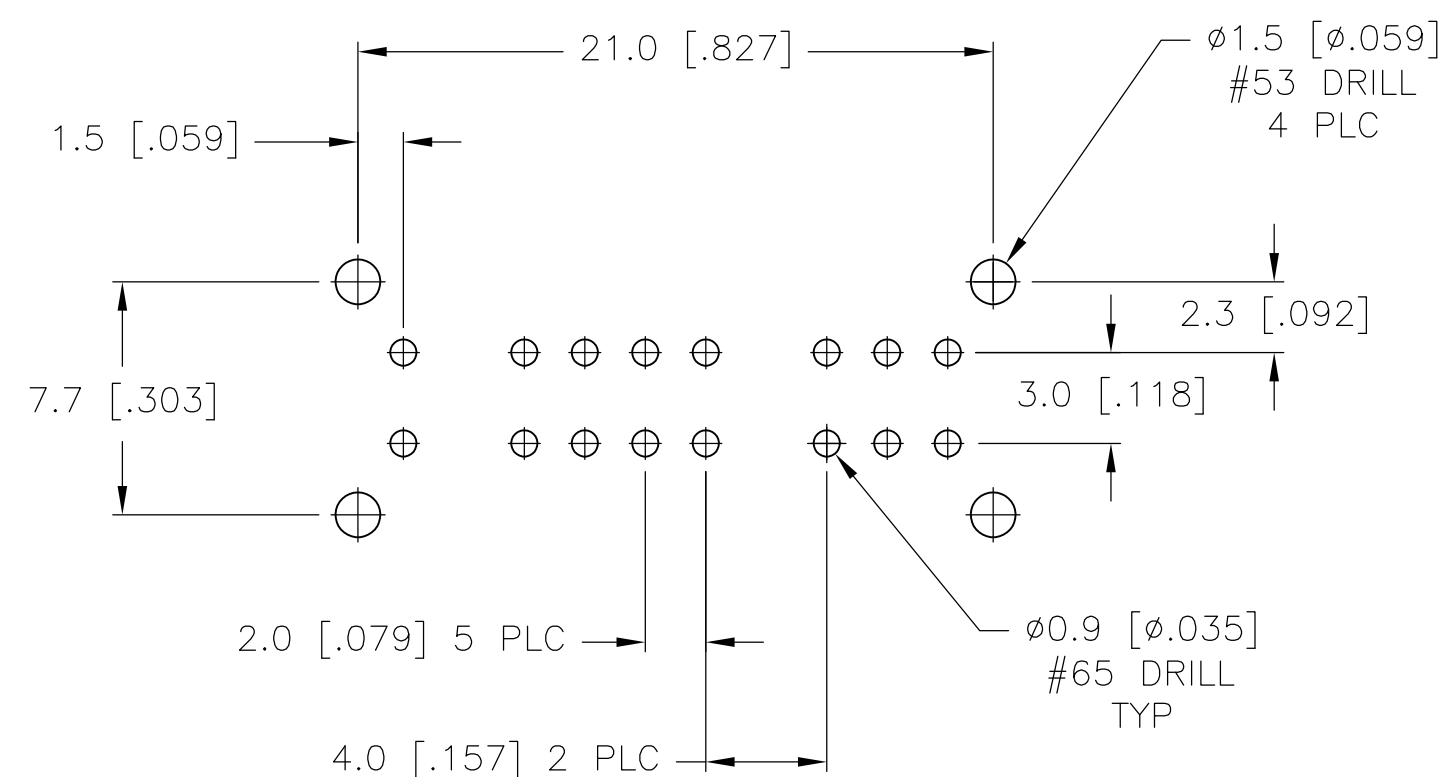
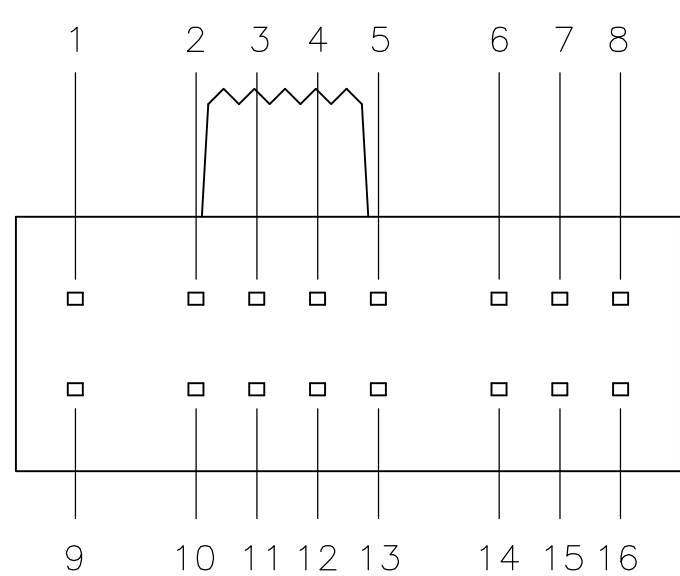
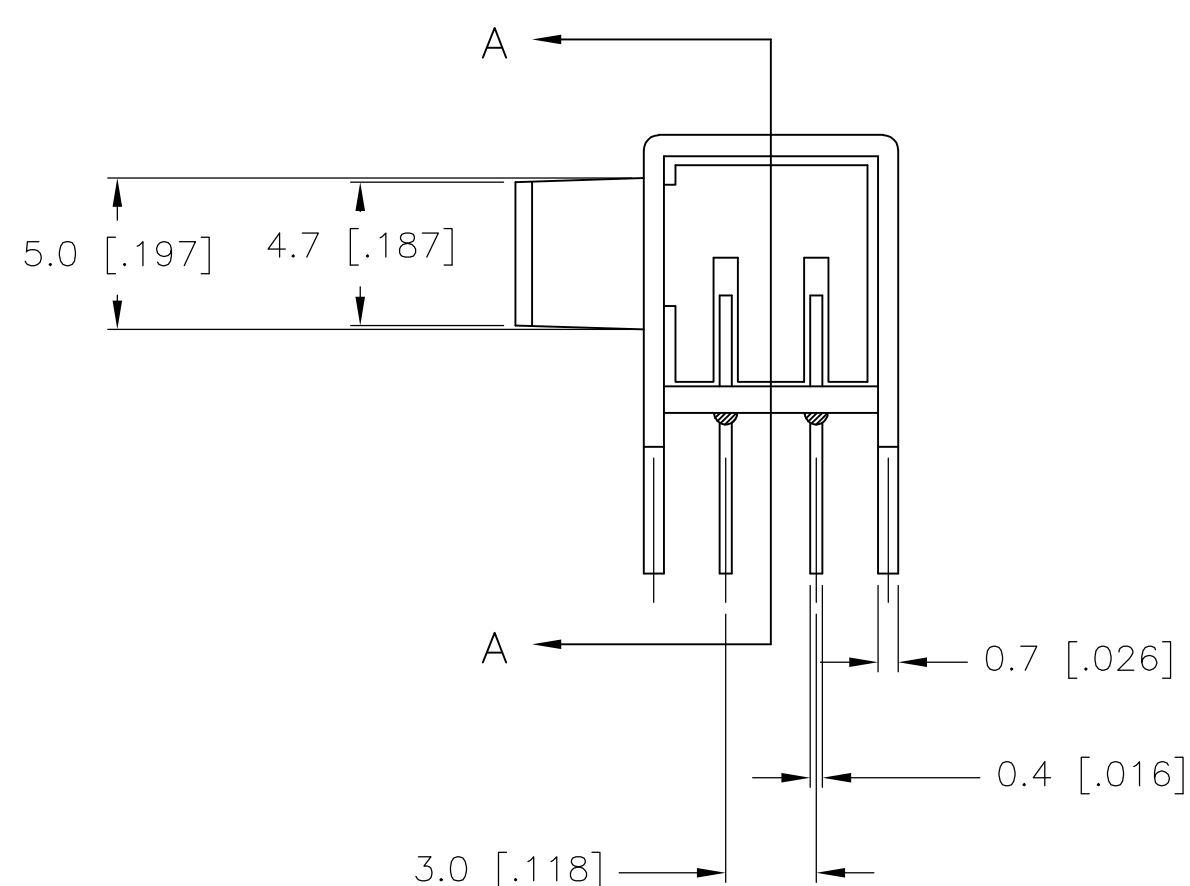
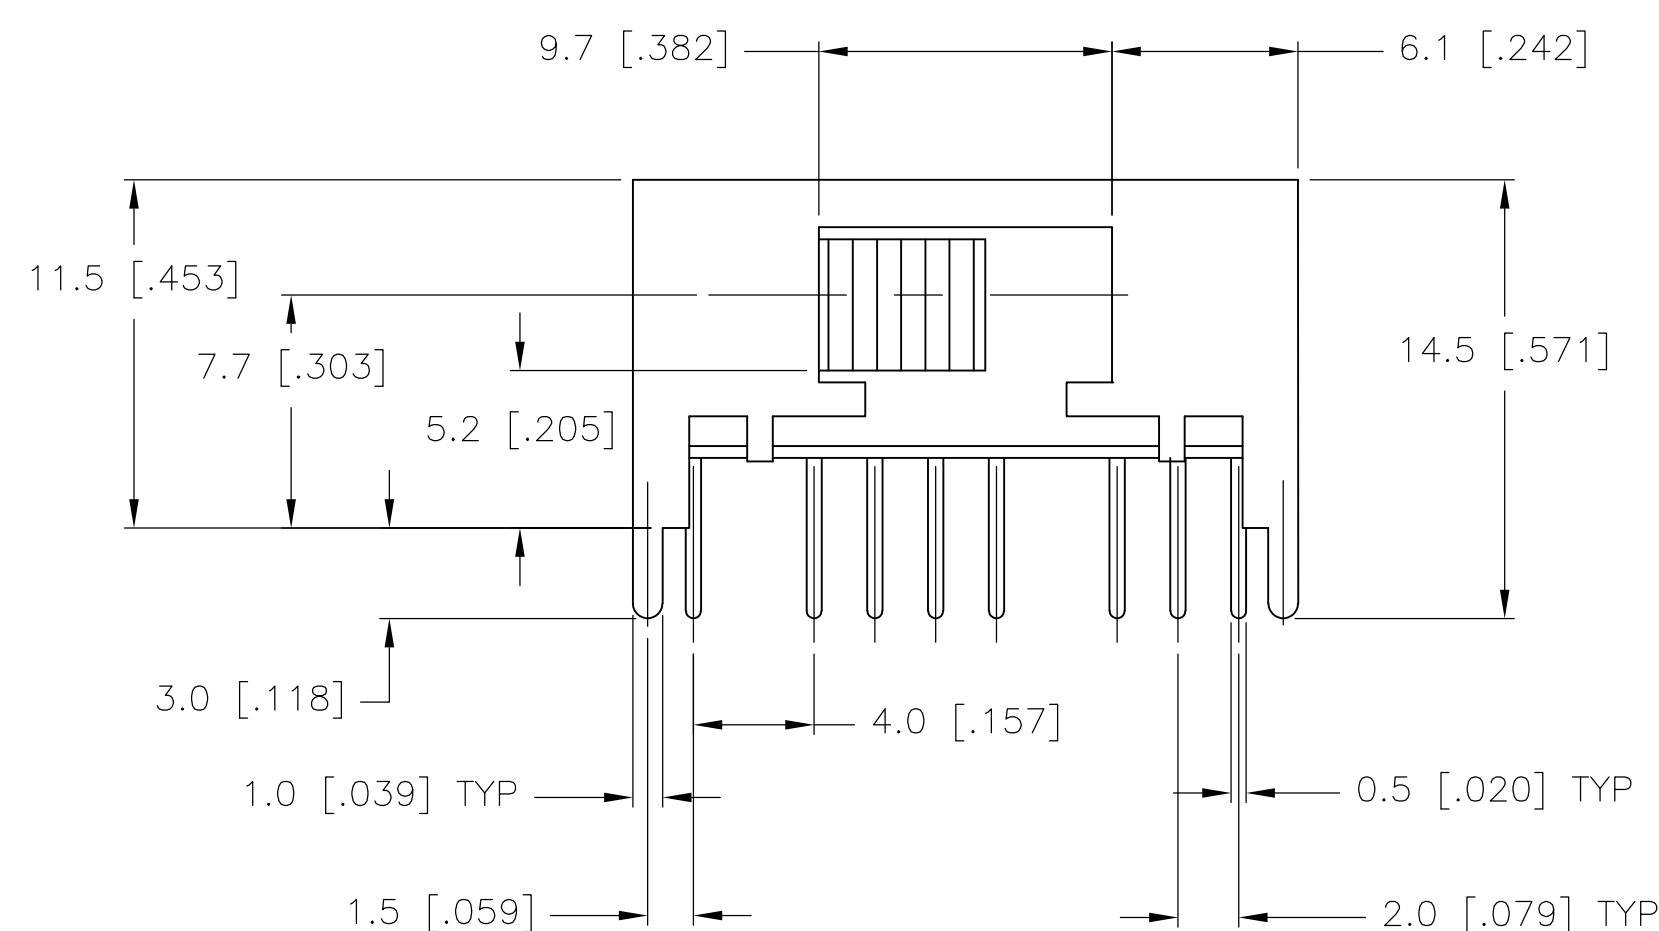


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-10-008611	24APR10	HMR	NE

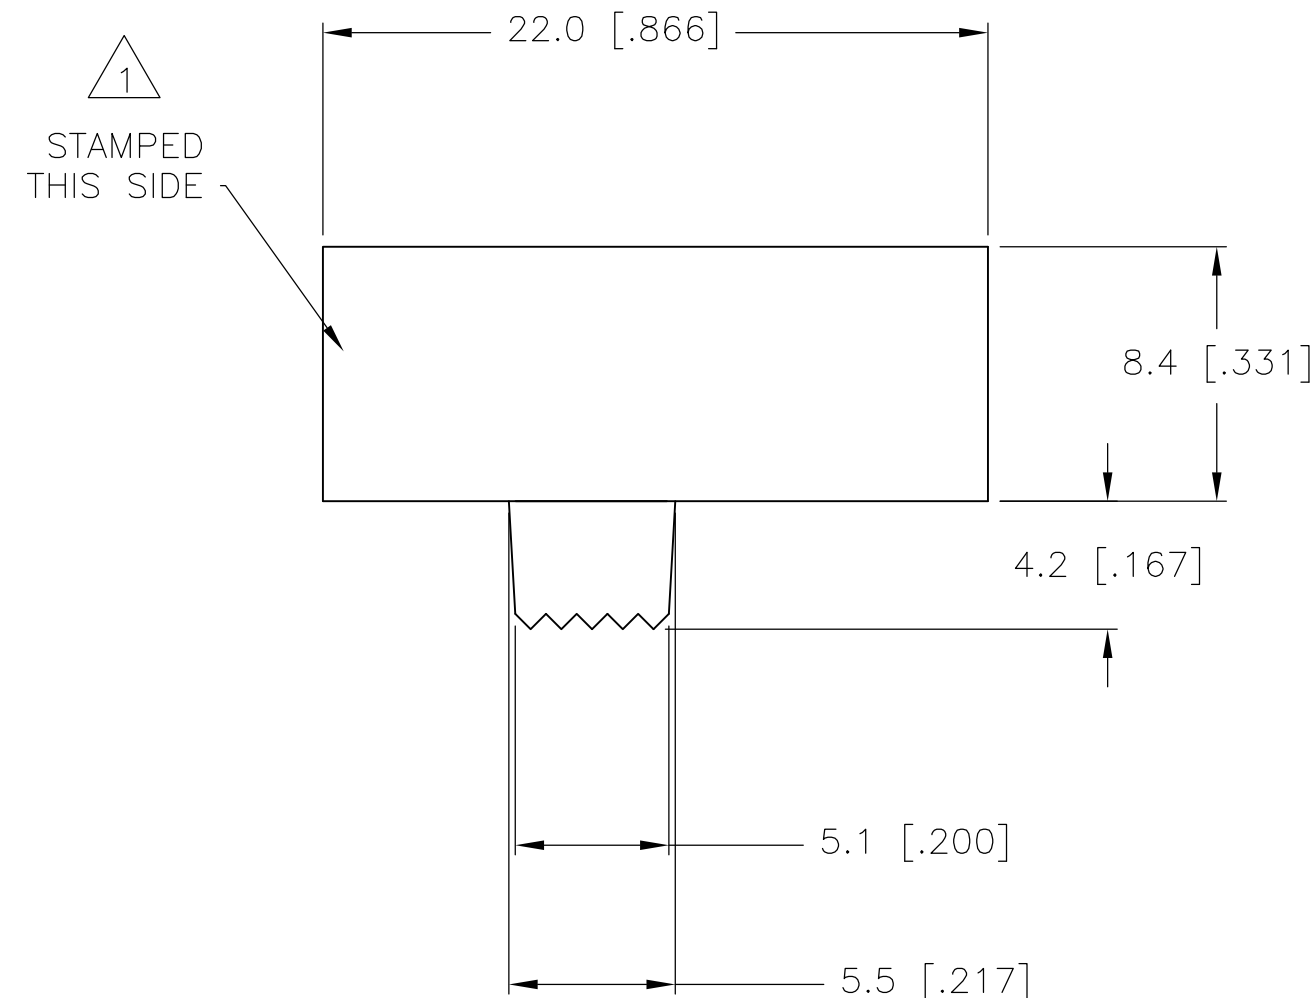

SECTION A-A

SPECIFICATIONS
MAKE-BEFORE-BREAK

MATERIALS:
 ACTUATOR— POM, UL94HB BLACK
 TERMINAL BOARD— PHENOLIC LAMINATED SHEET, UL94HB, NATURAL
 FRAME— STEEL, NICKEL PLATE
 TERMINAL/FIXED CONTACT— COPPER ALLOY, GOLD OR SILVER OVER NICKEL PLATE
 MOVING CONTACT— COPPER ALLOY, GOLD OR SILVER OVER NICKEL PLATE
 DETENT BALL— STEEL
 COIL SPRING— GALVANIZED SPRING WIRE
 SEAL— EPOXY

ELECTRICAL:
CONTACT RATING— .4VA@20VDC OR PEAK AC (GOLD); 300mA@125V AC (SILVER)
INITIAL CONTACT RESISTANCE— 30 milliohm max.
FINAL CONTACT RESISTANCE— 100 milliohm max. (AFTER TEST)
INSULATION RESISTANCE— 1,000 Megohms min.
DIELECTRIC STRENGTH— 500V RMS@SEA LEVEL
LIFE EXPECTANCY— 15,000 CYCLES MIN.


MECHANICAL:
ACTUATION FORCE- 600+/-300 GRAMS
TRAVEL- 2.0 +/-0.50 (0.079 +/-0.020)

ENVIRONMENTAL:
OPERATING TEMPERATURE- -20 TO +85 DEGREES C
STORAGE TEMPERATURE- -40 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT PER 109-202, CONDITION B
SOLDERABILITY PER EIA-364-52, CLASS 2, CATEGORY 1, 95% MIN COVERAGE

NOTES:

1. COUNTRY OF ORIGIN AND TE LOGO LOCATED APPROXIMATELY AS SHOWN
2. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
3. ANTI SOLDER WICK SEAL AT TERMINAL TO BOARD INTERFACE
4. ALL PERFORMANCE TESTING WAS DONE IN ACCORDANCE TO TYCO SPECIFICATION 102-2469

1825268-2	MSS4300RG04	GOLD	1 2 3 4 5 6 7 8 9 10 11 12 13 14 5 TO 6 9 TO 10 13 TO 14	2 TO 3 4 5 6 7 8 9 10 11 12 13 14 6 TO 7 9 TO 10 14 TO 15	2 TO 3 4 5 6 7 8 9 10 11 12 13 14 7 TO 8 10 TO 11 15 TO 16
1825268-1	MSS4300R04	SILVER	1 2 3 4 5 6 7 8 9 10 11 12 13 14 5 TO 6 9 TO 10 13 TO 14	2 TO 3 4 5 6 7 8 9 10 11 12 13 14 6 TO 7 9 TO 10 14 TO 15	2 TO 3 4 5 6 7 8 9 10 11 12 13 14 7 TO 8 10 TO 11 15 TO 16
TE PART NO.	T&B PART NO.	PLATING	 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
TERMINALS CONNECTED WHEN SLIDE IS IN POSITION SHOWN.					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG R BROWN	210EC05	 Tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK M SARVER	210EC05		
DIMENSIONS: UNLESS TOLERANCES UNLESS OTHERWISE SPECIFIED: mm		APP'D M SARVER	210EC05	NAME	
		PRODUCT SPEC		SLIDE SWITCH, MSS 4300R SERIES	
		APPLICATION SPEC		—	
MATERIAL		WEIGHT		SIZE	CAGE CODE
FINISH		—		DRAWING NO	
				RESTRICTED TO	
		CUSTOMER DRAWING		A1 00779 C= 1825268	
				SCALE	SHEET
				4:1	1 of 1
				REV	A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru