

# FQP50N06

## 60V N-Channel MOSFET



### General Description

These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for low voltage applications such as automotive, DC/DC converters, and high efficiency switching for power management in portable and battery operated products.

### Features

- 50A, 60V,  $R_{DS(on)} = 0.022\Omega$  @  $V_{GS} = 10V$
- Low gate charge ( typical 31 nC)
- Low  $C_{rss}$  ( typical 65 pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- 175°C maximum junction temperature rating



### Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter                                                                                             | FQP50N06    | Units |
|----------------|-------------------------------------------------------------------------------------------------------|-------------|-------|
| $V_{DSS}$      | Drain-Source Voltage                                                                                  | 60          | V     |
| $I_D$          | Drain Current - Continuous ( $T_C = 25^\circ\text{C}$ )<br>- Continuous ( $T_C = 100^\circ\text{C}$ ) | 50          | A     |
|                |                                                                                                       | 35.4        | A     |
| $I_{DM}$       | Drain Current - Pulsed (Note 1)                                                                       | 200         | A     |
| $V_{GSS}$      | Gate-Source Voltage                                                                                   | $\pm 25$    | V     |
| $E_{AS}$       | Single Pulsed Avalanche Energy (Note 2)                                                               | 490         | mJ    |
| $I_{AR}$       | Avalanche Current (Note 1)                                                                            | 50          | A     |
| $E_{AR}$       | Repetitive Avalanche Energy (Note 1)                                                                  | 12          | mJ    |
| dv/dt          | Peak Diode Recovery dv/dt (Note 3)                                                                    | 7.0         | V/ns  |
| $P_D$          | Power Dissipation ( $T_C = 25^\circ\text{C}$ )<br>- Derate above $25^\circ\text{C}$                   | 120         | W     |
|                |                                                                                                       | 0.8         | W/°C  |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                                               | -55 to +175 | °C    |
| $T_L$          | Maximum lead temperature for soldering purposes,<br>1/8" from case for 5 seconds                      | 300         | °C    |

### Thermal Characteristics

| Symbol          | Parameter                               | Typ | Max  | Units |
|-----------------|-----------------------------------------|-----|------|-------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case    | --  | 1.24 | °C/W  |
| $R_{\theta CS}$ | Thermal Resistance, Case-to-Sink        | 0.5 | --   | °C/W  |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient | --  | 62.5 | °C/W  |

**Electrical Characteristics** $T_C = 25^\circ\text{C}$  unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--------|-----------|-----------------|-----|-----|-----|-------|
|--------|-----------|-----------------|-----|-----|-----|-------|

**Off Characteristics**

|                                |                                           |                                                                   |    |      |      |                     |
|--------------------------------|-------------------------------------------|-------------------------------------------------------------------|----|------|------|---------------------|
| $BV_{DSS}$                     | Drain-Source Breakdown Voltage            | $V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$               | 60 | --   | --   | V                   |
| $\Delta BV_{DSS} / \Delta T_J$ | Breakdown Voltage Temperature Coefficient | $I_D = 250\text{ }\mu\text{A}$ , Referenced to $25^\circ\text{C}$ | -- | 0.06 | --   | V/ $^\circ\text{C}$ |
| $I_{DSS}$                      | Zero Gate Voltage Drain Current           | $V_{DS} = 60\text{ V}, V_{GS} = 0\text{ V}$                       | -- | --   | 1    | $\mu\text{A}$       |
|                                |                                           | $V_{DS} = 48\text{ V}, T_C = 150^\circ\text{C}$                   | -- | --   | 10   | $\mu\text{A}$       |
| $I_{GSSF}$                     | Gate-Body Leakage Current, Forward        | $V_{GS} = 25\text{ V}, V_{DS} = 0\text{ V}$                       | -- | --   | 100  | nA                  |
| $I_{GSSR}$                     | Gate-Body Leakage Current, Reverse        | $V_{GS} = -25\text{ V}, V_{DS} = 0\text{ V}$                      | -- | --   | -100 | nA                  |

**On Characteristics**

|              |                                   |                                                    |     |       |       |          |
|--------------|-----------------------------------|----------------------------------------------------|-----|-------|-------|----------|
| $V_{GS(th)}$ | Gate Threshold Voltage            | $V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$    | 2.0 | --    | 4.0   | V        |
| $R_{DS(on)}$ | Static Drain-Source On-Resistance | $V_{GS} = 10\text{ V}, I_D = 25\text{ A}$          | --  | 0.018 | 0.022 | $\Omega$ |
| $g_{FS}$     | Forward Transconductance          | $V_{DS} = 25\text{ V}, I_D = 25\text{ A}$ (Note 4) | --  | 22    | --    | S        |

**Dynamic Characteristics**

|           |                              |                                                                      |    |      |      |    |
|-----------|------------------------------|----------------------------------------------------------------------|----|------|------|----|
| $C_{iss}$ | Input Capacitance            | $V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V},$<br>$f = 1.0\text{ MHz}$ | -- | 1180 | 1540 | pF |
| $C_{oss}$ | Output Capacitance           |                                                                      | -- | 440  | 580  | pF |
| $C_{rss}$ | Reverse Transfer Capacitance |                                                                      | -- | 65   | 90   | pF |

**Switching Characteristics**

|              |                     |                                                                                           |    |     |     |    |
|--------------|---------------------|-------------------------------------------------------------------------------------------|----|-----|-----|----|
| $t_{d(on)}$  | Turn-On Delay Time  | $V_{DD} = 30\text{ V}, I_D = 25\text{ A},$<br>$R_G = 25\text{ }\Omega$<br><br>(Note 4, 5) | -- | 15  | 40  | ns |
| $t_r$        | Turn-On Rise Time   |                                                                                           | -- | 105 | 220 | ns |
| $t_{d(off)}$ | Turn-Off Delay Time |                                                                                           | -- | 60  | 130 | ns |
| $t_f$        | Turn-Off Fall Time  |                                                                                           | -- | 65  | 140 | ns |
| $Q_g$        | Total Gate Charge   | $V_{DS} = 48\text{ V}, I_D = 50\text{ A},$<br>$V_{GS} = 10\text{ V}$<br><br>(Note 4, 5)   | -- | 31  | 41  | nC |
| $Q_{gs}$     | Gate-Source Charge  |                                                                                           | -- | 8   | --  | nC |
| $Q_{gd}$     | Gate-Drain Charge   |                                                                                           | -- | 13  | --  | nC |

**Drain-Source Diode Characteristics and Maximum Ratings**

|                 |                                                       |                                               |    |    |     |    |
|-----------------|-------------------------------------------------------|-----------------------------------------------|----|----|-----|----|
| I <sub>S</sub>  | Maximum Continuous Drain-Source Diode Forward Current |                                               | -- | -- | 50  | A  |
| I <sub>SM</sub> | Maximum Pulsed Drain-Source Diode Forward Current     |                                               | -- | -- | 200 | A  |
| V <sub>SD</sub> | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = 50 A  | -- | -- | 1.5 | V  |
| t <sub>rr</sub> | Reverse Recovery Time                                 | V <sub>GS</sub> = 0 V, I <sub>S</sub> = 50 A, | -- | 52 | --  | ns |
| Q <sub>rr</sub> | Reverse Recovery Charge                               | dI <sub>F</sub> / dt = 100 A/μs (Note 4)      | -- | 75 | --  | nC |

**Notes:**

1. Repetitive Rating : Pulse width limited by maximum junction temperature
2.  $L = 230\text{ }\mu\text{H}$ ,  $I_{AS} = 50\text{ A}$ ,  $V_{DD} = 25\text{ V}$ ,  $R_G = 25\text{ }\Omega$ , Starting  $T_J = 25^\circ\text{C}$
3.  $I_{SD} \leq 50\text{ A}$ ,  $di/dt \leq 300\text{ A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse width  $\leq 300\text{ }\mu\text{s}$ , Duty cycle  $\leq 2\%$
5. Essentially independent of operating temperature

## Typical Characteristics

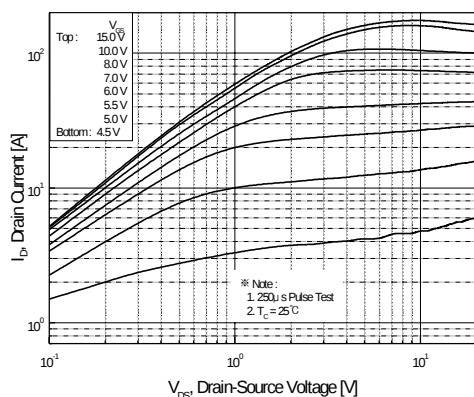


Figure 1. On-Region Characteristics



Figure 2. Transfer Characteristics

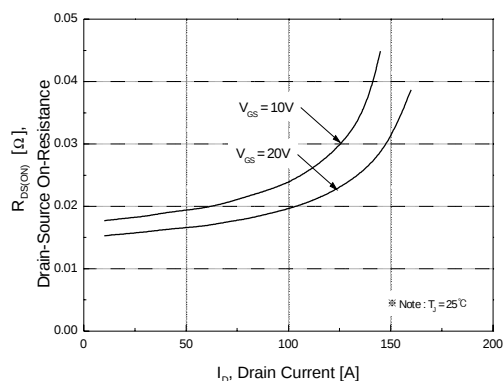


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage



Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

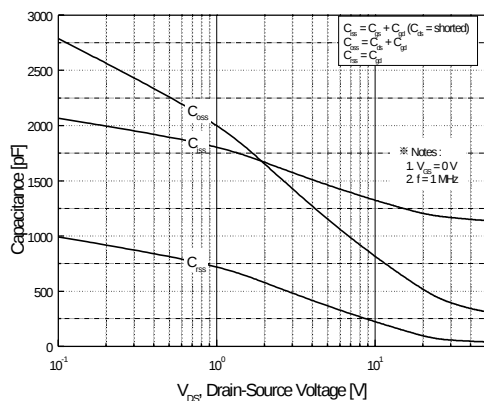


Figure 5. Capacitance Characteristics

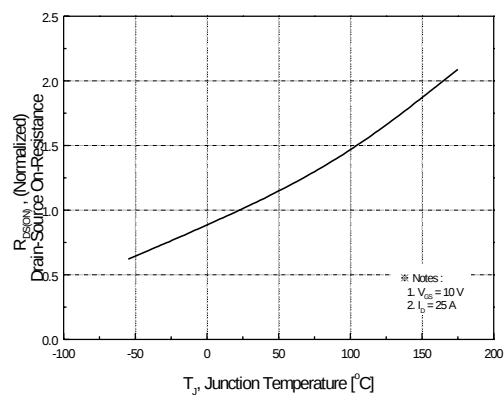


Figure 6. Gate Charge Characteristics


# Typical Characteristics (Continued)




**Figure 7. Breakdown Voltage Variation vs. Temperature**




**Figure 8. On-Resistance Variation vs. Temperature**

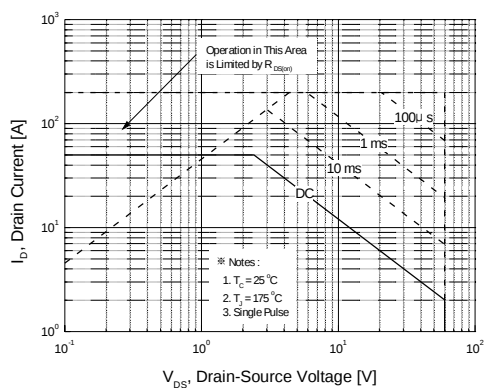

**Figure 9. Maximum Safe Operating Area**

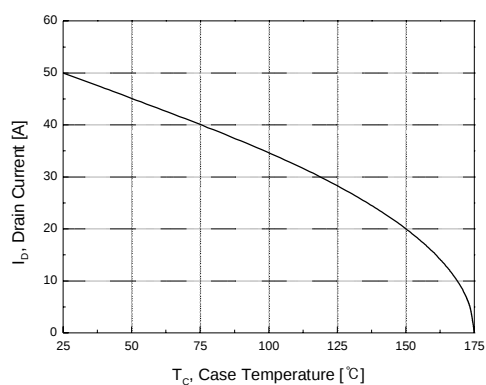

**Figure 10. Maximum Drain Current vs. Case Temperature**

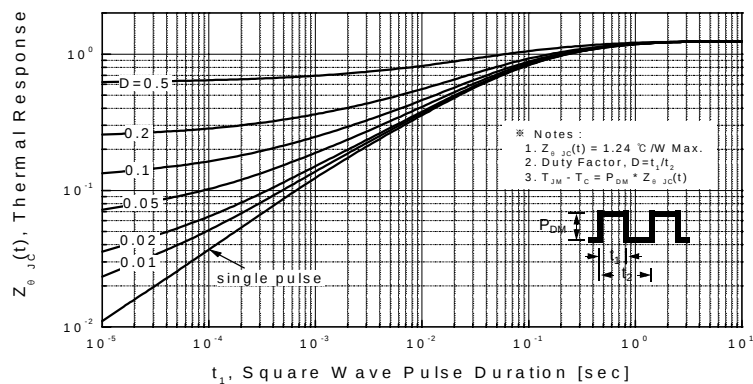

**Figure 11. Transient Thermal Response Curve**



### Gate Charge Test Circuit & Waveform



### Resistive Switching Test Circuit & Waveforms



### Unclamped Inductive Switching Test Circuit & Waveforms

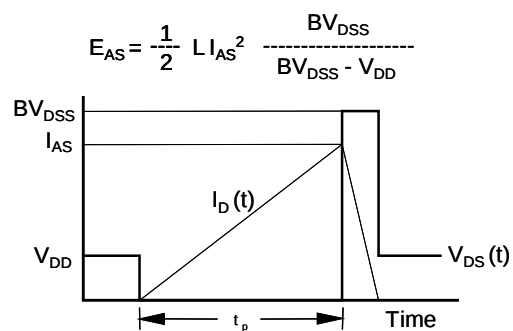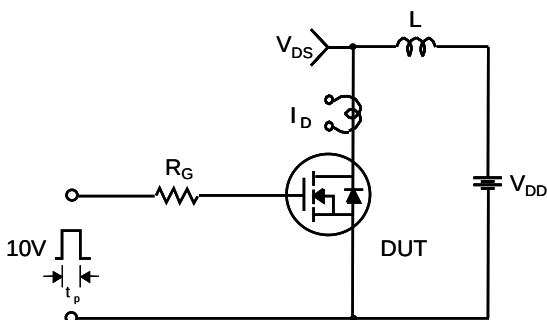


## Peak Diode Recovery dv/dt Test Circuit &amp; Waveforms



Package Dimensions

TO-220

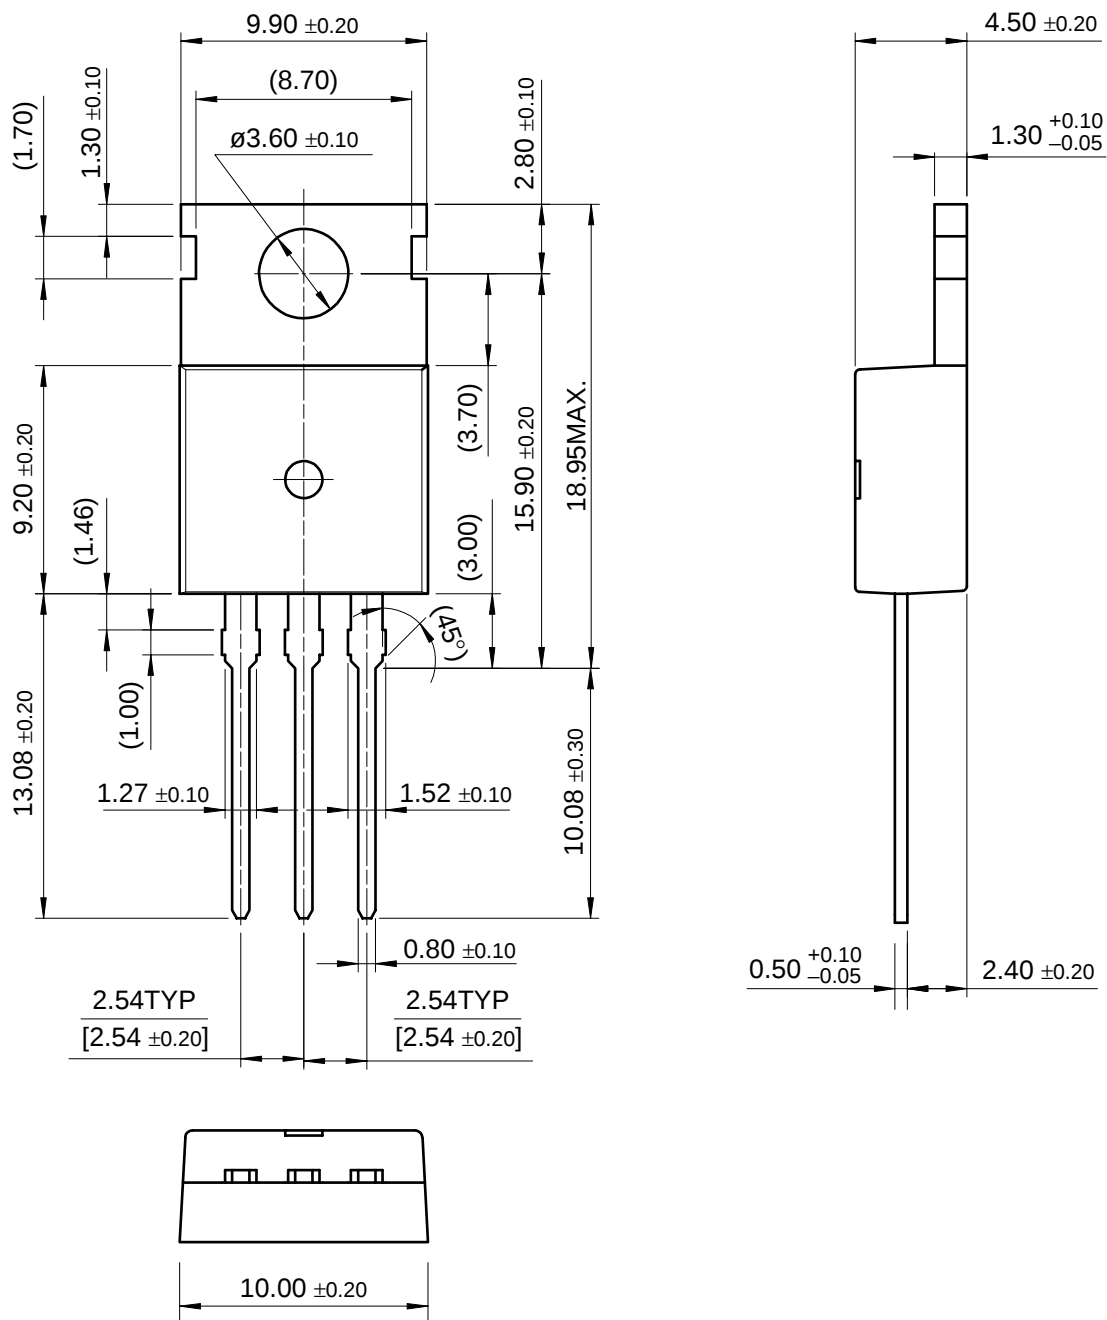

Dimensions in Millimeters

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                                  |                                 |                                |                                 |                             |
|--------------------------------------------------|---------------------------------|--------------------------------|---------------------------------|-----------------------------|
| ACE <sup>™</sup>                                 | FACT <sup>™</sup>               | ImpliedDisconnect <sup>™</sup> | PACMAN <sup>™</sup>             | SPM <sup>™</sup>            |
| ActiveArray <sup>™</sup>                         | FACT Quiet series <sup>™</sup>  | ISOPLANAR <sup>™</sup>         | POP <sup>™</sup>                | Stealth <sup>™</sup>        |
| Bottomless <sup>™</sup>                          | FAST <sup>®</sup>               | LittleFET <sup>™</sup>         | Power247 <sup>™</sup>           | SuperSOT <sup>™</sup> -3    |
| CoolFET <sup>™</sup>                             | FAST <sup>™</sup>               | MicroFET <sup>™</sup>          | PowerTrench <sup>®</sup>        | SuperSOT <sup>™</sup> -6    |
| CROSSVOLT <sup>™</sup>                           | FRFET <sup>™</sup>              | MicroPak <sup>™</sup>          | QFET <sup>™</sup>               | SuperSOT <sup>™</sup> -8    |
| DOME <sup>™</sup>                                | GlobalOptoisolator <sup>™</sup> | MICROWIRE <sup>™</sup>         | QS <sup>™</sup>                 | SyncFET <sup>™</sup>        |
| EcoSPARK <sup>™</sup>                            | GTO <sup>™</sup>                | MSX <sup>™</sup>               | QT Optoelectronics <sup>™</sup> | TinyLogic <sup>®</sup>      |
| E <sup>2</sup> CMOS <sup>™</sup>                 | HiSeC <sup>™</sup>              | MSXPro <sup>™</sup>            | Quiet Series <sup>™</sup>       | TruTranslation <sup>™</sup> |
| EnSigna <sup>™</sup>                             | I <sup>2</sup> C <sup>™</sup>   | OCX <sup>™</sup>               | RapidConfigure <sup>™</sup>     | UHC <sup>™</sup>            |
| Across the board. Around the world. <sup>™</sup> |                                 | OCXPro <sup>™</sup>            | RapidConnect <sup>™</sup>       | UltraFET <sup>®</sup>       |
| The Power Franchise <sup>™</sup>                 |                                 | OPTOLOGIC <sup>®</sup>         | SILENT SWITCHER <sup>®</sup>    | VCX <sup>™</sup>            |
| Programmable Active Droop <sup>™</sup>           |                                 | OPTOPLANAR <sup>™</sup>        | SMART START <sup>™</sup>        |                             |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                                            |
|--------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                                    |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.                                                       |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                                   |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)