

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0879450001](#)
Status: **Active**
Description: 1.27mm (.050") Signal Pitch, 0.80mm (.031") SCSI Pitch, 1.27mm (.050") Power Pitch
SAS Receptacle, Right Angle, Surface Mount, "Z" Height of 7.07mm (.278"), with
Beveled Metal Pins, PCB Thickness 1.60mm (.063"), 29 Circuits, Lead free

Documents:

[3D Model](#) [Product Specification PS-87945-034 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [87945](#)
Application Board-to-Board
Comments No pick and place cap|"Z" Height - 7.07mm (.278")
Component Type Receptacle
Product Name SAS
Type N/A

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 7, SCSI 7, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Number of Rows 2
Orientation Right Angle
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Panel Mount Yes
Pitch - Mating Interface (in) 0.031 In, 0.050 In
Pitch - Mating Interface (mm) 0.80 mm, 1.27 mm
Pitch - Term. Interface (in) 0.031 In, 0.050 In
Pitch - Term. Interface (mm) 0.80 mm, 1.27 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.76
Plating min: Termination (µin) 102
Plating min: Termination (µm) 2.54
Polarized to Mating Part Yes
Polarized to PCB Yes
Surface Mount Compatible (SMC) N/A

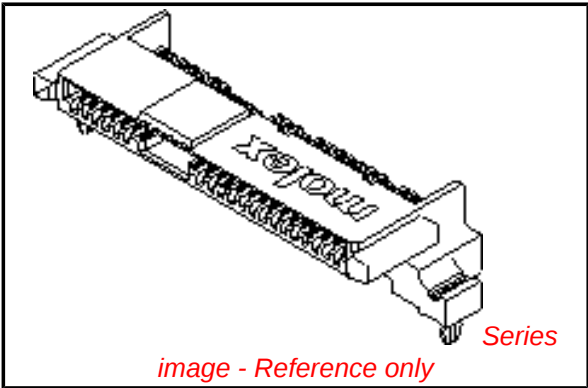


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[87945Series](#)

Mates With

[87679](#) , [87799](#) , [87703](#) , SFF 8482 Hard
Disk Drive and Backplane Plug

Temperature Range - Operating	0°C to +55°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers

Product Specification	PS-87945-034
Sales Drawing	SD-87945-001

This document was generated on 04/09/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

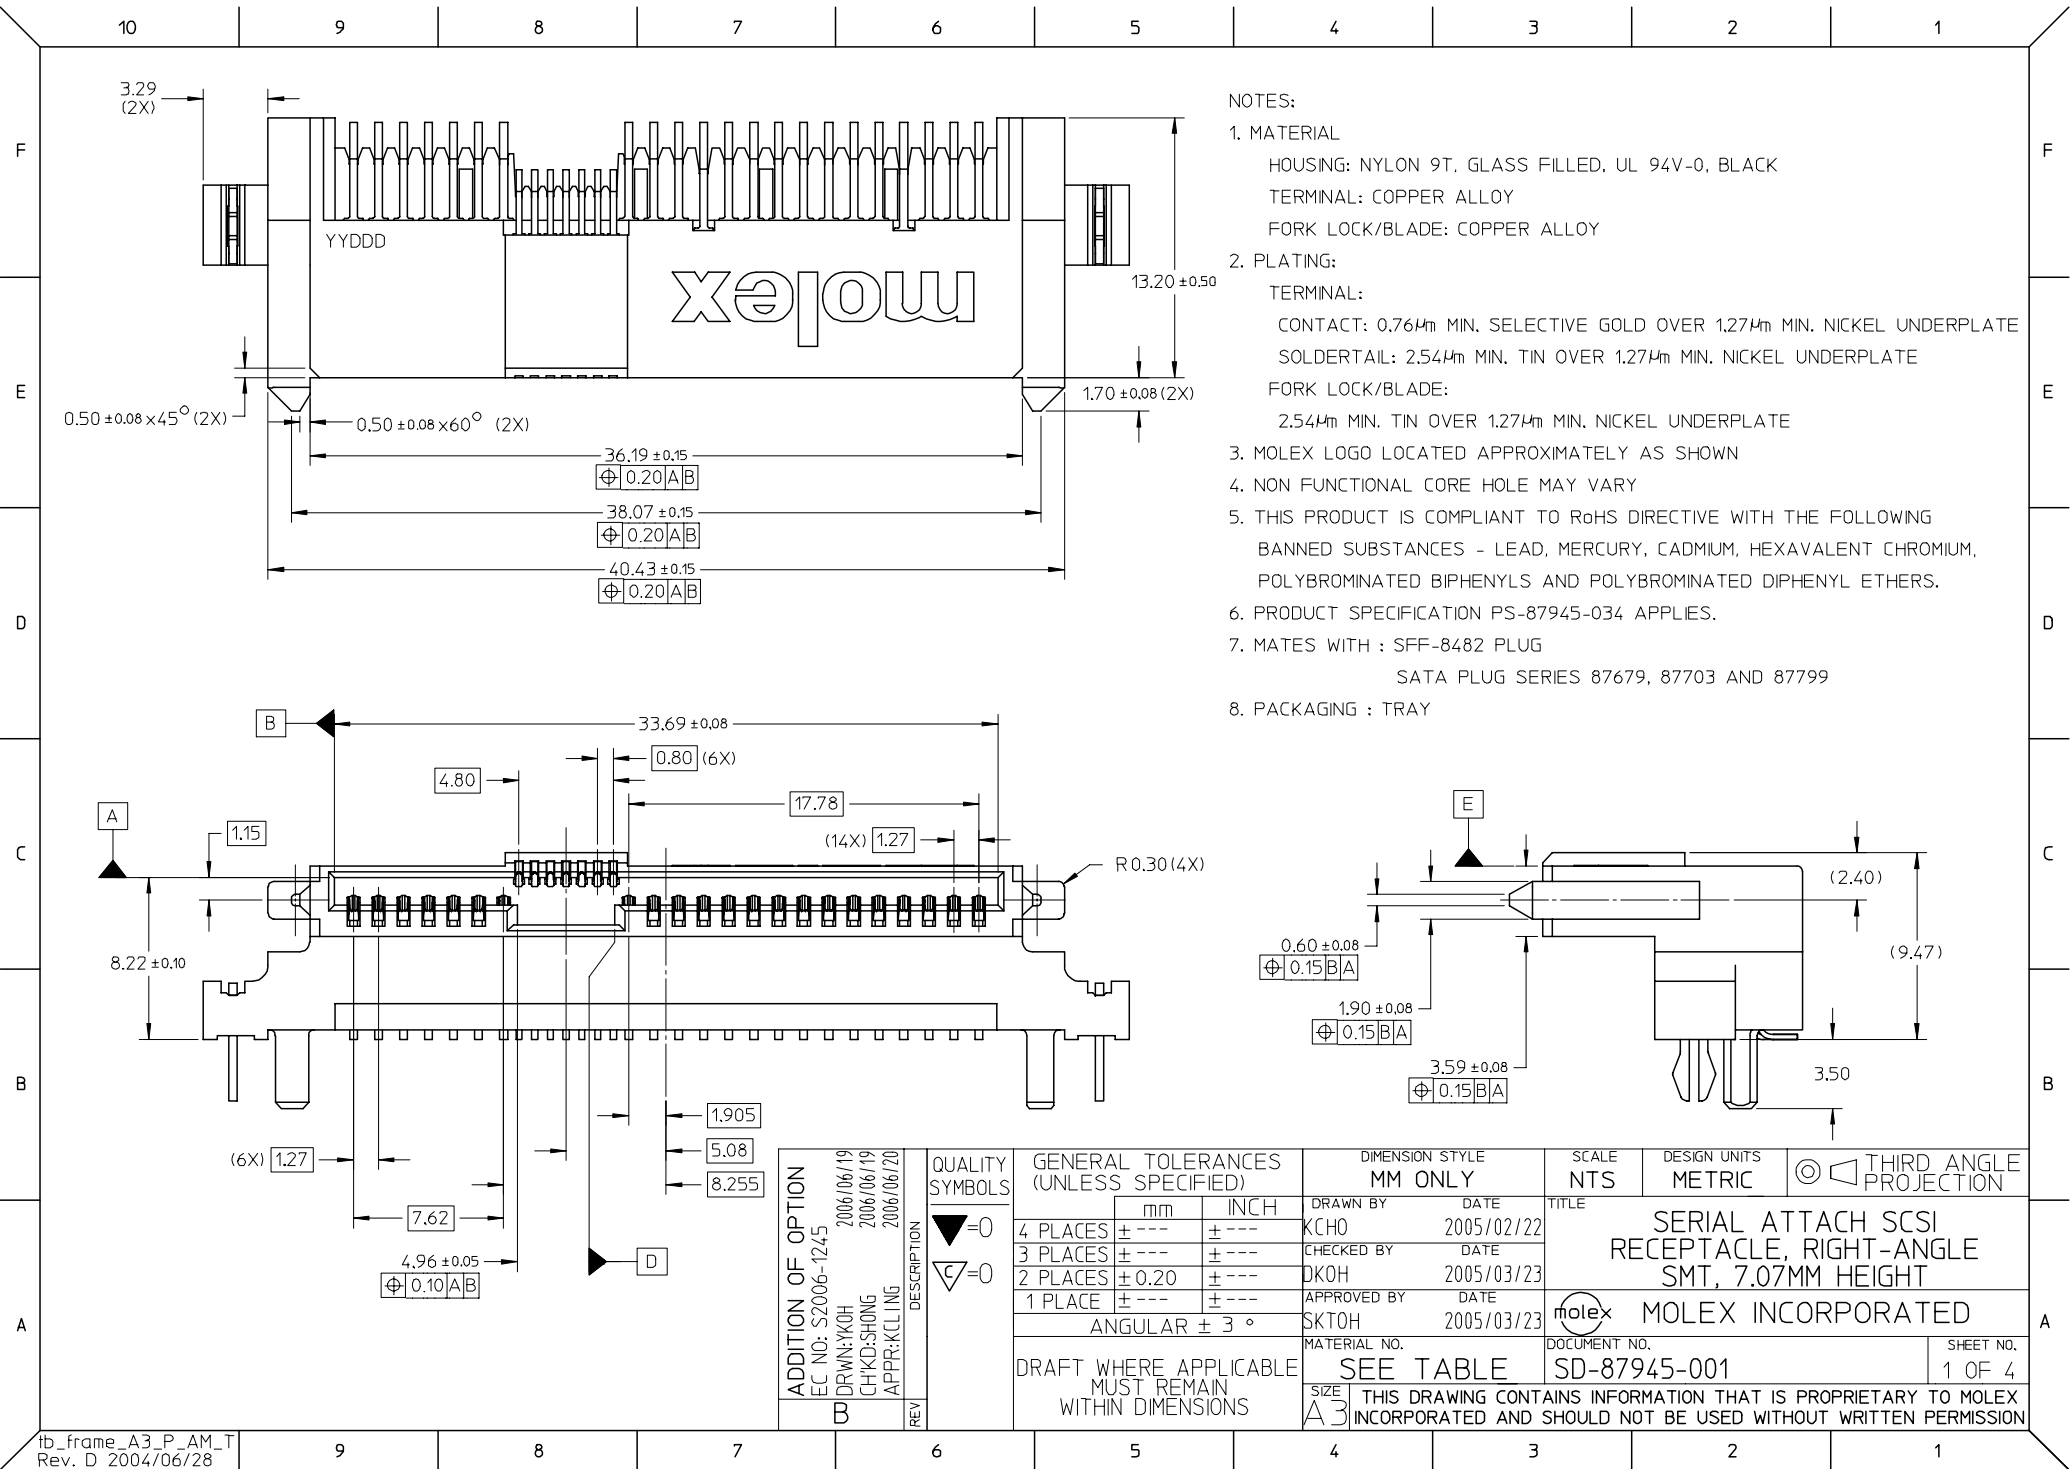

NOTES:

1. MATERIAL

HOUSING: NYLON 9T, GLASS FILLED, UL 94V-0, BLACK

TERMINAL: COPPER ALLOY

FORK LOCK/BLADE: COPPER ALLOY

2. PLATING:

TERMINAL:

CONTACT: 0.76µm MIN. SELECTIVE GOLD OVER 1.27µm MIN. NICKEL UNDERPLATE

SOLDERTAIL: 2.54µm MIN. TIN OVER 1.27µm MIN. NICKEL UNDERPLATE

FORK LOCK/BLADE:

2.54µm MIN. TIN OVER 1.27µm MIN. NICKEL UNDERPLATE

3. MOLEX LOGO LOCATED APPROXIMATELY AS SHOWN

4. NON FUNCTIONAL CORE HOLE MAY VARY

5. THIS PRODUCT IS COMPLIANT TO RoHS DIRECTIVE WITH THE FOLLOWING BANNED SUBSTANCES - LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, POLYBROMINATED BIPHENYLS AND POLYBROMINATED DIPHENYL ETHERS.

6. PRODUCT SPECIFICATION PS-87945-034 APPLIES.

7. MATES WITH : SFF-8482 PLUG

SATA PLUG SERIES 87679, 87703 AND 87799

8. PACKAGING : TRAY


ADDITION OF OPTION	EC NO: S2006-1245	2006/06/19
	DRWN:YKH	2006/06/19
	CHKD:SHONG	2006/06/19
	APPR:KCLING	2006/06/20
B	REV	DESCRIPTION


QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± ---	± ---
ANGULAR ± 3 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
KCHO	2005/02/22
CHECKED BY	DATE
DKOH	2005/03/23
APPROVED BY	DATE
SKTOH	2005/03/23
MATERIAL NO.	
SEE TABLE	
SIZE	A3


SCALE	DESIGN UNITS	THIRD ANGLE	
NTS	METRIC	PROJECTION	
TITLE			
SERIAL ATTACH SCSI RECEPTACLE, RIGHT-ANGLE SMT, 7.07MM HEIGHT			
MOLEX INCORPORATED			
DOCUMENT NO.			SHEET NO.
SD-87945-001			1 OF 4
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

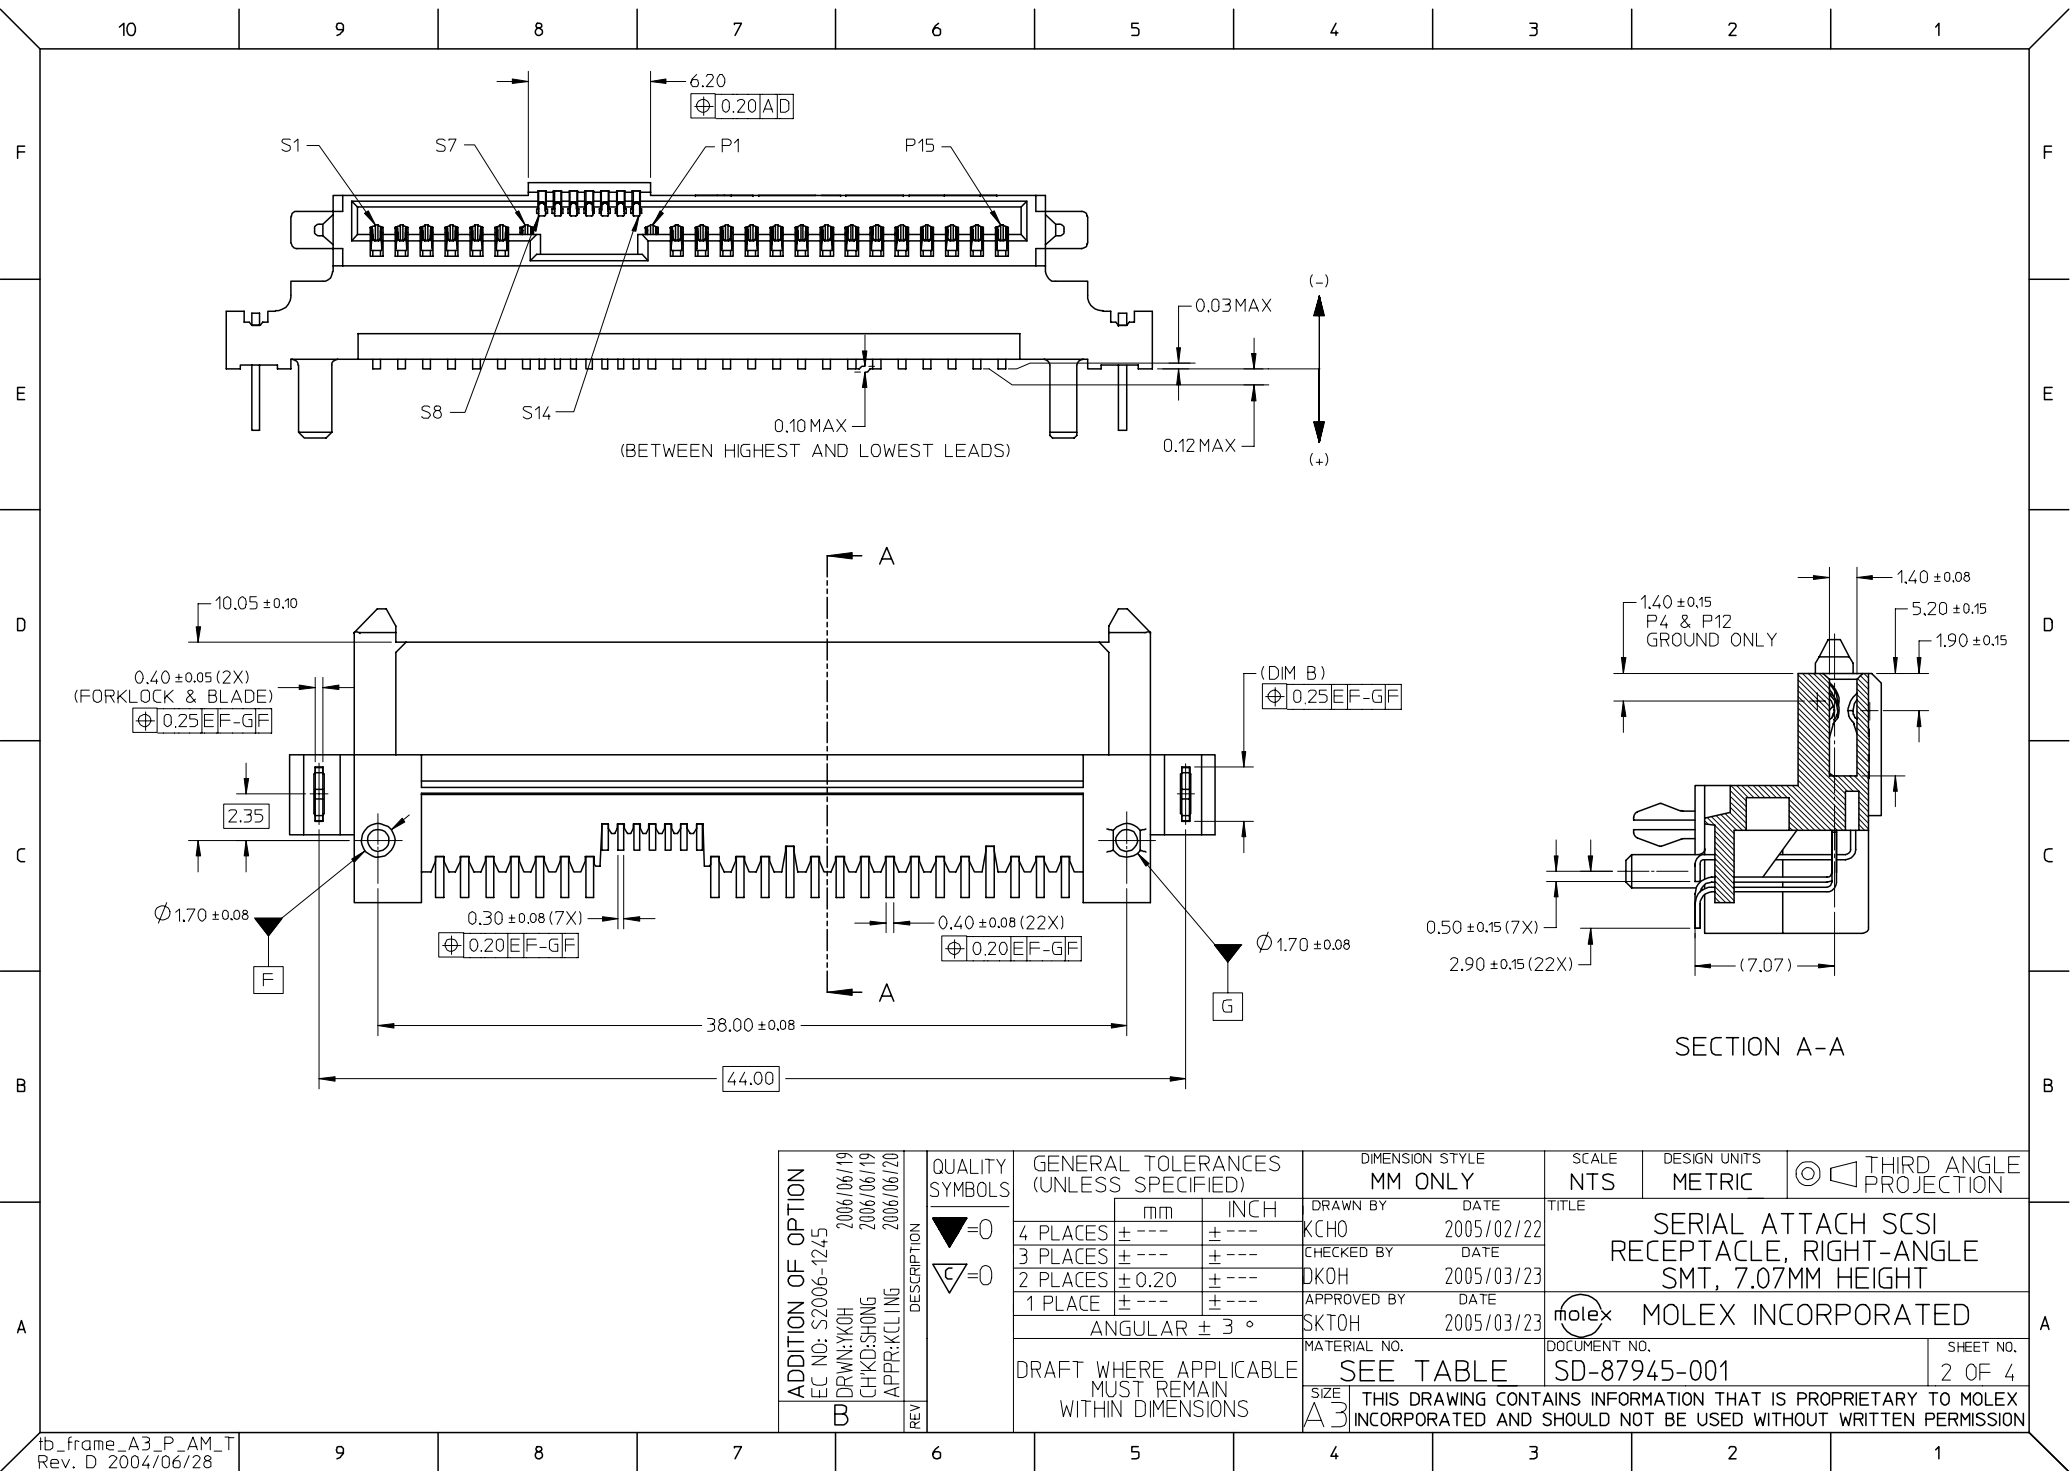

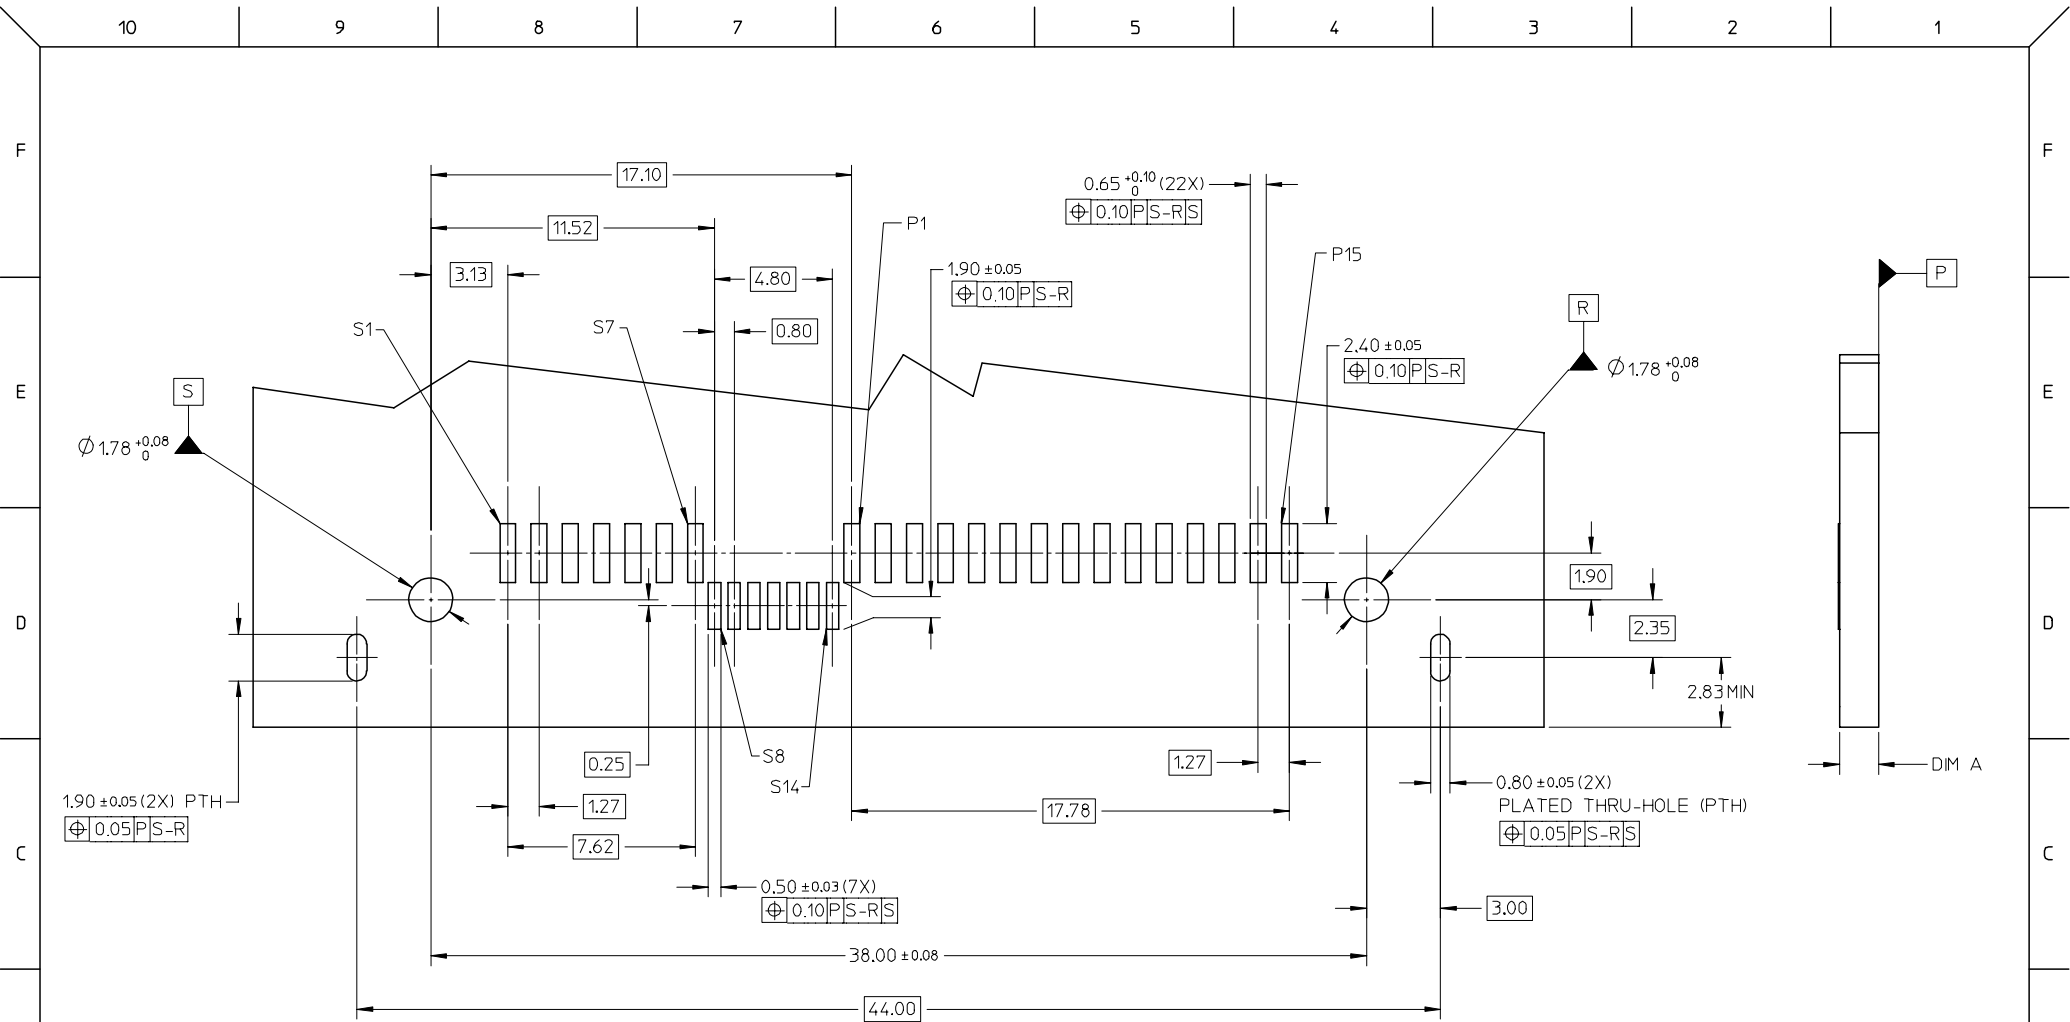

RECOMMENDED PCB LAYOUT

ADDITION OF OPTION EC NO: S2006-1245 DRWN:YKH CHKD:SHH APPR:KCLING B	2006/06/19 2006/06/19 2006/06/20	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
					mm	INCH	DRAWN BY KCHO	DATE 2005/02/22	SERIAL ATTACH SCSI RECEPTACLE, RIGHT-ANGLE SMT, 7.07MM HEIGHT MOLEX MOLEX INCORPORATED				
				4 PLACES	± ---	± ---	CHECKED BY	DATE					
				3 PLACES	± ---	± ---	DKOH	2005/03/23					
				2 PLACES	± 0.20	± ---	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED				
				1 PLACE	± ---	± ---	SKTOH	2005/03/23					
				ANGULAR ± 3 °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		SD-87945-001		3 OF 4						
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

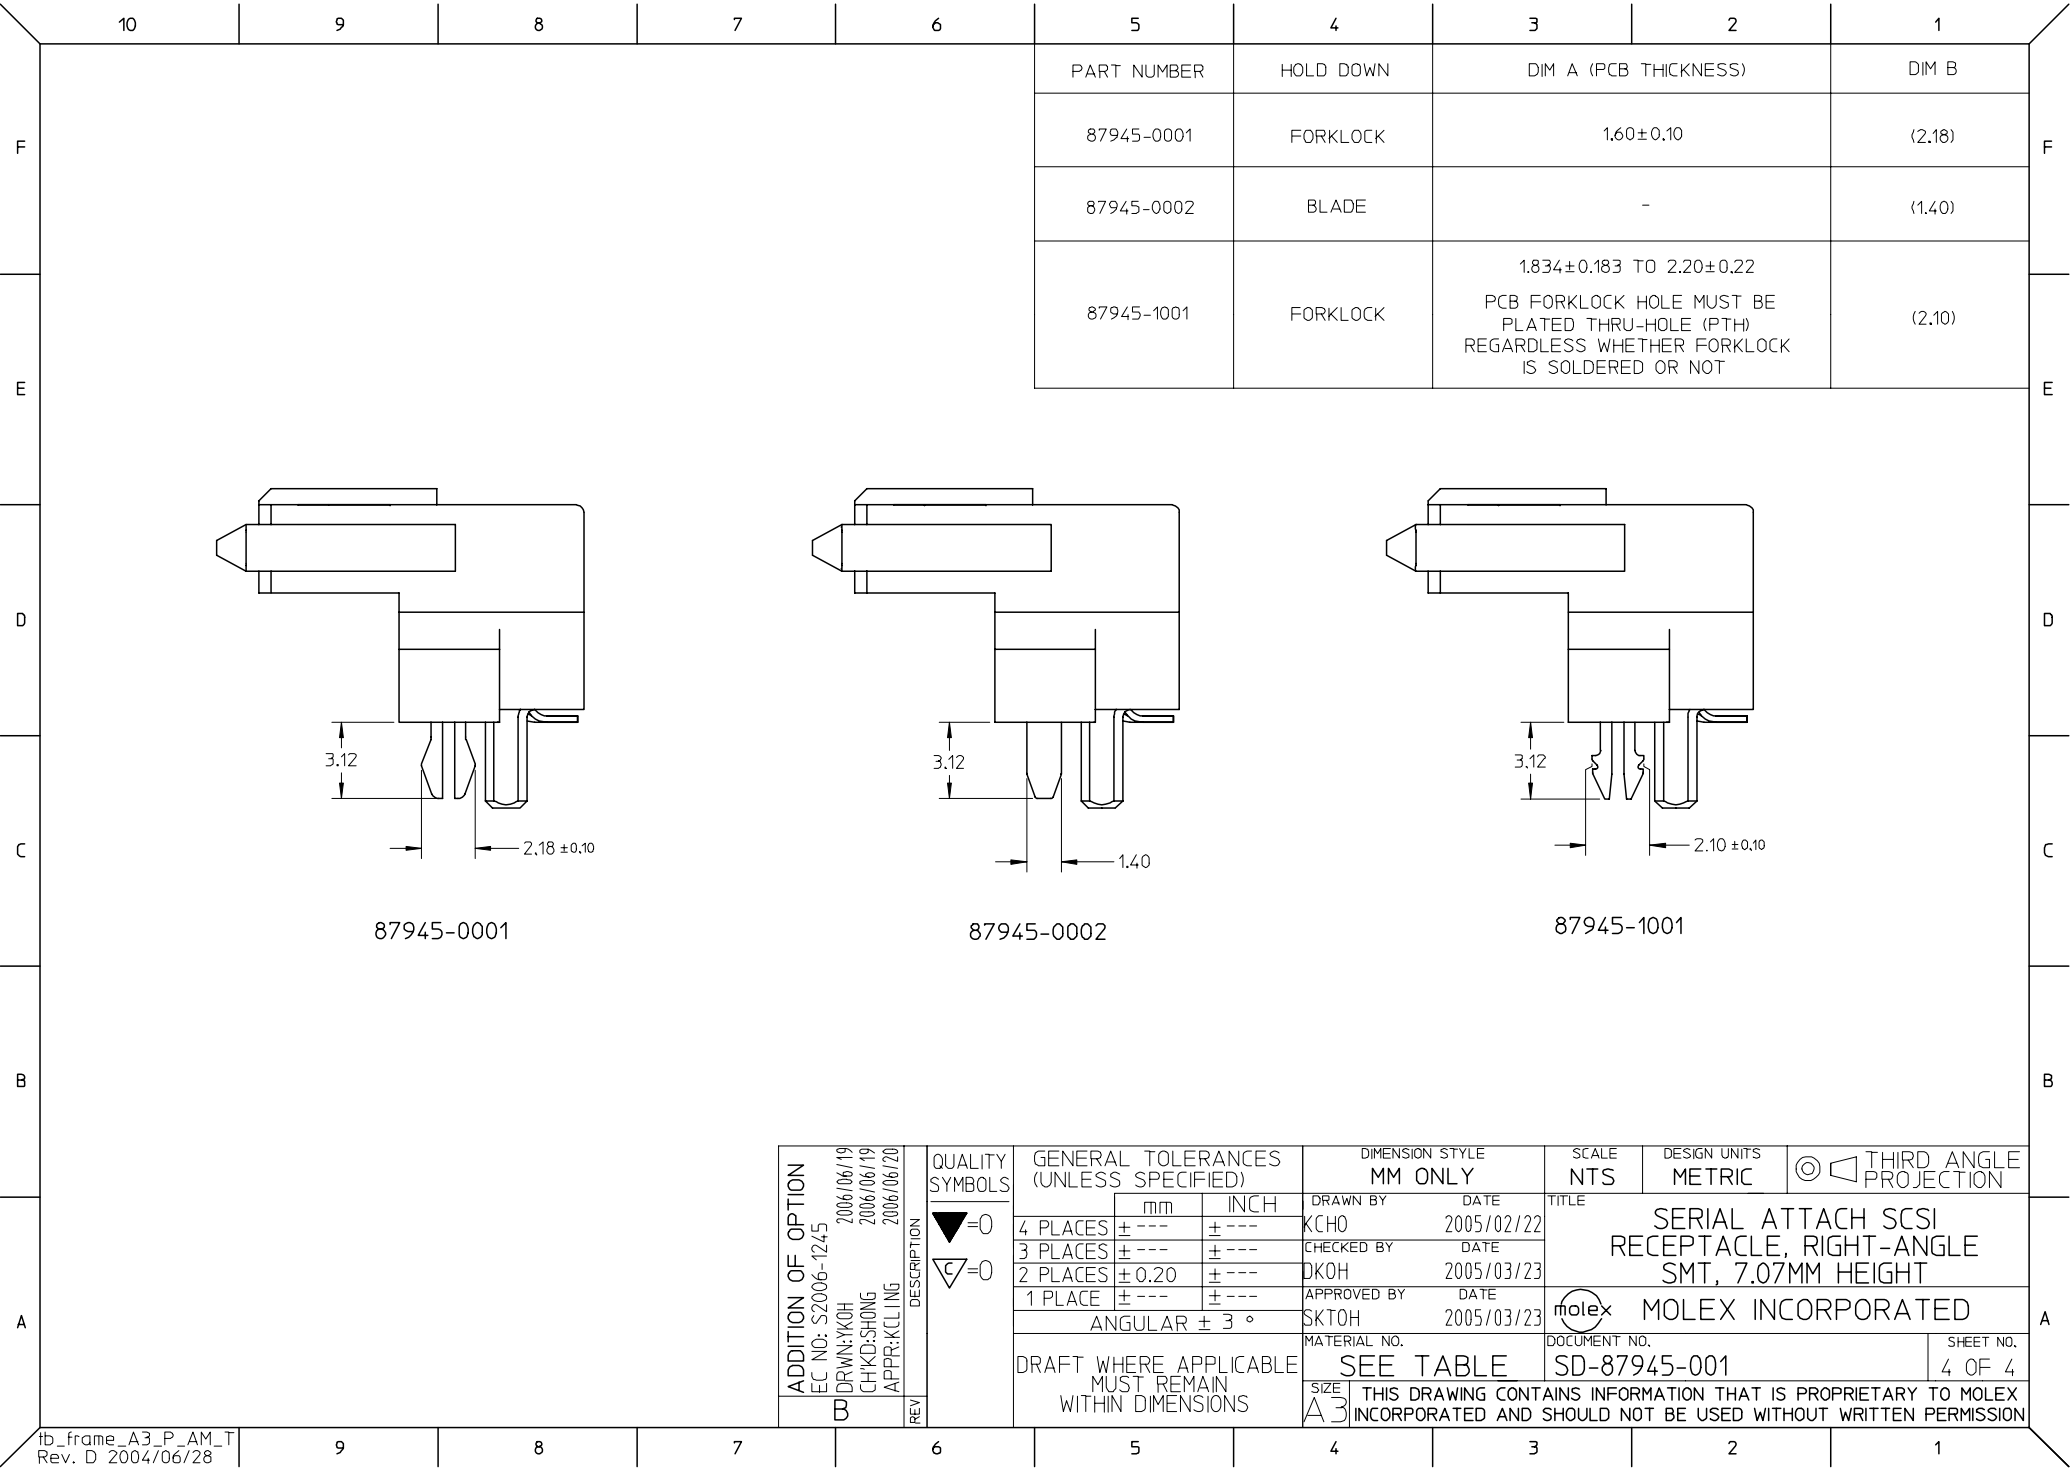

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru