

# 3M™ Antistatic Utility Tape

## 40 Printed and Unprinted

Data Sheet

July 2013

---

### Product Description

3M™ Antistatic Utility Tapes 40 Printed and Unprinted represent a breakthrough in pressure-sensitive adhesive (PSA) tape technology. This new tape, which generates less than 50 Volts on unwind and removal from stainless steel, helps prevent electrostatic discharge (ESD) damage to sensitive electronic components in manufacturing environments. Triboelectric charge may vary with your application and environment.

---


### Product Features

- **Excellent Performance**

3M 40 antistatic utility tape can be used at static-safeguard workstations as part of your total static control program. It generates very low levels of static charge even in dry conditions of 10% relative humidity (RH). The tape is supplied on a paper core; antistatic plastic cores are available to minimize particulate contamination in clean work areas.

- **Proprietary Technology**

3M 40 antistatic utility tape is a transparent polyester film tape with acrylic adhesive. Made with a proprietary technology, the tape generates extremely low levels of triboelectric charge when it is unwound from the roll and also when removed from most surfaces on which it is placed. This makes the tape an excellent choice for use near electronic components and assemblies. The tape is supplied on 36-yard and 72-yard rolls on 1" and 3" cores.

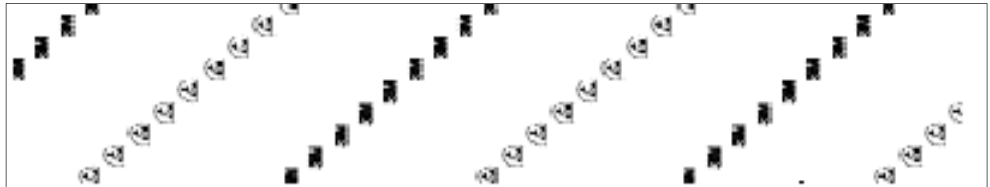

- **40 Tape Printed for Protection**

The tape is printed on the adhesive side with the 3M logo and the ESD Protective Symbol. This reminds workers that 40 tape is one of the only utility tapes you should allow in static-safeguarded areas.

---

# 3M™ Antistatic Utility Tape 40 Printed and Unprinted

## Applications

- Office/Clean Room/Work Station
  - Holding notes of work orders
  - Holding obstruction down
  - Third hand, general purpose
- Manufacturing
  - Close static shielding bags
  - Conformal coating/maskins
  - Holding and sealing supplies
- Packaging
  - Box, bag and container sealing/holding DIP Tubes
- Removing Contaminants
- Label Stock

## Typical Properties

| Property<br>Unit of Measure                 | Test<br>Method       | Typical<br>Value |
|---|----------------------|------------------|
| <b>ELECTRICAL PROPERTIES</b>                |                      |                  |
| <b>Static charge generation:</b>            |                      |                  |
| Removal from roll, 10% RH, volts            | 3M                   | 20               |
| Removal from roll, 50% RH, volts            | 3M                   | 5                |
| Removal from stainless steel, 10% RH, volts | 3M                   | 50               |
| Removal from stainless steel, 50% RH, volts | 3M                   | 5                |
| <b>Surface resistance:</b>                  |                      |                  |
| Adhesive @ 50% RH, $\Omega$                 | ESD Assoc. STD 11.11 | $5 \times 10^6$  |
| Adhesive @ 10% RH, $\Omega$                 | ESD Assoc. STD 11.11 | $5 \times 10^6$  |
| <b>TAPE PROPERTIES</b>                      |                      |                  |
| Adhesion to steel, oz/inch                  | ASTM D 1000          | 15               |
| Unwind force from roll, oz/inch             | ASTM D 1000          | 24               |
| Thickness, mils                             | ASTM D 1000          | 2.2              |
| Break strength, lb./inch                    | ASTM D 1000          | 20               |
| Slit width, inch                            | ASTM D 1000          | $\pm 1/64$       |
| <b>Non - outgassing</b>                     |                      |                  |
| TML   | ASTM E 595           | <1.0%            |
| CVCM  | ASTM E 595           | <0.1%            |

# 3M™ Antistatic Utility Tape 40 Printed and Unprinted

---

|                   |  |
|-------------------|--|
| <b>Shelf-Life</b> | This product has a 2-year shelf life from date of manufacture when stored in a humidity controlled storage (10°C / 50°F to 27°C / 80 °F and <75% relative humidity). |
|-------------------|--|

---

|                     |   |
|---------------------|---|
| <b>Availability</b> | Please contact your local distributor; available from 3M.com/oem [Where to Buy] or call 1.800.676.8381. |
|---------------------|---|

---

---

|                         |   |
|-------------------------|---|
| <b>Important Notice</b> | All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product, which are not contained in 3M's current publications, or any contrary statements contained on your purchase order, shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. |
|-------------------------|---|

---

|  |   |
|--|---|
| <b>Warranty; Limited Remedy; Limited Liability</b> | This product will be free from defects in material and manufacture at the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted. |
|--|---|

---

3M is a trademark of 3M Company.



## Electrical Markets Division

6801 River Place Blvd.

Austin, TX 78726-9000

800.245.3573

FAX: 800.245.0329

www.3M.com/electrical

Please recycle

© 3M 2013 All rights reserved

78-8124-4849-2 Rev B

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)