



### Main

Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSVNE
Safety module application	For zero speed detection
Function of module	Monitoring 3-phase motor with variable number of poles and star-delta starting Monitoring 3-phase motor + variable speed drive Monitoring 3-phase motor with star-delta starting Monitoring 3-phase motor Monitoring dc motor Monitoring XPS AK Monitoring star-delta motor starter and guard switch type XCS E
Safety level	Can reach PL d/category 3 conforming to EN/ISO 13849-1 Can reach SILCL 2 conforming to EN/IEC 62061
Safety reliability data	MTTFd = 124.1 years conforming to EN/ISO 13849-1 DC > 99 % conforming to EN/ISO 13849-1 PFHd = 9.26E-9 1/h conforming to EN/IEC 62061
[Us] rated supply voltage	24 V DC (- 15...10 %)
Output type	Relay 1 NO + 1 NC, volt-free
Number of additional circuits	2 solid state outputs

### Complementary

Product destination	For motor power supply <= 60 Hz
Power consumption in W	<= 3.5 W
Input voltage	500 Vrms
Input detection threshold	0.01...0.1 V
Breaking capacity	C300: holding 180 VA AC-15 relay output C300: inrush 1800 VA AC-15 relay output
Breaking capacity	10 mA/48 V for solid state output circuit 20 mA / 24 V solid state output circuit 1.5 A/24 V - L/R = 50 ms, DC-13 for NO relay output circuit 1.2 A/24 V - L/R = 50 ms, DC-13 for NC relay output circuit
[Ith] conventional free air thermal current	<= 2.5 A for relay output
Associated fuse rating	4 A gG relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA relay output
Minimum output voltage	17 V relay output
[Ui] rated insulation voltage	300 V, degree of pollution 2 conforming to DIN VDE 0110 parts 1 and 2 300 V, degree of pollution 2 conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III, conforming to DIN VDE 0110 parts 1 and 2 4 kV overvoltage category III, conforming to IEC 60947-5-1
Local signalling	4 LEDs
Connections - terminals	Captive screw clamp terminals, removable terminal block flexible cable: 0.2...1.5 mm <sup>2</sup> without cable end, 2 wires Captive screw clamp terminals, removable terminal block flexible cable: 0.2...2.5 mm <sup>2</sup> without cable end, 1 wire Captive screw clamp terminals, removable terminal block flexible cable: 0.25...1 mm <sup>2</sup> with cable end, without bezel, 2 wires Captive screw clamp terminals, removable terminal block flexible cable: 0.25...2.5 mm <sup>2</sup> with cable end, with bezel, 1 wire Captive screw clamp terminals, removable terminal block flexible cable: 0.25...2.5 mm <sup>2</sup> with cable end, without bezel, 1 wire Captive screw clamp terminals, removable terminal block flexible cable: 0.5...1.5 mm <sup>2</sup> with cable end, with double bezel, 2 wires Captive screw clamp terminals, removable terminal block solid cable: 0.2...1 mm <sup>2</sup> without cable end, 2 wires

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Captive screw clamp terminals, removable terminal block solid cable: 0.2...2.5 mm<sup>2</sup> without cable end, 1 wire

Mounting support	35 mm symmetrical DIN rail
Depth	4.49 in (114 mm)
Height	3.9 in (99 mm)
Width	1.77 in (45 mm)
Product weight	1.1 lb(US) (0.5 kg)

## Environment

standards	EN/IEC 60204-1 EN/IEC 60947-5-1
product certifications	CSA TÜV UL
IP degree of protection	IP20(terminals) conforming to EN/IEC 60529 IP40(enclosure) conforming to EN/IEC 60529
ambient air temperature for operation	14...131 °F (-10...55 °C)
ambient air temperature for storage	-13...185 °F (-25...85 °C)

## Offer Sustainability

WARNING: This product can expose you to chemicals including:

WARNING: This product can expose you to chemicals including:

Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.


For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Dimensions

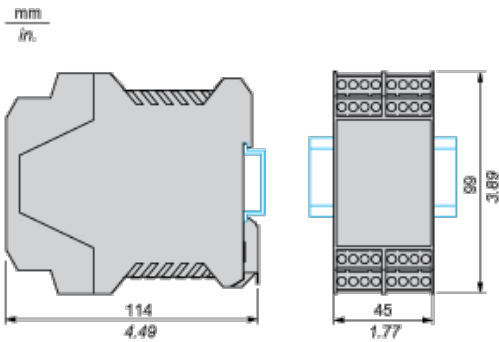

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)