


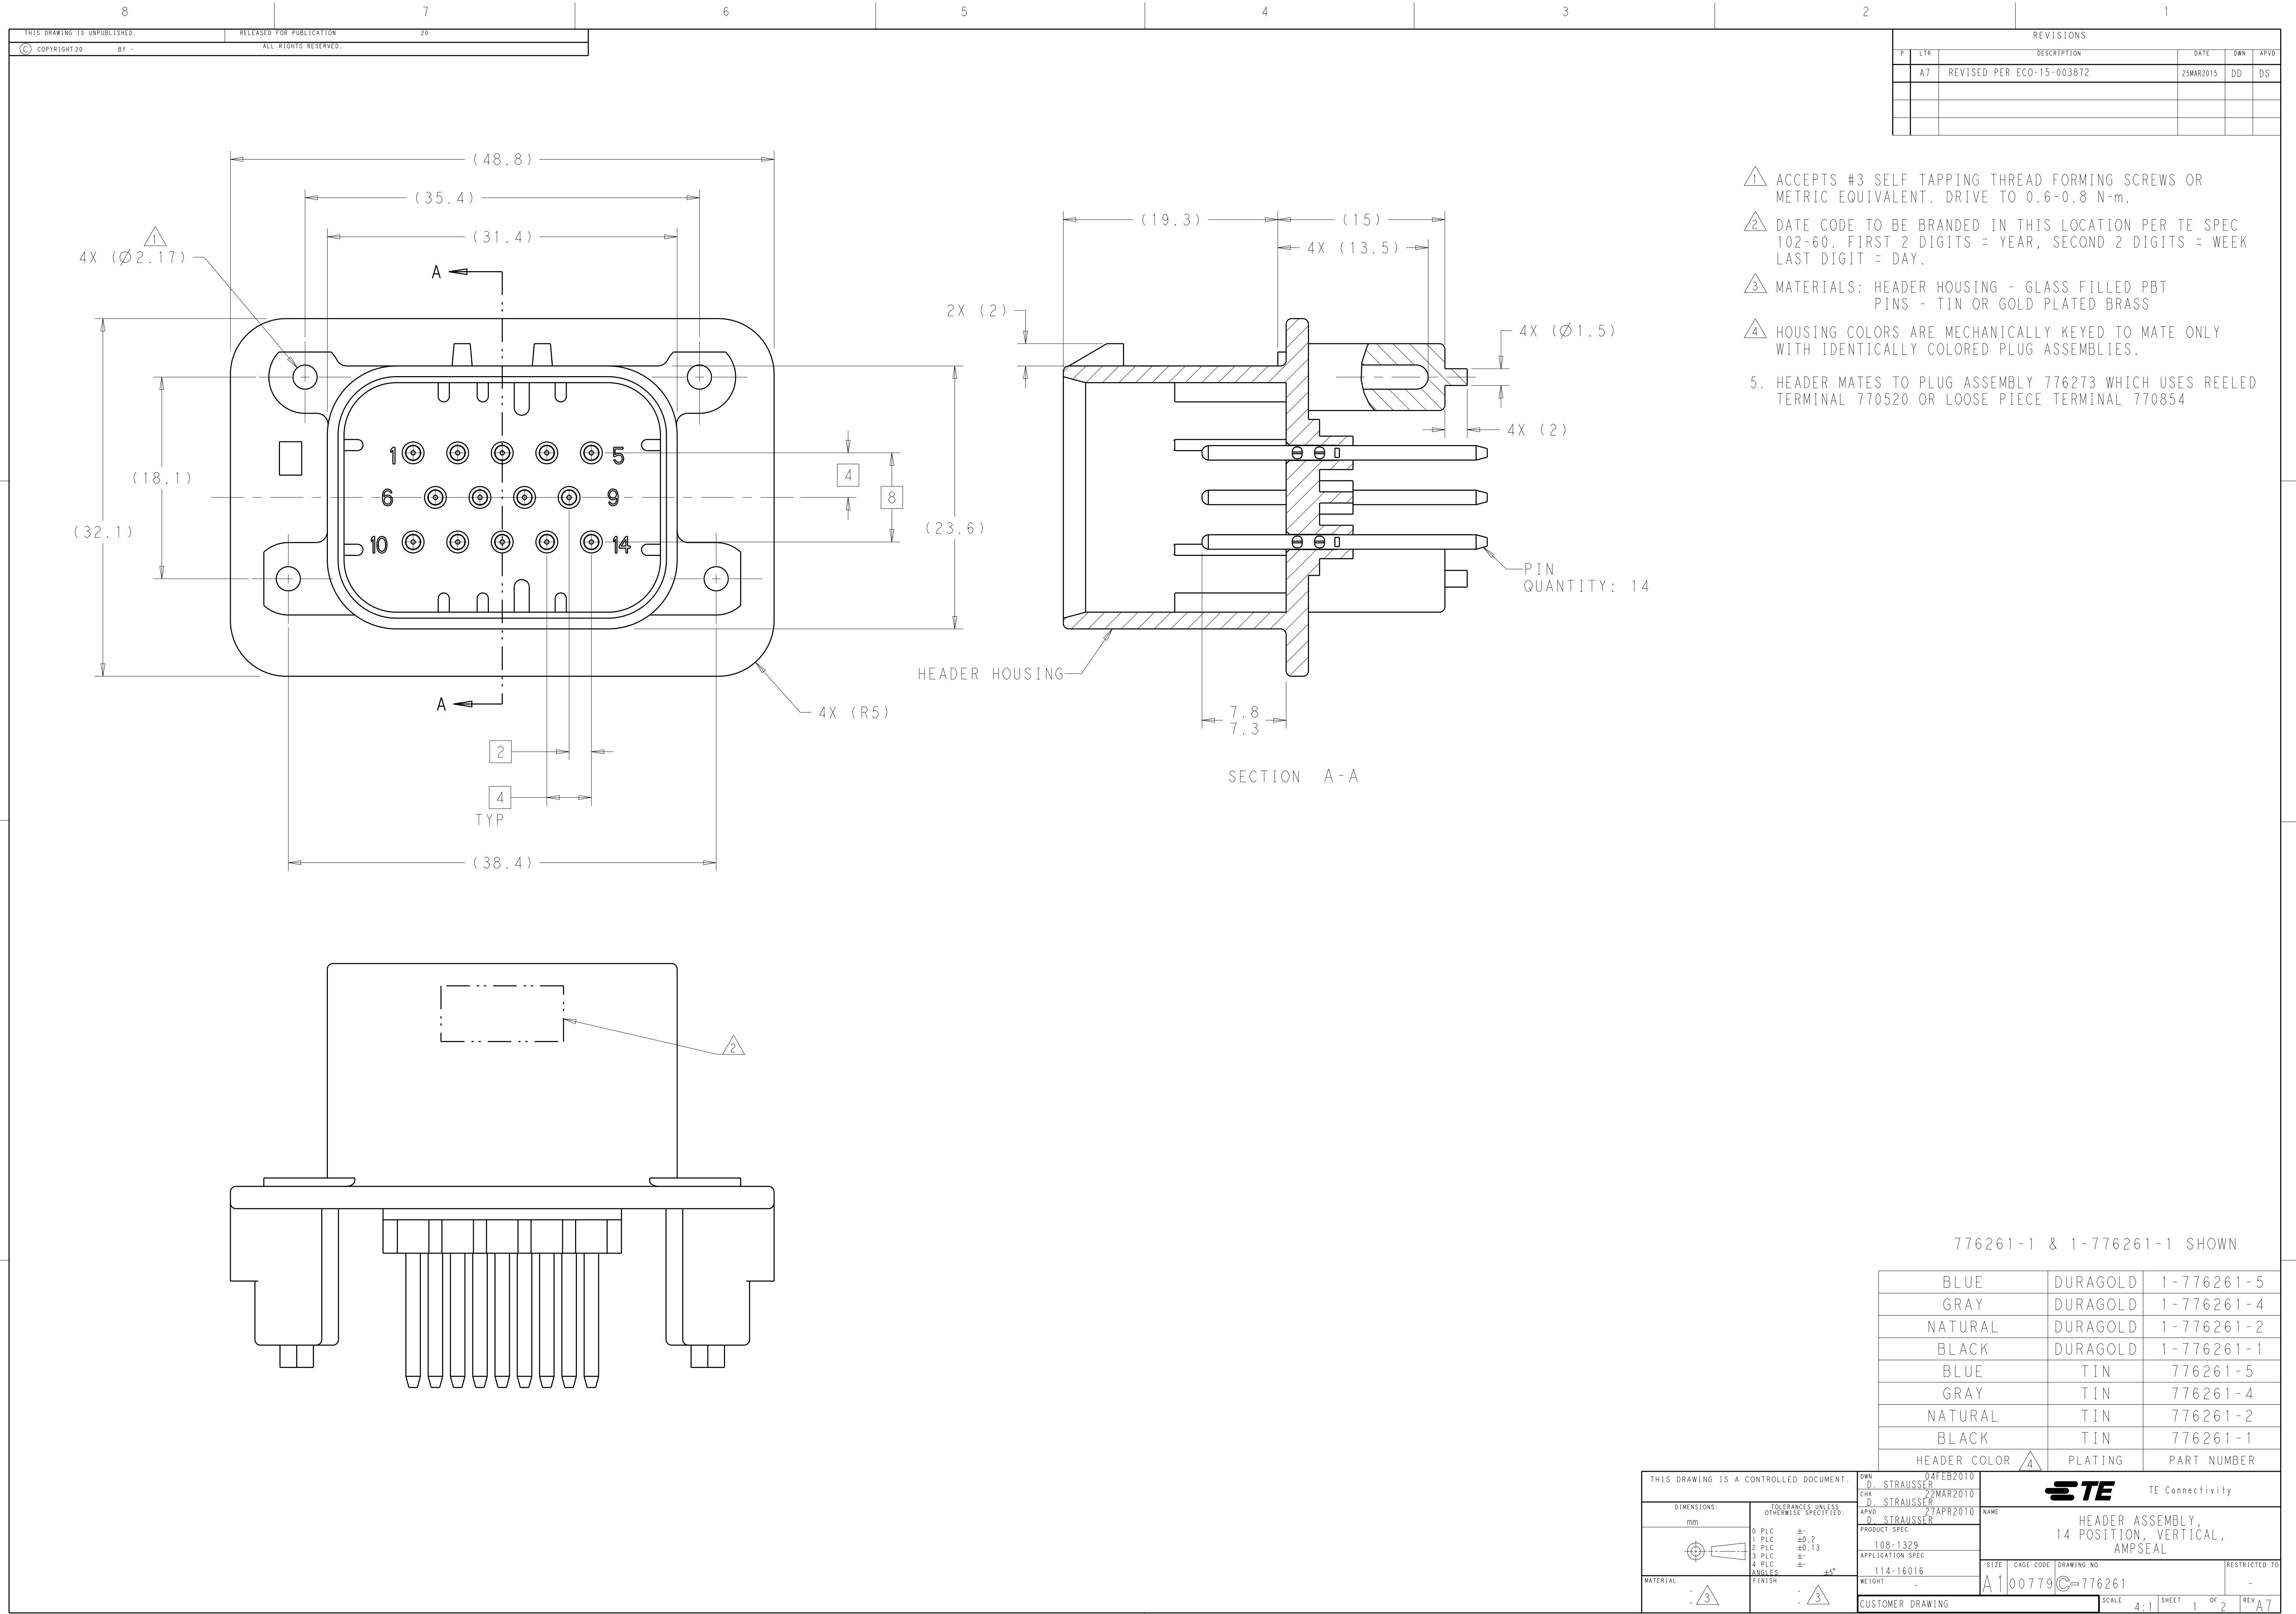

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A7	REVISED PER ECO-15-003872	25MAR2015	DD	DS


- 1 ACCEPTS #3 SELF TAPPING THREAD FORMING SCREWS OR METRIC EQUIVALENT. DRIVE TO 0.6-0.8 N-m.
- 2 DATE CODE TO BE BRANDED IN THIS LOCATION PER TE SPEC 102-60. FIRST 2 DIGITS = YEAR, SECOND 2 DIGITS = WEEK LAST DIGIT = DAY.
- 3 MATERIALS: HEADER HOUSING - GLASS FILLED PBT
PINS - TIN OR GOLD PLATED BRASS
- 4 HOUSING COLORS ARE MECHANICALLY KEYED TO MATE ONLY WITH IDENTICALLY COLORED PLUG ASSEMBLIES.
5. HEADER MATES TO PLUG ASSEMBLY 776273 WHICH USES REELED TERMINAL 770520 OR LOOSE PIECE TERMINAL 770854

776261-1 & 1-776261-1 SHOWN


BLUE	DURAGOLD	1-776261-5
GRAY	DURAGOLD	1-776261-4
NATURAL	DURAGOLD	1-776261-2
BLACK	DURAGOLD	1-776261-1
BLUE	TIN	776261-5
GRAY	TIN	776261-4
NATURAL	TIN	776261-2
BLACK	TIN	776261-1
HEADER COLOR	PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 04FEB2010	NAME	
DIMENSIONS:		CHK D. STRAUSSER 22MAR2010	PRODUCT SPEC	
mm		APVD D. STRAUSSER 27APR2010	APPLICATION SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		108-1329	114-16016	
0 PLC ±.2		114-16016	WEIGHT	
1 PLC ±0.13			CUSTOMER DRAWING	
2 PLC ±.			SCALE 4:1	
3 PLC ±.			SHEET 1 OF 2	
4 PLC ±.			REV A7	
ANGLES ±4°				
FINISH				


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

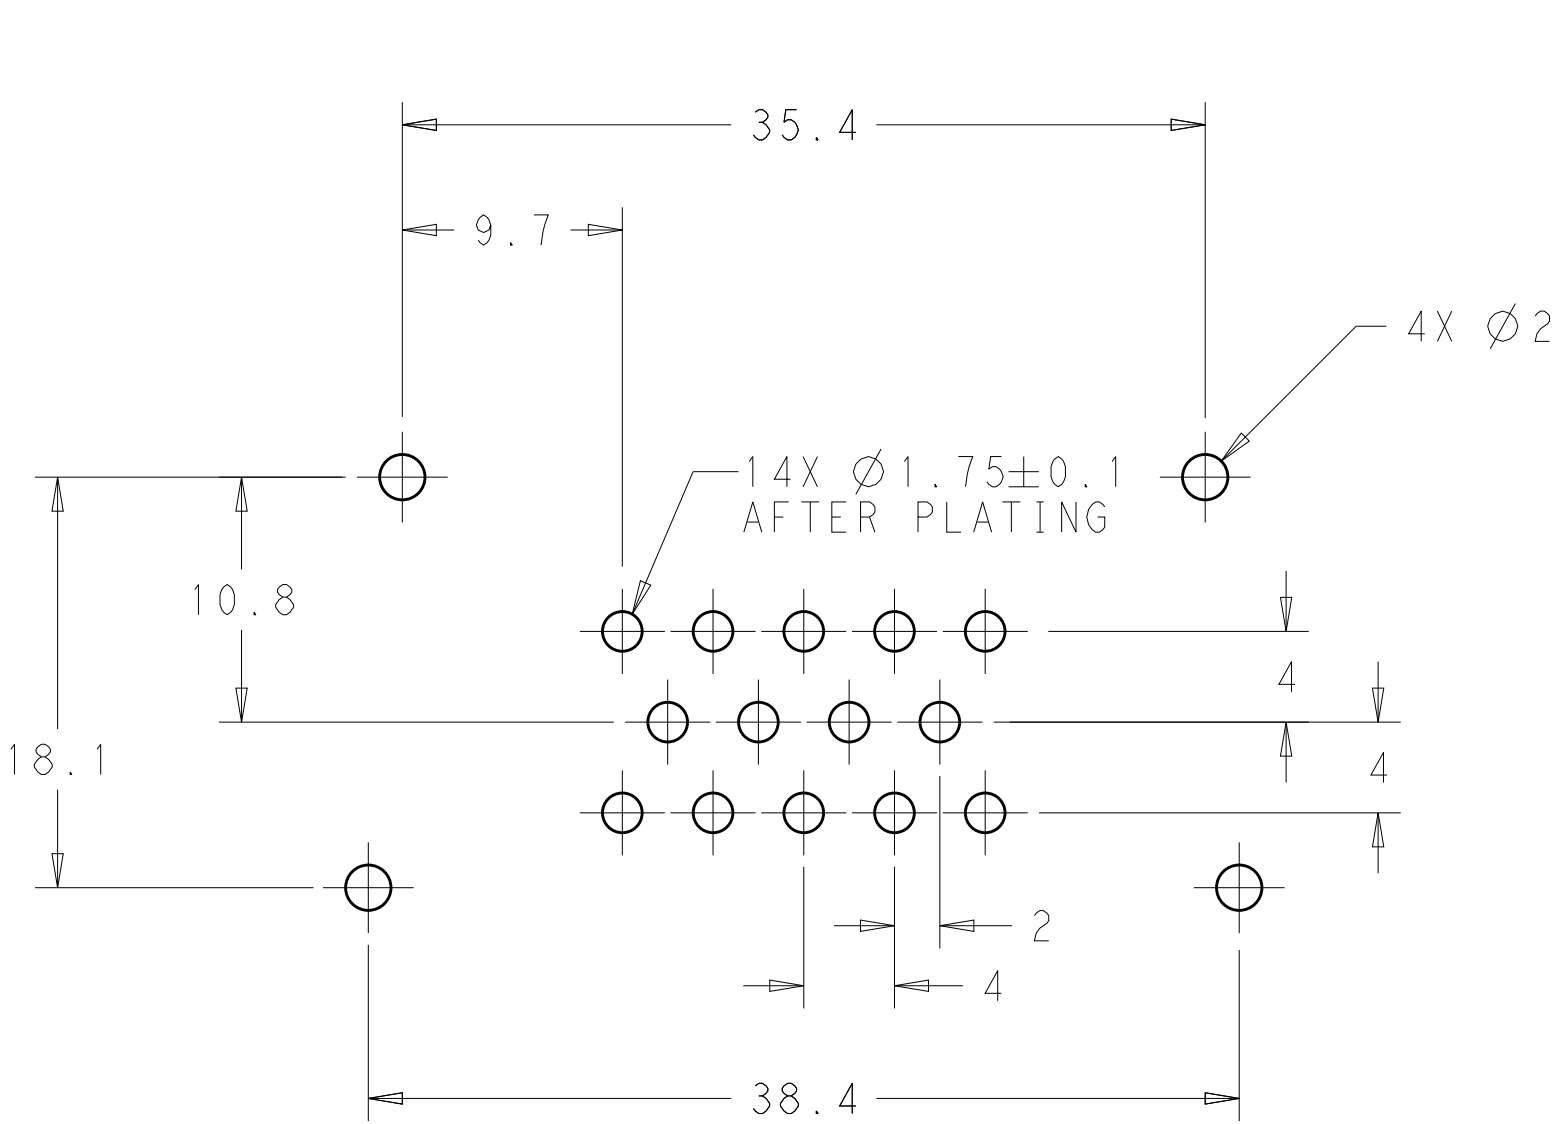


RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 THICK P.C. BOARD

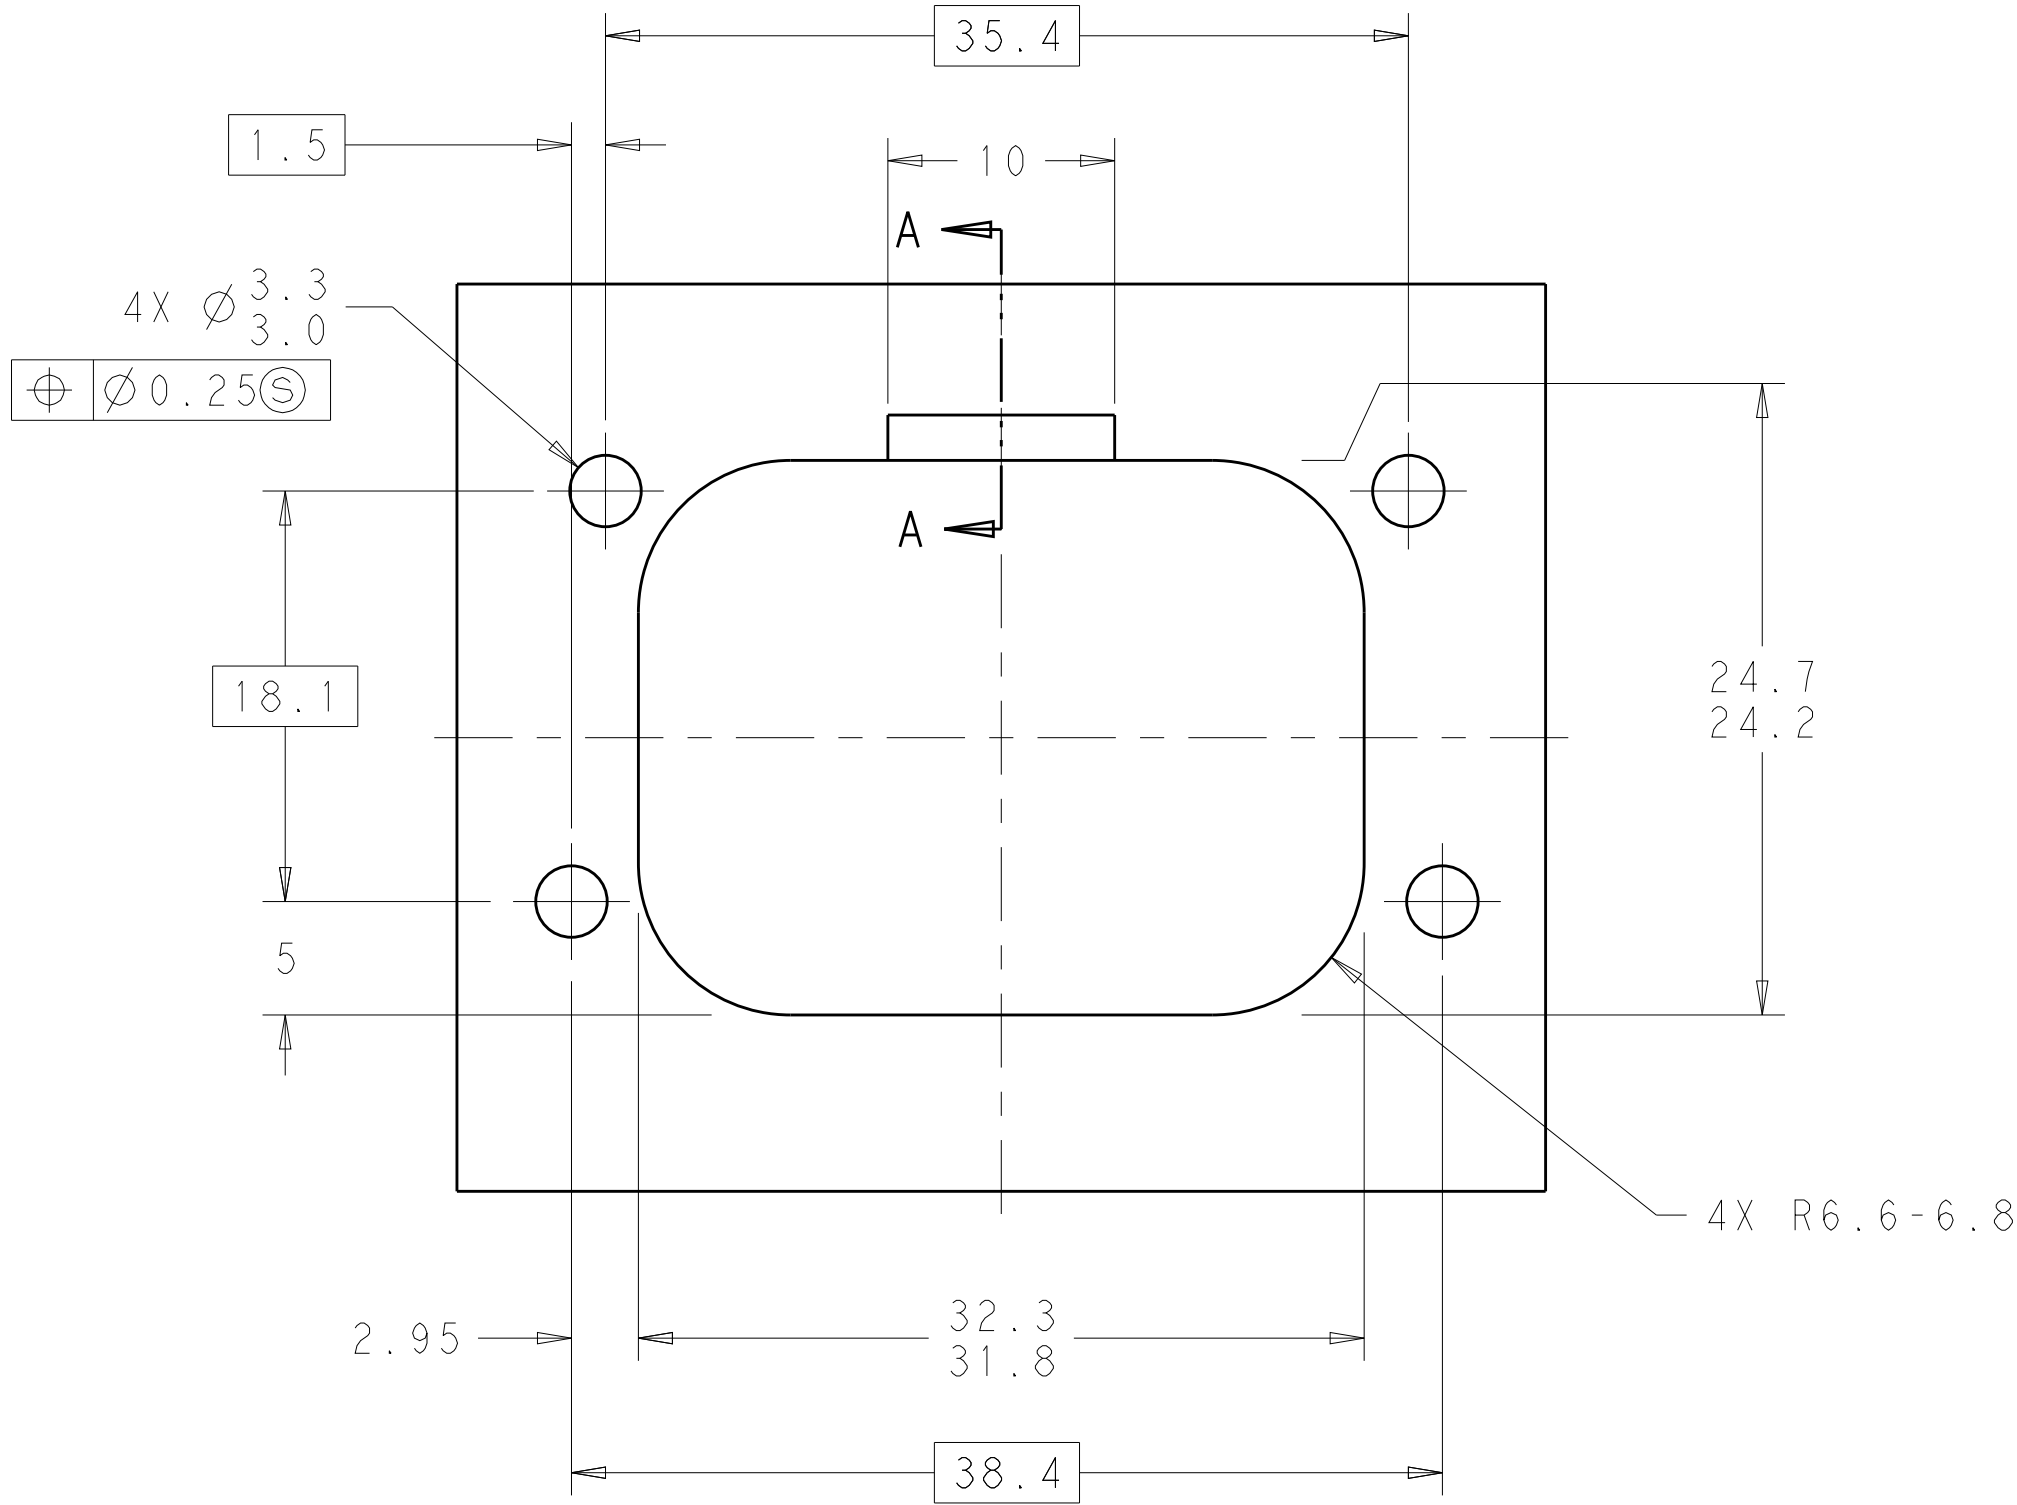




RECOMMENDED MOUNTING HOLE LAYOUT
FOR 5.0 MAX THICK PANEL

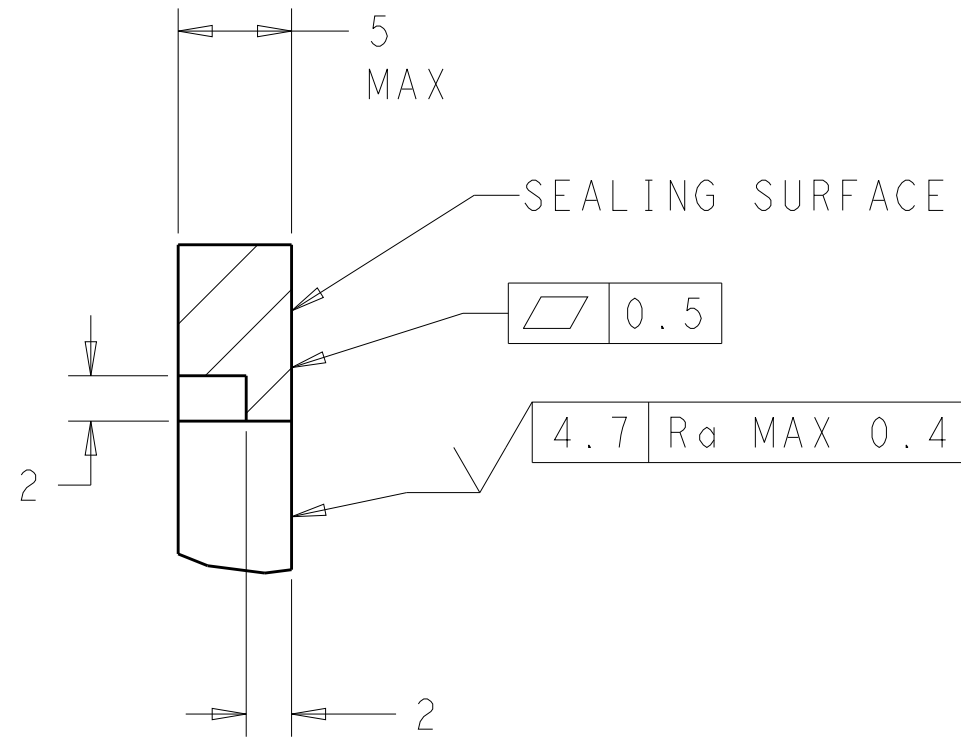


SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

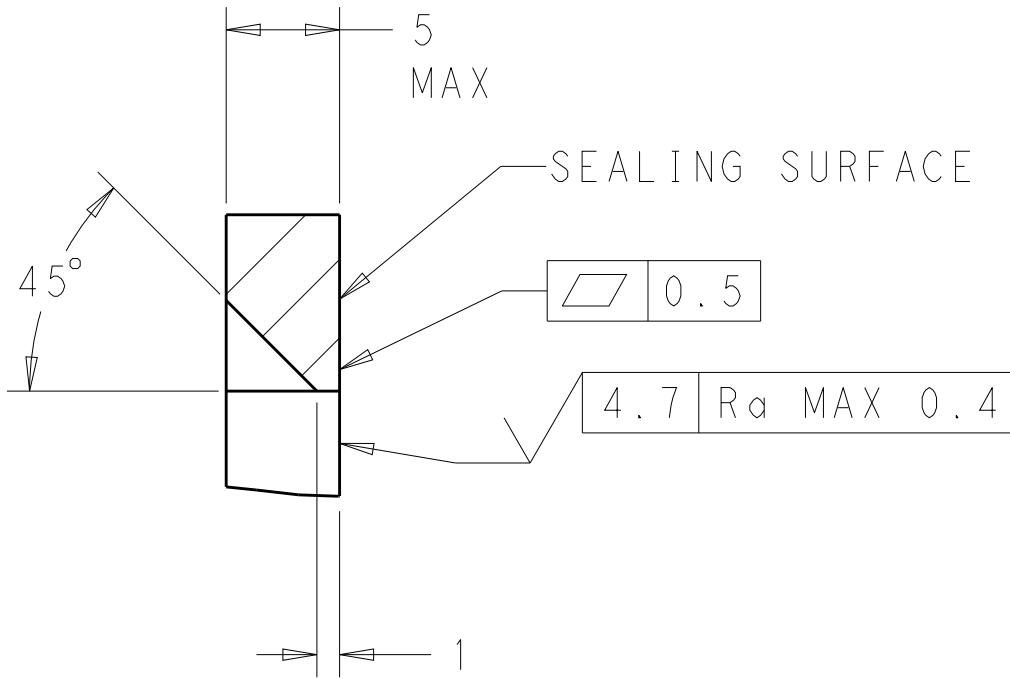


SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

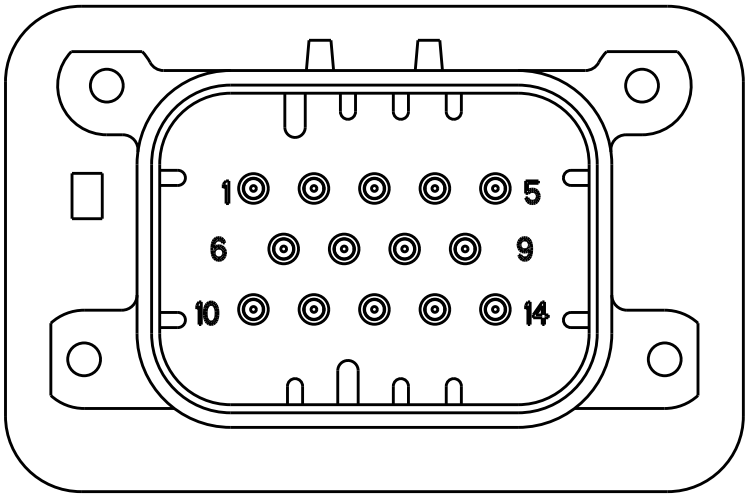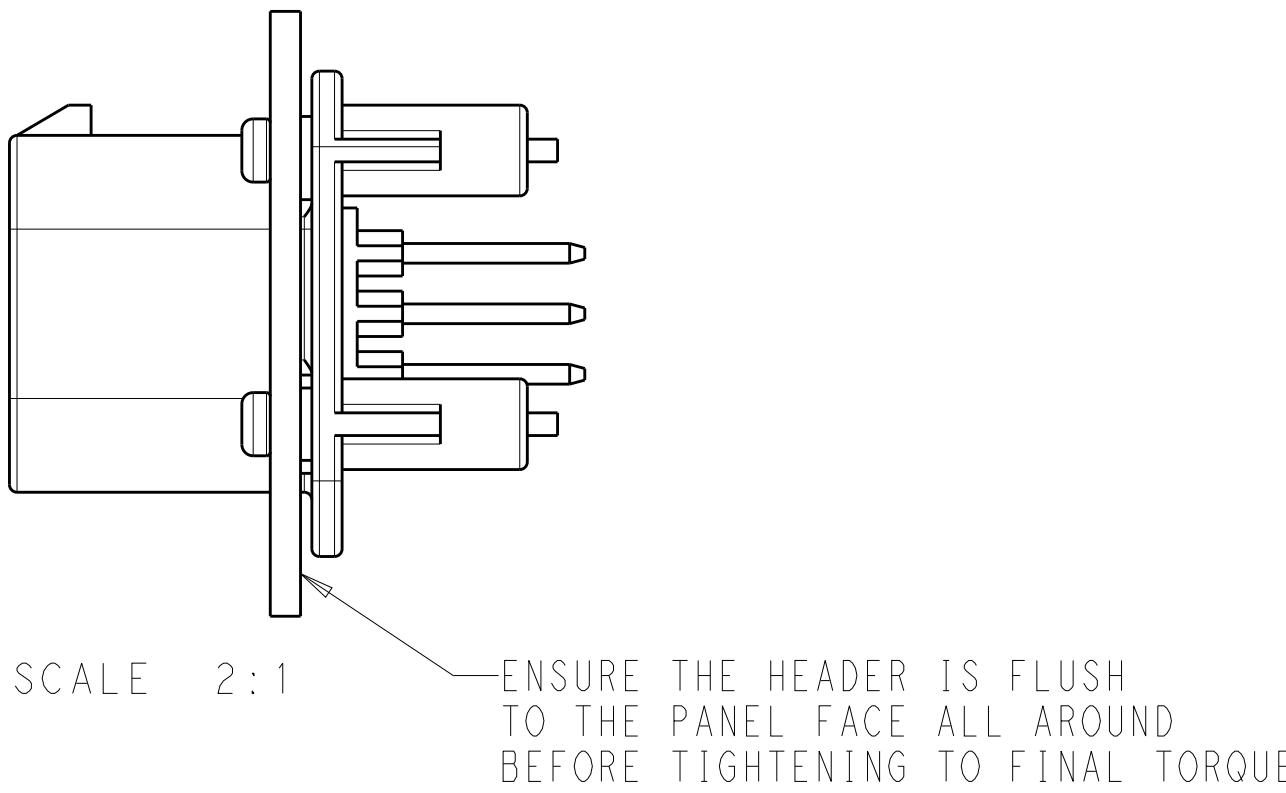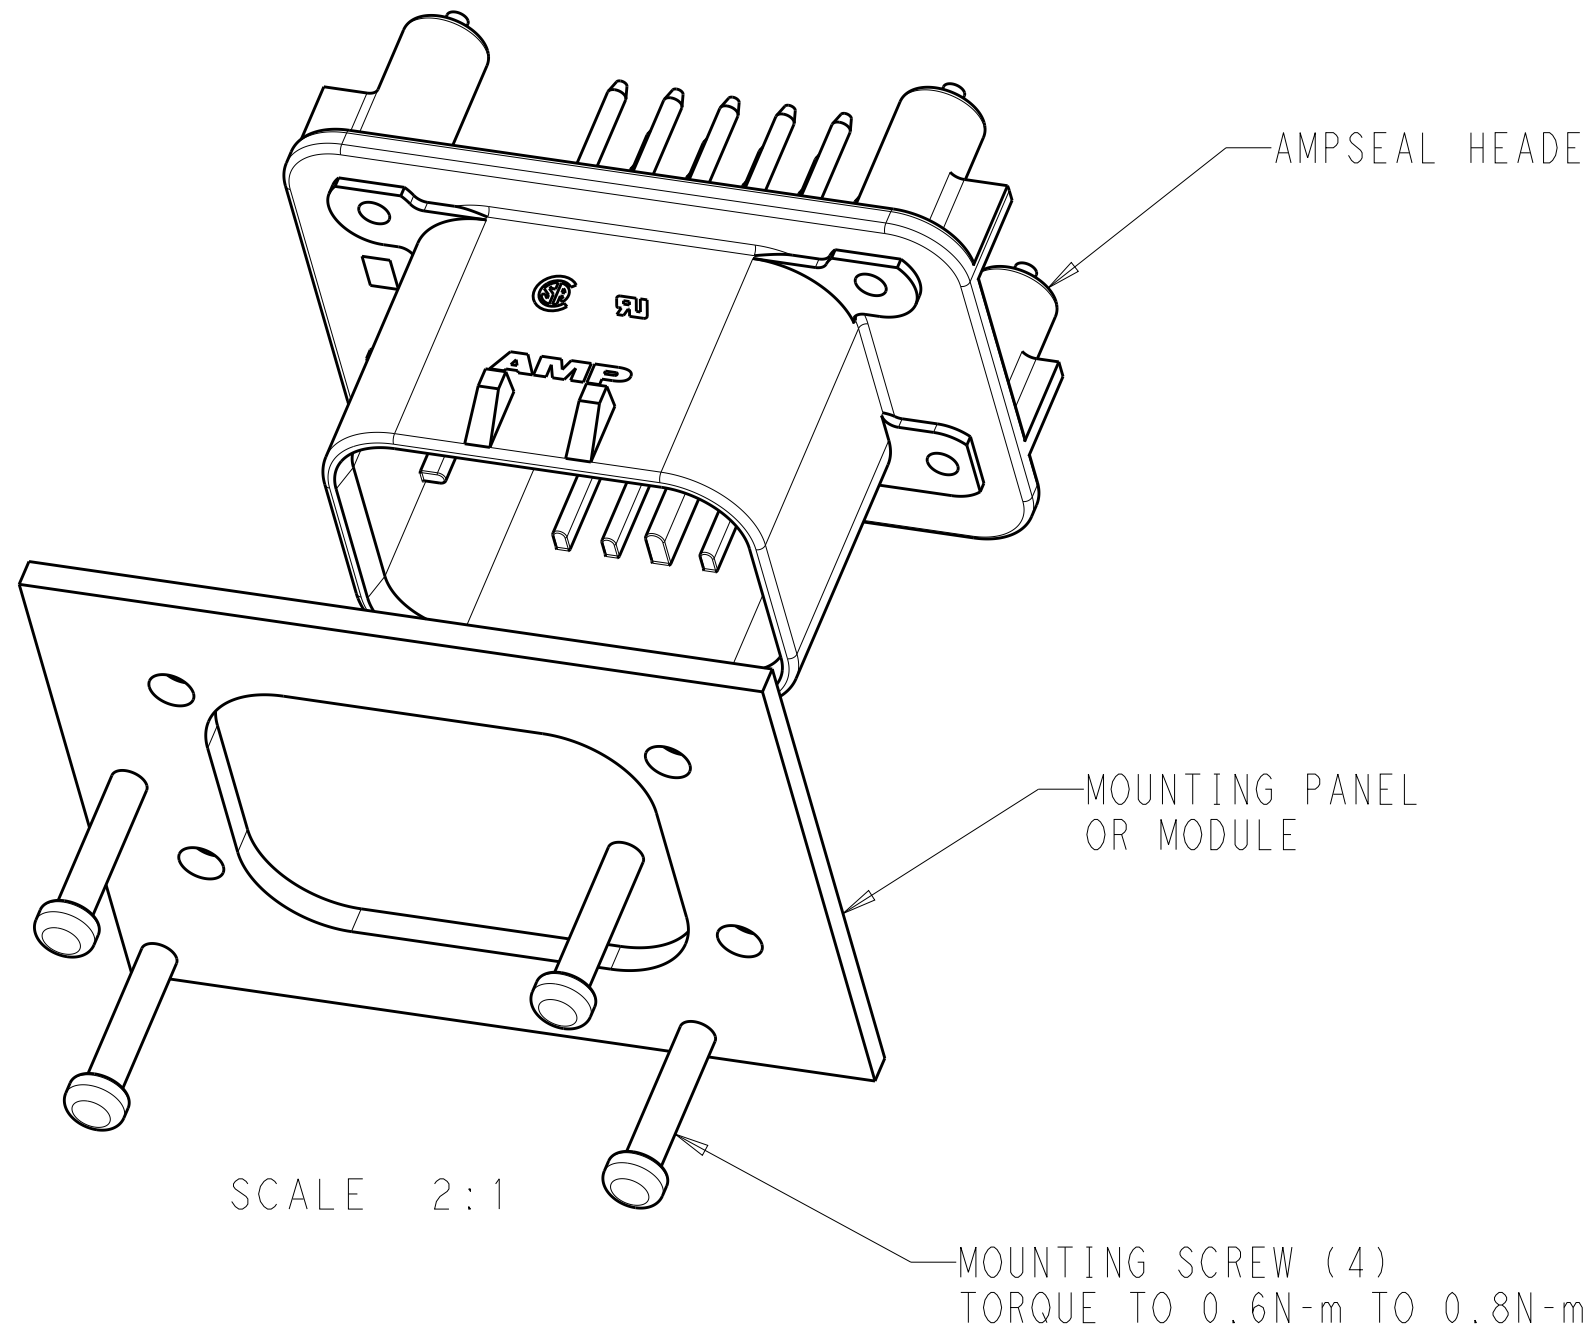

776261-2 & 1-776261-2
KEY LOCATION
SCALE 2:1

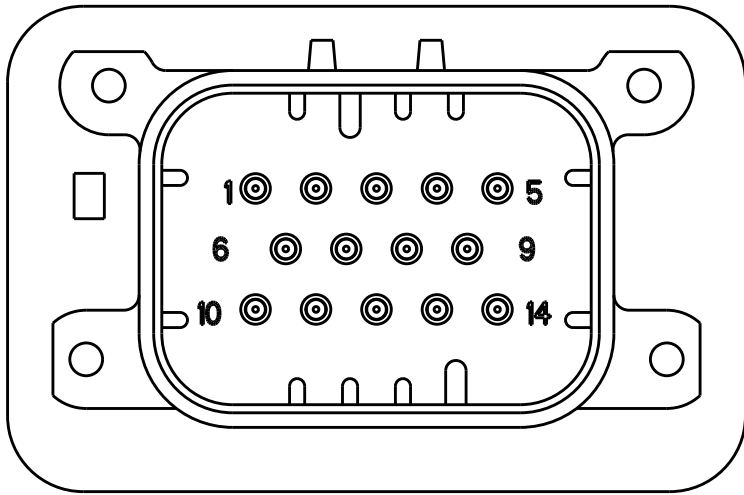

776261-4 & 1-776261-4
KEY LOCATION
SCALE 2:1

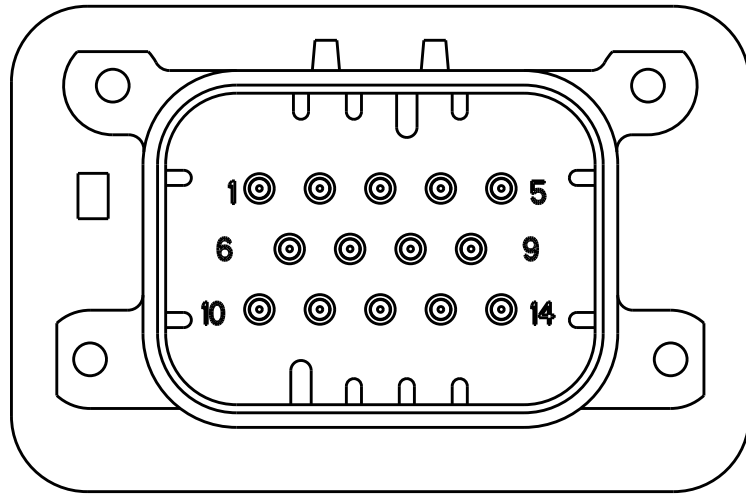

776261-5 & 1-776261-5
KEY LOCATION
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: D. STRAUSSER 04FEB2010 CHK: D. STRAUSSER 27MAR2010 APVD: D. STRAUSSER	TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	
mm	0 PLC ±.2 1 PLC ±0.2 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±°	108-1329	HEADER ASSEMBLY, 14 POSITION, VERTICAL, AMPSEAL	
MATERIAL	FINISH	APPLICATION SPEC	SIZE	RESTRICTED TO
-	-	114-16016	A100779C=776261	-
-	-	WEIGHT	CAGE CODE	DRAWING NO
-	-	CUSTOMER DRAWING	SCALE 4:1	SHEET 2 OF 2 REV A7

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru