

NOTES:

1. MATERIALS AND FINISHES:

BODY, BULLET, SLEEVE, FERRULE,
LOCK WASHER, HEX NUT
CONTACT
INSULATOR
GASKETS

- BRASS, GOLD PLATING
- BERYLLIUM COPPER, GOLD PLATING
- PTFE
- SILICONE RUBBER

2. ELECTRICAL:

- A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHz
C. VSWR(RETURN LOSS): 1.22 [-20.08 dB] @3 GHz
1.35 [-16.54 dB] @6 GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

3. MECHANICAL:






- A. DURABILITY: 100 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
C. SEALING REQUIREMENT: WITHSTANDS PRESSURE OF 8 PSI FOR 60 SEC FROM THE INTERFACE IN MOUNTED CONDITION WITHOUT ANY SIGNS OF LEAKAGE

4. PACKAGING:

- A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 132422RP-10, AND DATE CODE"

5. ASSEMBLY INSTRUCTIONS:

- A. STRIP CABLE PER RECOMMENDED DIMENSIONS
- B. ASSEMBLE FERRULE OVER BRAID, AND PULL BRAID BACK OVER FERRULE
- C. ASSEMBLE SLEEVE, INSULATOR AND CONTACT TO CABLE CENTER CONDUCTOR AND SOLDER CONTACT
- D. INSERT CABLE INTO CONNECTOR UNTIL IT BOTTM
- E. CRIMP BODY OVER FERRULE WITH 0.105" HEX

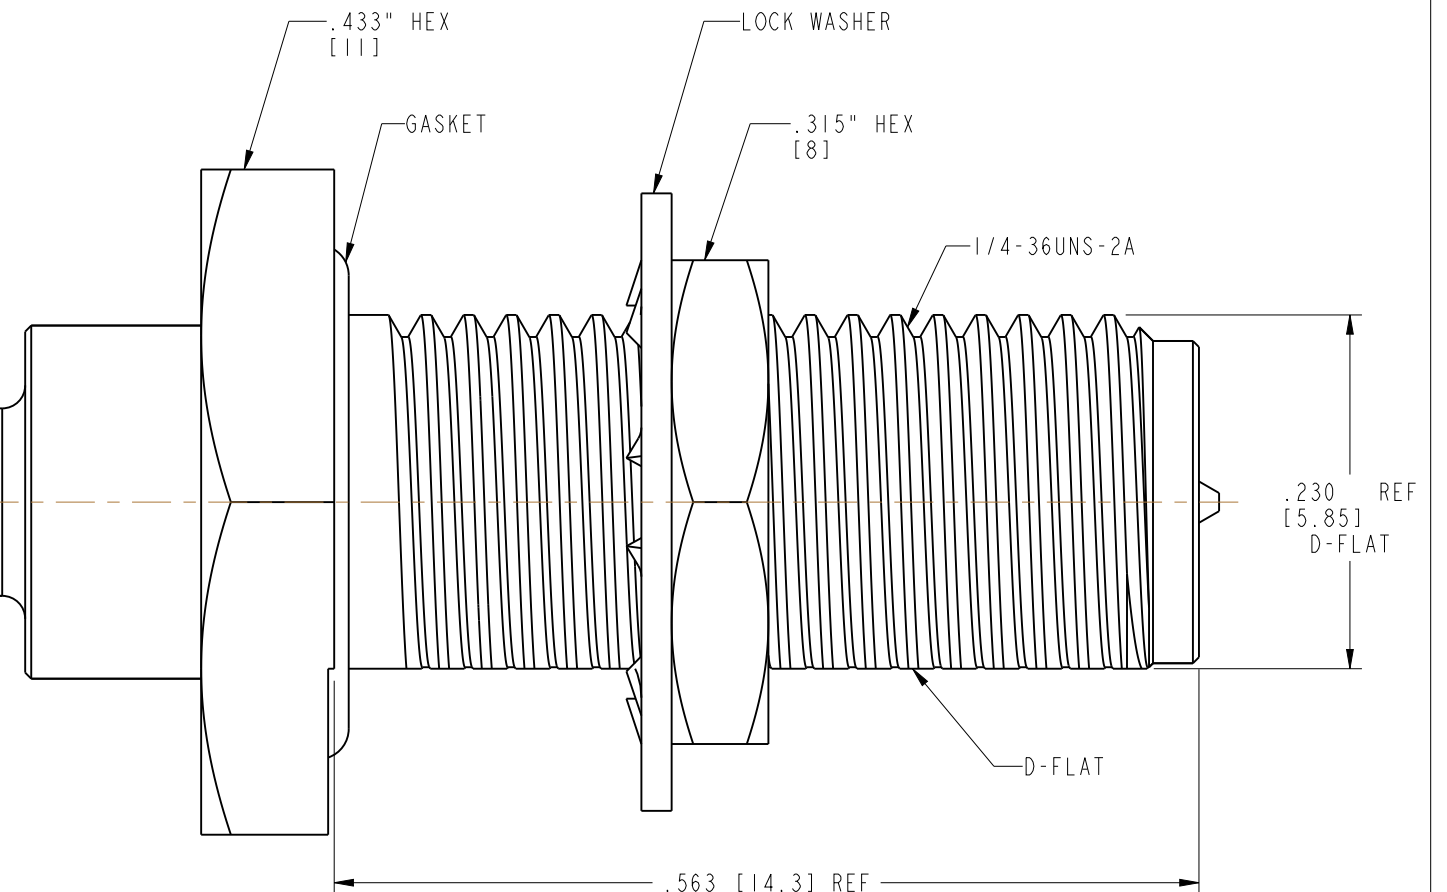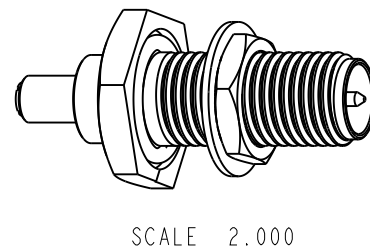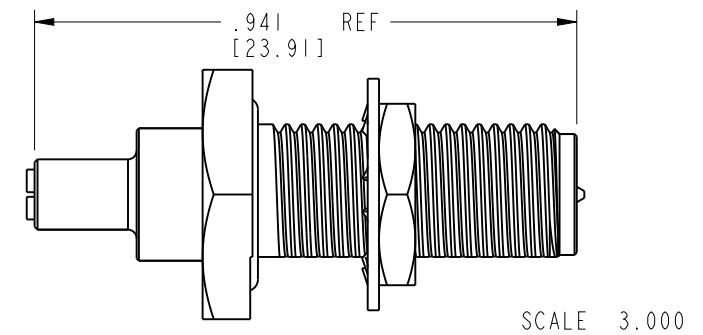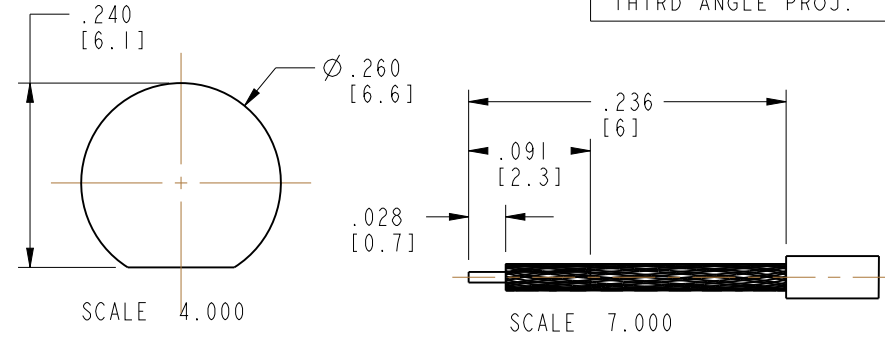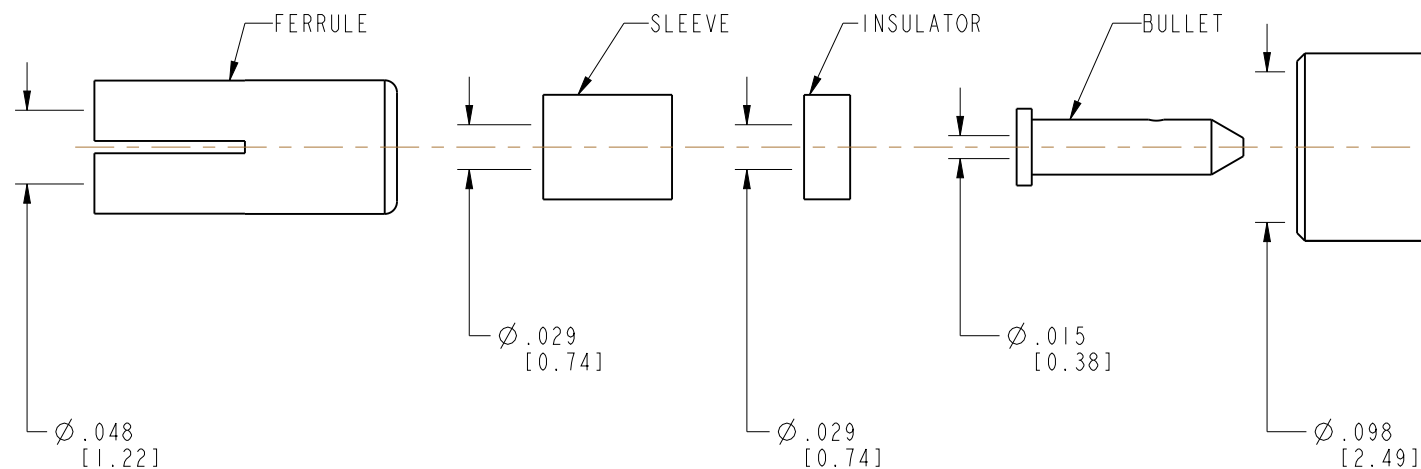

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN M. DEFRANCO	DATE 28-Oct-14	TITLE SMA RP JACK BHD, 1P67 FOR 1.13mm CABLE		Amphenol Connex	
	REFERENCE EAR #6495 REF 132422-10 132422RP	ENGINEER M. DEFRANCO	DATE 28-Oct-14				
		APPROVED B.C. GLEISSNER	DATE 25-Feb-15				
		CAD FILE 132422RP-10		DWG SIZE B	DRAWING NO. 132422RP-10	REV A	
		SCALE: 8.0:1		SHEET 3 OF 3			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru