

Series TB200 & TB200HB

Double Row Terminal Blocks

SPECIFICATIONS

Rating: TB200 – 20A, 300V*

TB200HB – 20A, 600*.

Center Spacing: .437" or 7/16" (11.10 mm)

Wire Size: #12 - 22 AWG CU

Screw Size: #6-32 philslot screws

Torque Rating: 9 in-lb. max.

Distance Between Barriers: .353" (8.97 mm)

Mounting: #6 screws

Materials: Molded base: Black, UL rated 94VO thermoplastic

Terminal plating: Tin over brass; Screws: Zinc plated steel


Operating Temperature: 130°C (260°F) max., -40°C (-40°F) min.

Breakdown Voltage: 4800V rms

Approvals: UL E62622; CSA LR15364; IEC Compliance;

CE Certified


* Max. rating shown; some options may be rated lower - consult factory.

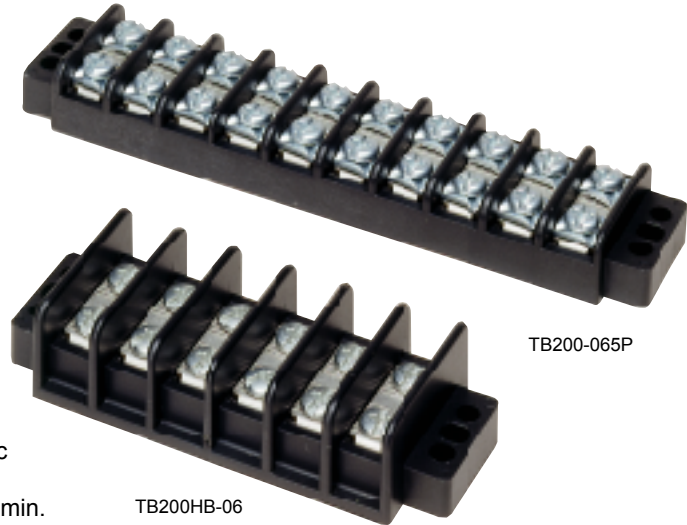


Poles	A	B	Poles	A	B	Poles	A	B
02	1.63	1.31	12	6.00	5.68	22	10.37	10.06
03	2.07	1.75	13	6.44	6.12	23	10.81	10.50
04	2.51	2.18	14	6.87	6.56	24	11.25	10.93
05	2.94	2.62	15	7.31	7.00	25	11.68	11.37
06	3.38	3.06	16	7.75	7.43	26	12.12	11.81
07	3.82	3.50	17	8.19	7.87	27	12.56	12.25
08	4.25	3.93	18	8.62	8.31	28	13.00	12.68
09	4.69	4.37	19	9.06	8.75	29	13.44	13.12
10	5.13	4.81	20	9.50	9.18	30	13.87	13.56
11	5.57	5.25	21	9.94	9.62			

* Dimensions in inches. To convert to millimeters, multiply by 25.4.

TB200

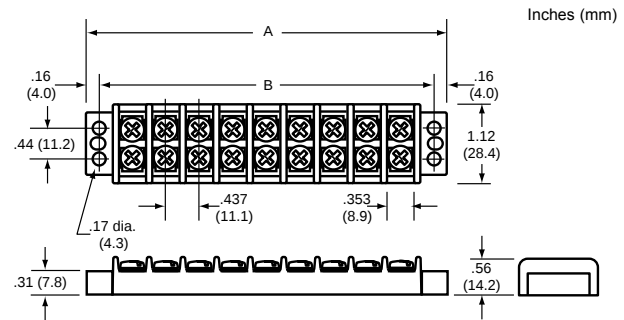

TB200HB

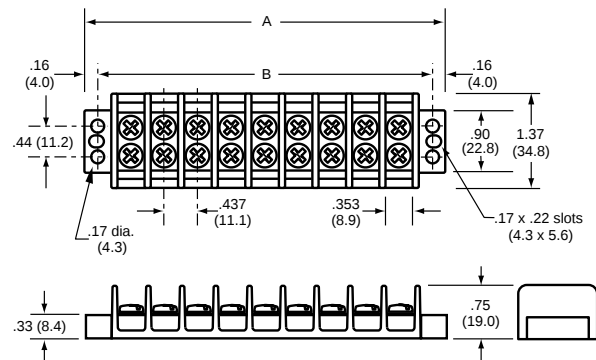

Part Numbering System

Series

TB200 - Standard
TB200HB - High barrier

Poles

02 to 30

Screw Options

Blank - std. screws
00 - screws shipped bulk
B - brass philslot, nickel plated
BS - brass Sems philslot, zinc plated
SP - steel Sems philslot, zinc plated
ST - stainless steel, philslot

Marking

L1 to L6 - std. marking
Marker strips (pg 33)
Covers (pg 32)

Hardware Options

QC1 to QC20 - quick connects

Screw Options



B
Brass Philslot
Nickel Plated



BS
Brass SEMS
Philslot Nickel Plated




SP
Steel SEMS
Philslot Zinc Plated



ST
Stainless Steel
Philslot

Hardware Options

Quick Connects – Assembled Terminals .250" x .031". Max. current rating 20 Amps. For other orientations, contact factory.



QC1




QC2




QC3




QC4



QC5



QC6



QC7




QC8




QC9




QC10



QC11



QC12




QC13



QC14




QC15




QC16




QC17



QC18



QC19



QC20


Quick Connects – Bulk Min. order per part no. – 100 pieces.



QC201
Flat – none



QC202
QC 45° – none



QC203
QC 90° – none



QC204
Flat – Flat



QC205
Flat – QC 45°



QC206
Flat – QC 90°



QC207
QC 45° – QC 45°



QC208
QC 45° – QC 90°




QC209
QC 90° – QC 90°

Jumpers – Bulk Min. order per part no. – 100 pieces. Contact factory for jumper assembly.



J201
Flat slip-on
(not available on
TB200HB)



OJ3
Slip-on over barrier



OJ7
Closed over barrier

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru