
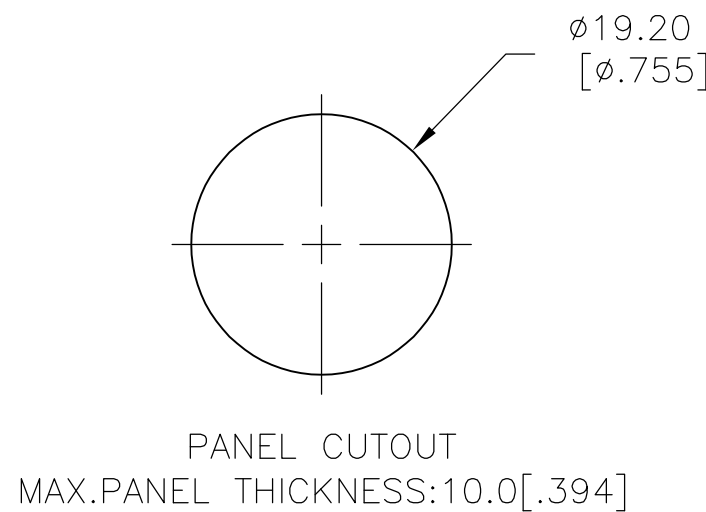
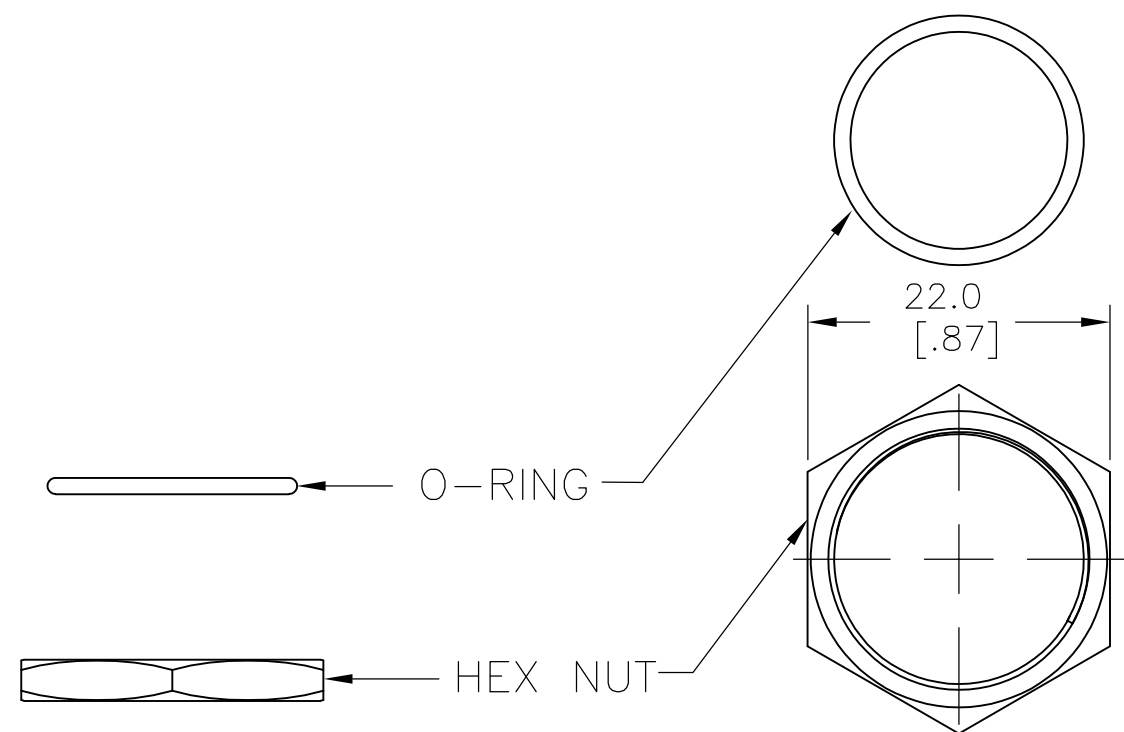
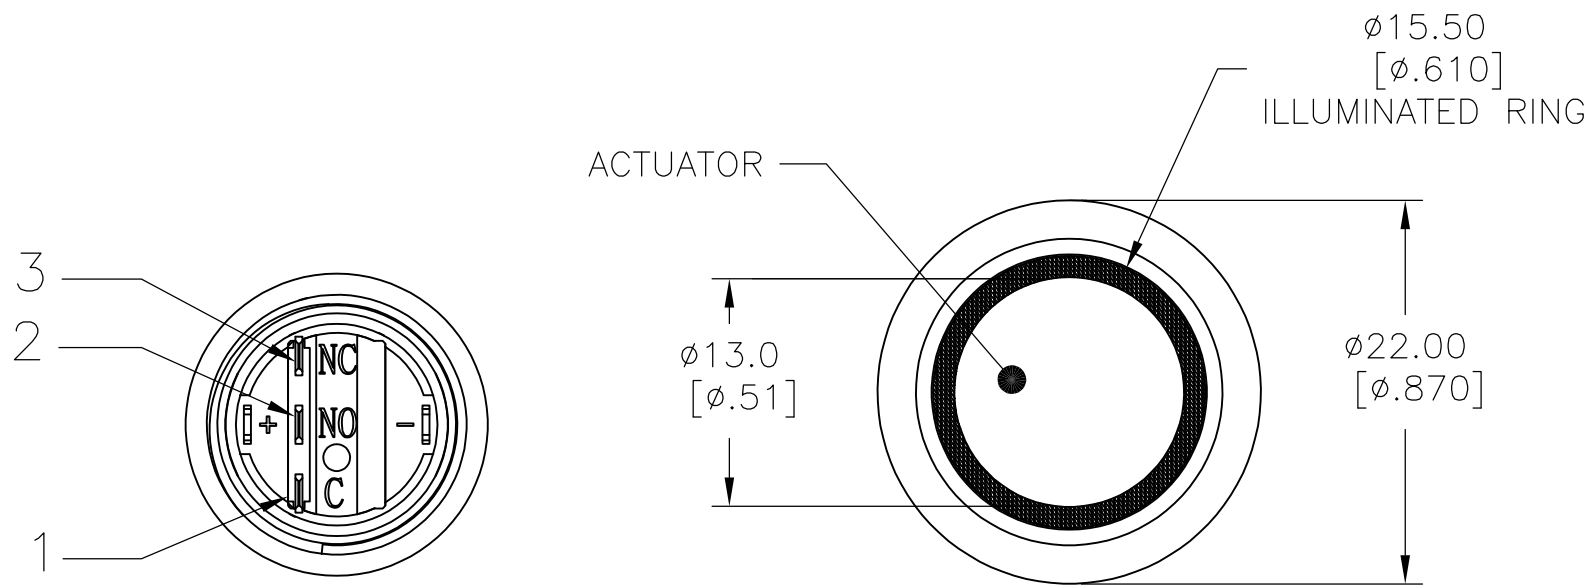
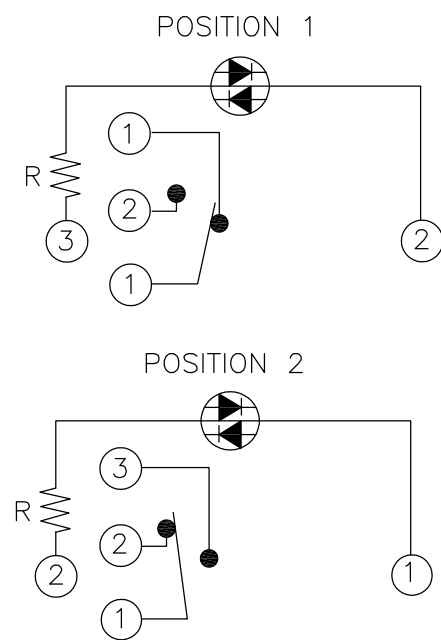
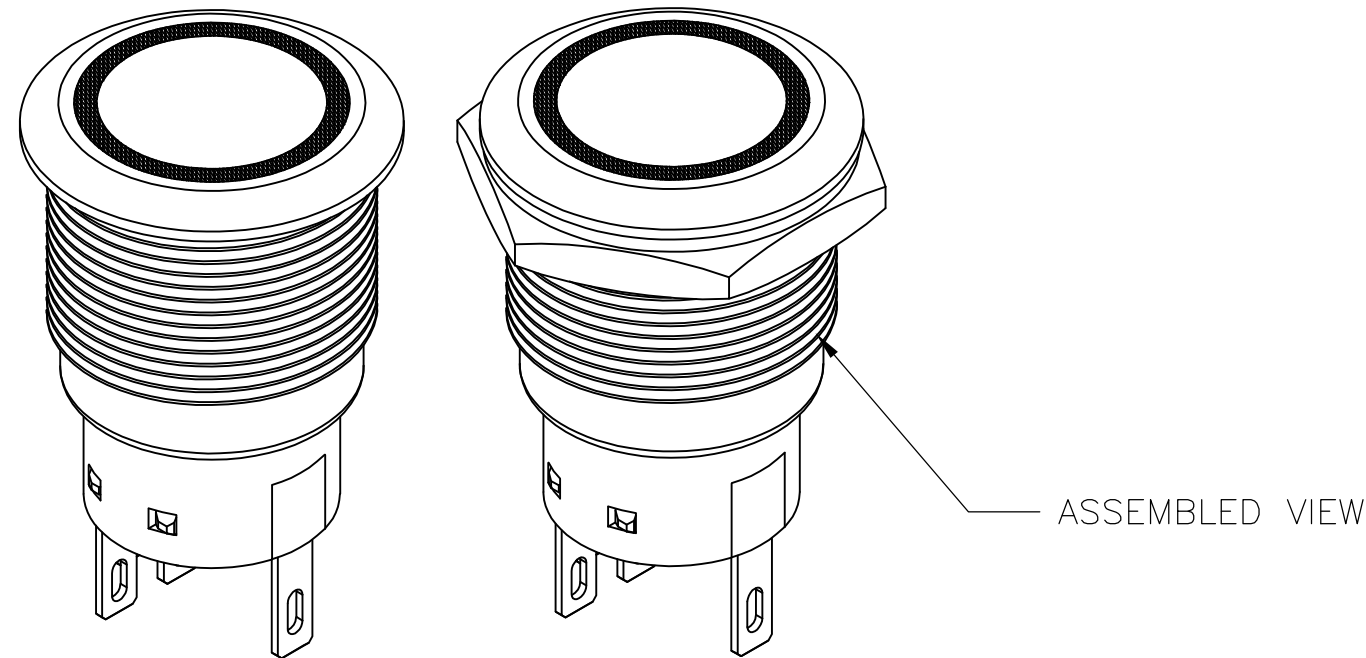


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	06FEB2016	NK	RH

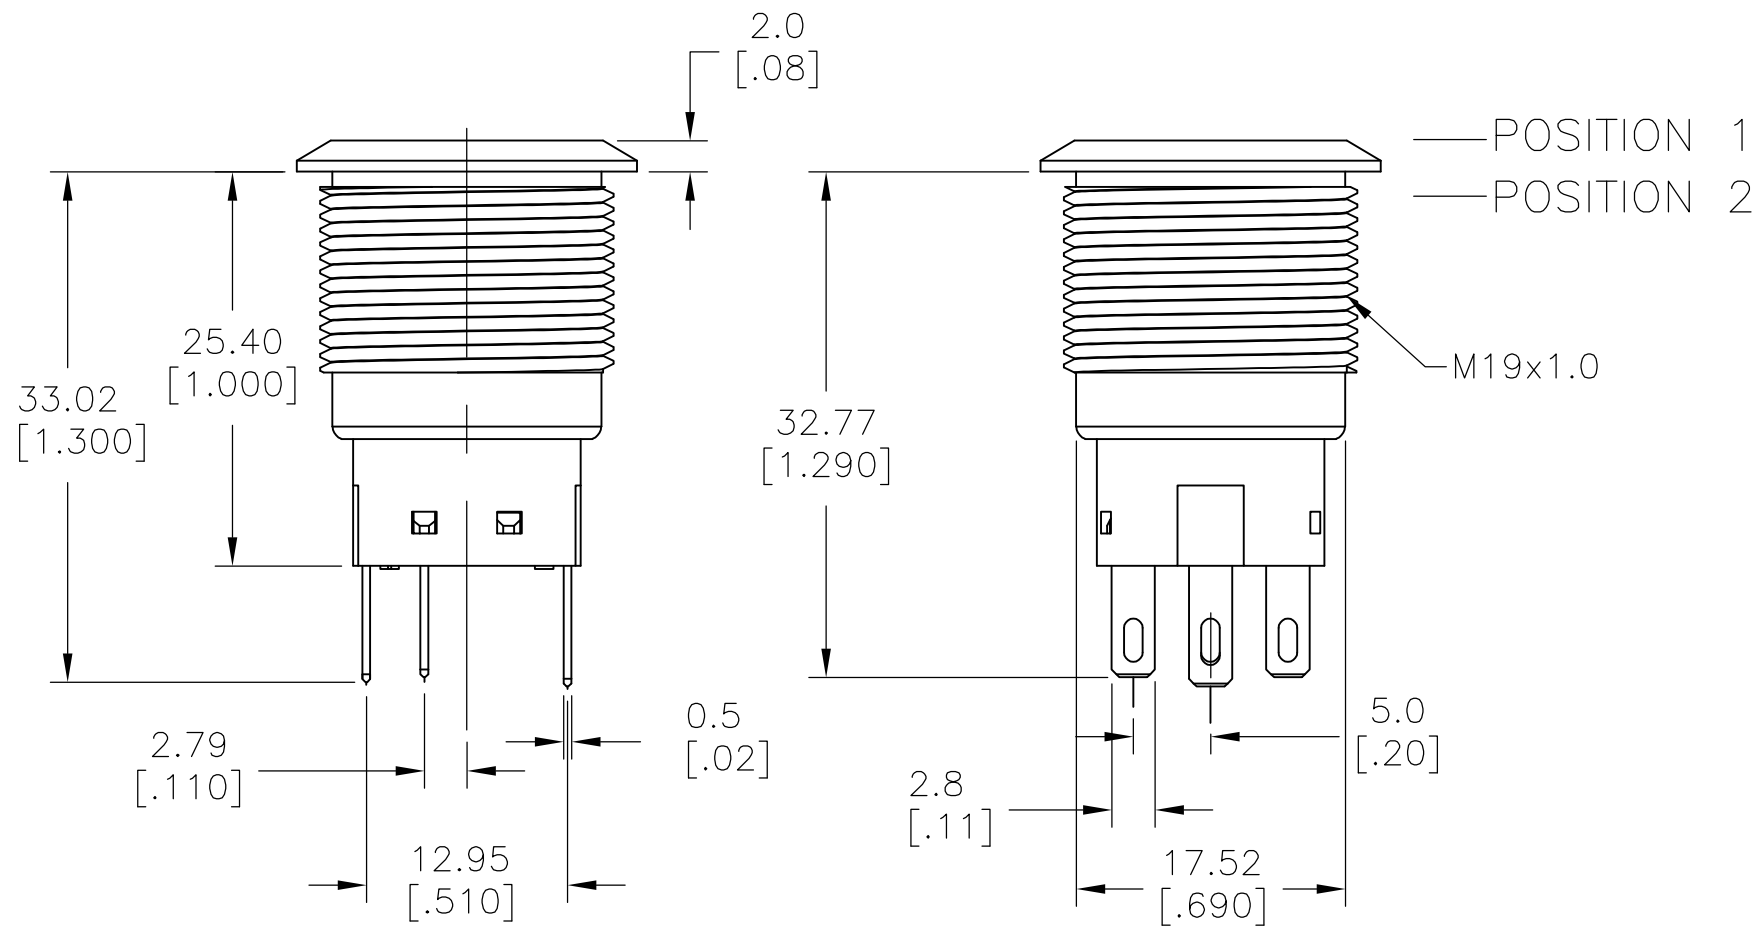

SPECIFICATIONS

CONTACT RATING: SILVER: 3A @ 250 VAC RESISTIVE
GOLD: 0.4VA @ 20VDC OR PEAK AC
INSULATION RESISTANCE: 1,000MΩ MIN AT 500VDC
DIELECTRIC STRENGTH: 2,000V RMS @ SEA LEVEL
CONTACT RESISTANCE: 50 mΩ MAX @ 1A 12VDC (INITIAL VALUE)
ELECTRICAL LIFECYCLES: 50,000 MAKE AND BREAK CYCLES
AT FULL LOAD

ACTUATION FORCE: SP: 2.5±1 NEWTON, DP: 3.5±1 NEWTON
ACTUATION TRAVEL: 3.2MM
SEALED PER IP67, IK10 (STAINLESS)
OPERATING TEMPERATURE: -20°C TO +55°C
MECHANICAL LIFECYCLES: MOMENTARY: 1,000,000 CYCLES
LOCKING: 500,000 CYCLES
HARDWARE TORQUE: 5-14 N-m

MATERIALS

BUSHING: STAINLESS STEEL
BASE: PBT (UL 94-V0), PC (UL 94-V2)
ACTUATOR: STAINLESS STEEL, PC
SEALING: O-RING (SILICONE)
TERMINAL/CONTACT: COPPER BASE, SILVER/GOLD PLATED
HEX NUT: BRASS BASE, NICKEL PLATED

- 1 ALL MATERIAL AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 06FEB2016	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL RYAN 06FEB2016				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HILL RYAN 06FEB2016	NAME ANTI-VANDAL SWITCH 19mm FIXED RING LED			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	SIZE A2			
MATERIAL -		FINISH -	CAGE CODE 00779			
		WEIGHT -	DRAWING NO 2213764			
		CUSTOMER DRAWING	RESTRICTED TO -			
		SCALE 1:1	SHEET 1 OF 4			
			REV A			





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D



C

B

A

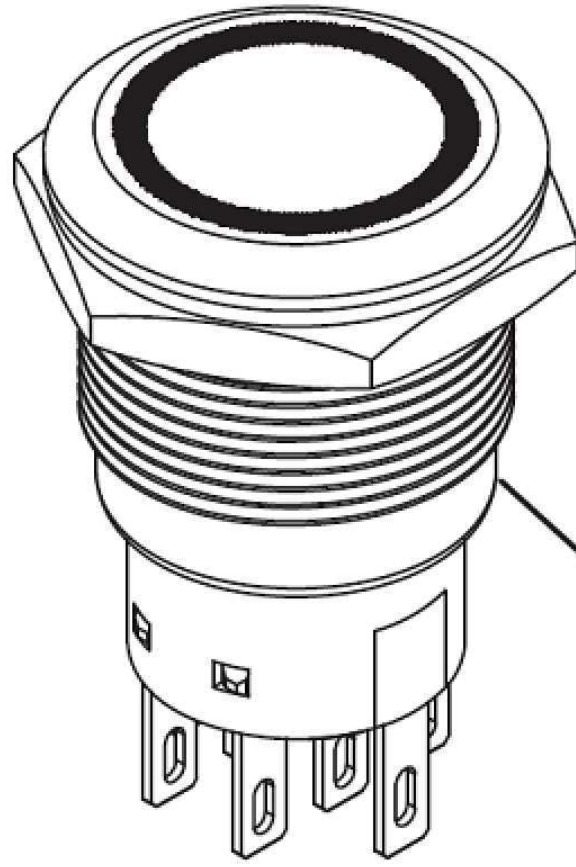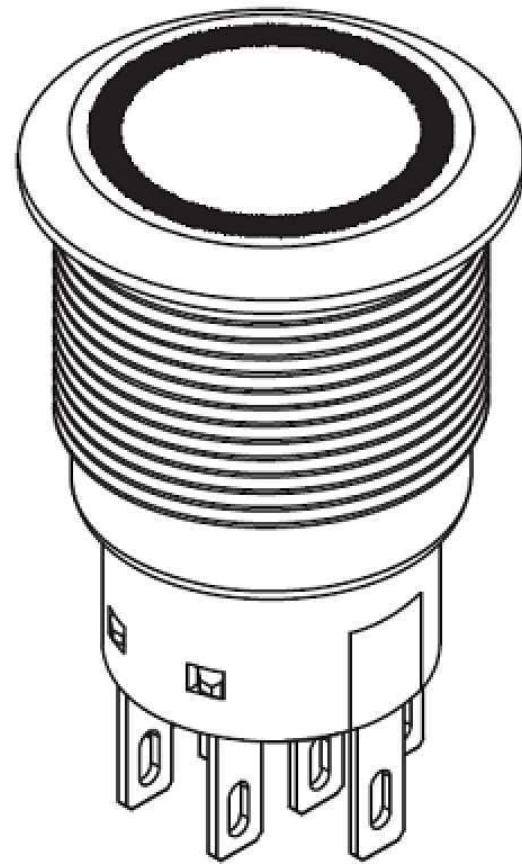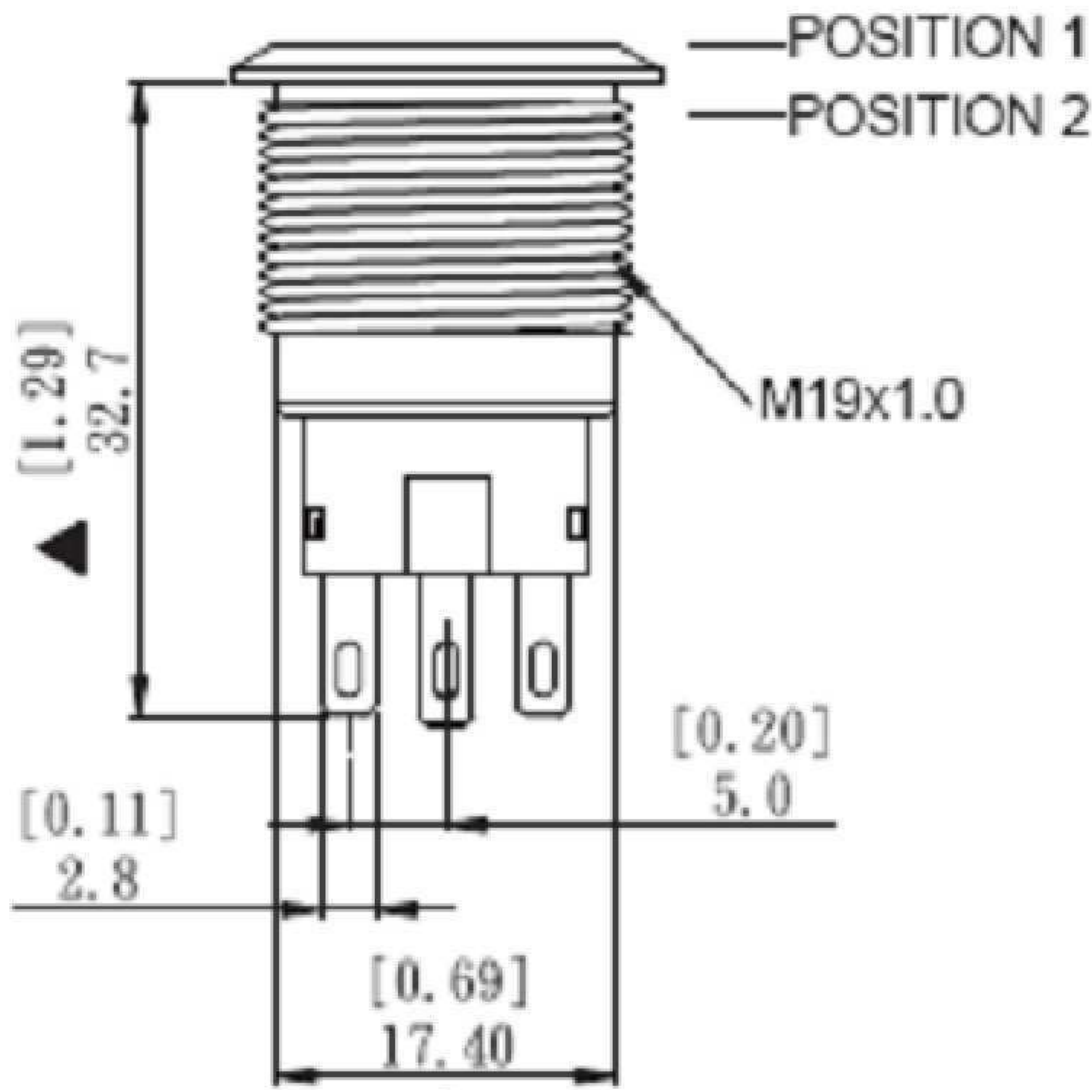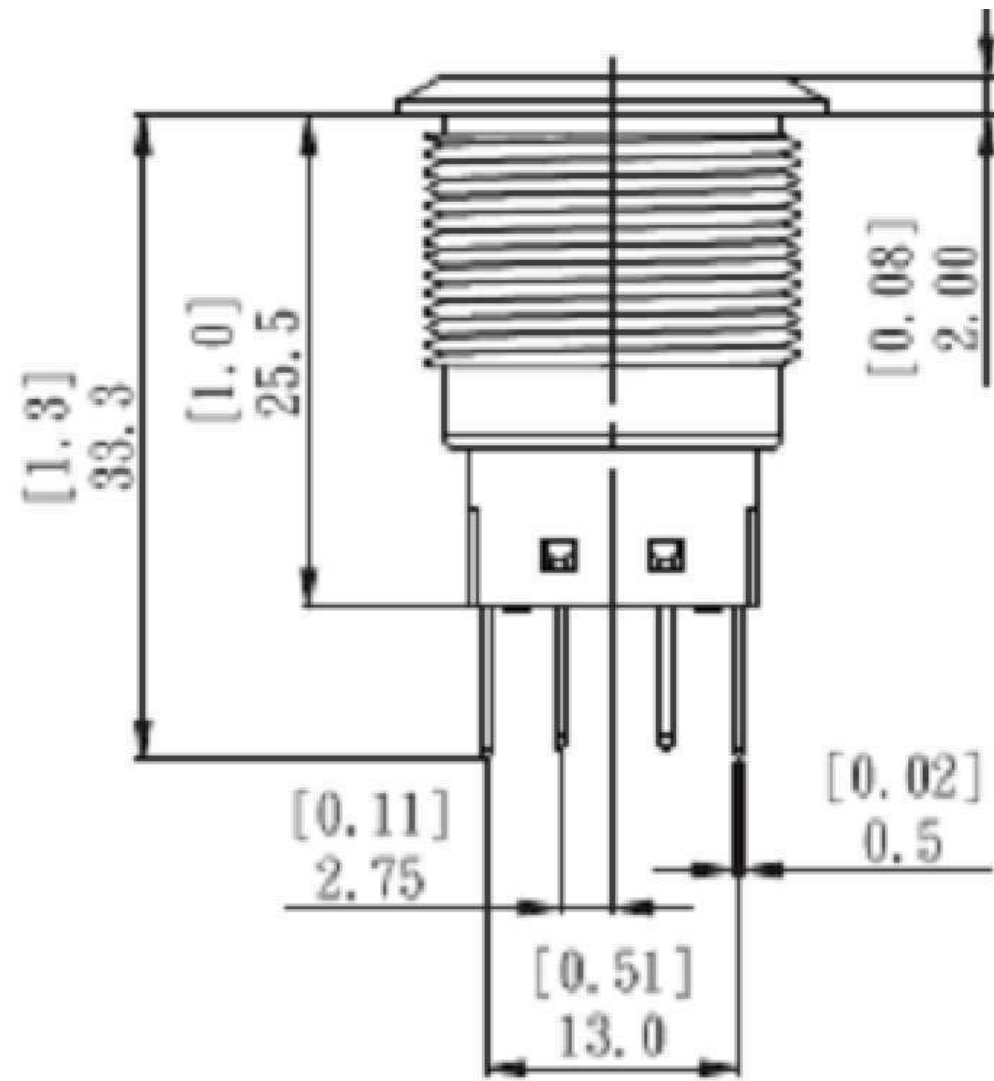

ASSEMBLED VIEW

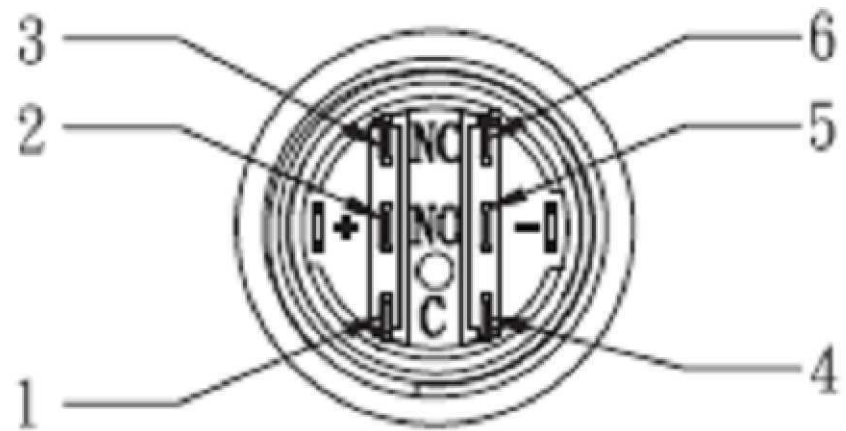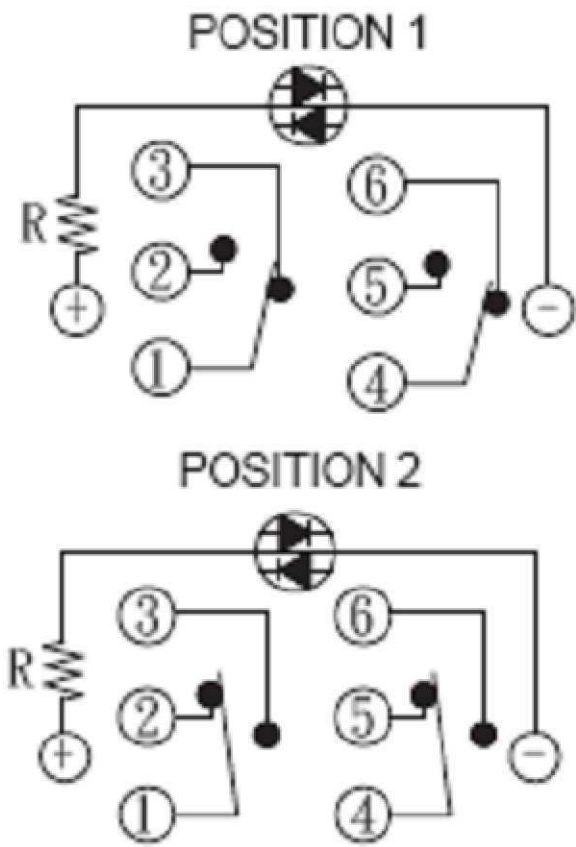

D

C

B

A

2213764

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 06FEB2016	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL RYAN 06FEB2016				
		APVD HILL RYAN 06FEB2016	NAME ANTI-VANDAL SWITCH 19MM FIXED RING LED			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE A2		CAGE CODE 00779	DRAWING NO C=2213764
MATERIAL -		WEIGHT -	SCALE 1:1		SHEET 2 OF 4	REV A
FINISH -		CUSTOMER DRAWING	RESTRICTED TO -			

4		3		2		1						
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		-		-						
© COPYRIGHT - By -		ALL RIGHTS RESERVED.				REVISIONS						
P	LTR	DESCRIPTION		DATE	DWN	APVD						
	-	SEE SHEET 1		-	-	-						
SINGLE POLE-LOCKING								GOLD	BLUE	24V	AV1911R724R04	4-2213764-0
								SILVER	BLUE	24V	AV1911R724Q04	3-2213764-9
								GOLD	BLUE	12V	AV1911R712R04	3-2213764-8
								SILVER	BLUE	12V	AV1911R712Q04	3-2213764-7
								GOLD	GREEN	24V	AV1911R624R04	3-2213764-6
								SILVER	GREEN	24V	AV1911R624Q04	3-2213764-5
								GOLD	GREEN	12V	AV1911R612R04	3-2213764-4
								SILVER	GREEN	12V	AV1911R612Q04	3-2213764-3
								GOLD	YELLOW	24V	AV1911R524R04	3-2213764-2
								SILVER	YELLOW	24V	AV1911R524Q04	3-2213764-1
								GOLD	YELLOW	12V	AV1911R512R04	3-2213764-0
								SILVER	YELLOW	12V	AV1911R512Q04	2-2213764-9
								GOLD	RED	24V	AV1911R324R04	2-2213764-8
								SILVER	RED	24V	AV1911R324Q04	2-2213764-7
								GOLD	RED	12V	AV1911R312R04	2-2213764-6
								SILVER	RED	12V	AV1911R312Q04	2-2213764-5
								GOLD	WHITE	24V	AV1911R124R04	2-2213764-4
								SILVER	WHITE	24V	AV1911R124Q04	2-2213764-3
								GOLD	WHITE	12V	AV1911R112R04	2-2213764-2
								SILVER	WHITE	12V	AV1911R112Q04	2-2213764-1
SINGLE POLE-MOMENTARY								GOLD	BLUE	24V	AV1910R724R04	2-2213764-0
								SILVER	BLUE	24V	AV1910R724Q04	1-2213764-9
								GOLD	BLUE	12V	AV1910R712R04	1-2213764-8
								SILVER	BLUE	12V	AV1910R712Q04	1-2213764-7
								GOLD	GREEN	24V	AV1910R624R04	1-2213764-6
								SILVER	GREEN	24V	AV1910R624Q04	1-2213764-5
								GOLD	GREEN	12V	AV1910R612R04	1-2213764-4
								SILVER	GREEN	12V	AV1910R612Q04	1-2213764-3
								GOLD	YELLOW	24V	AV1910R524R04	1-2213764-2
								SILVER	YELLOW	24V	AV1910R524Q04	1-2213764-1
								GOLD	YELLOW	12V	AV1910R512R04	1-2213764-0
								SILVER	YELLOW	12V	AV1910R512Q04	2213764-9
								GOLD	RED	24V	AV1910R324R04	2213764-8
								SILVER	RED	24V	AV1910R324Q04	2213764-7
								GOLD	RED	12V	AV1910R312R04	2213764-6
								SILVER	RED	12V	AV1910R312Q04	2213764-5
								GOLD	WHITE	24V	AV1910R124R04	2213764-4
								SILVER	WHITE	24V	AV1910R124Q04	2213764-3
								GOLD	WHITE	12V	AV1910R112R04	2213764-2
								SILVER	WHITE	12V	AV1910R112Q04	2213764-1
POLE/THROW		CONTACT	LED COLOR	LED VOLTAGE	TE DESCRIPTIVE PN		TE PART NUMBER					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 06FEB2016		TE Connectivity											
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:						CHK HILL RYAN 06FEB2016							
		0 PLC ± -		APVD HILL RYAN 06FEB2016		NAME ANTI-VANDAL SWITCH 19MM FIXED RING LED									
		1 PLC ± -		PRODUCT SPEC											
		2 PLC ± -		APPLICATION SPEC											
		3 PLC ± -		-											
4 PLC ± -		ANGLES ± -		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO					
MATERIAL		FINISH		WEIGHT		A2		00779		C=2213764		-			
CUSTOMER DRAWING				SCALE		1:1		SHEET		3 of 4		REV		A	

4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		-		-	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.					
						REVISIONS	
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	-	SEE SHEET 1		-	-	-	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru