
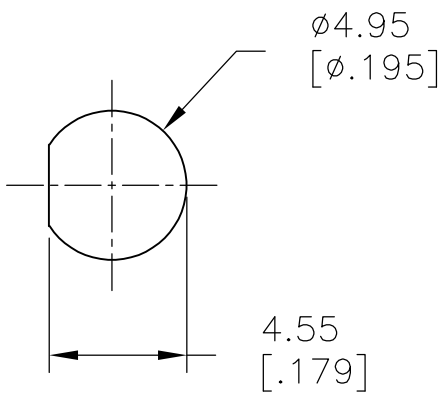



LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	NEW DRAWING PER ECO-14-009318	11JUL2014	NK	RH

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	OFF	ON
TERM. COMM.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

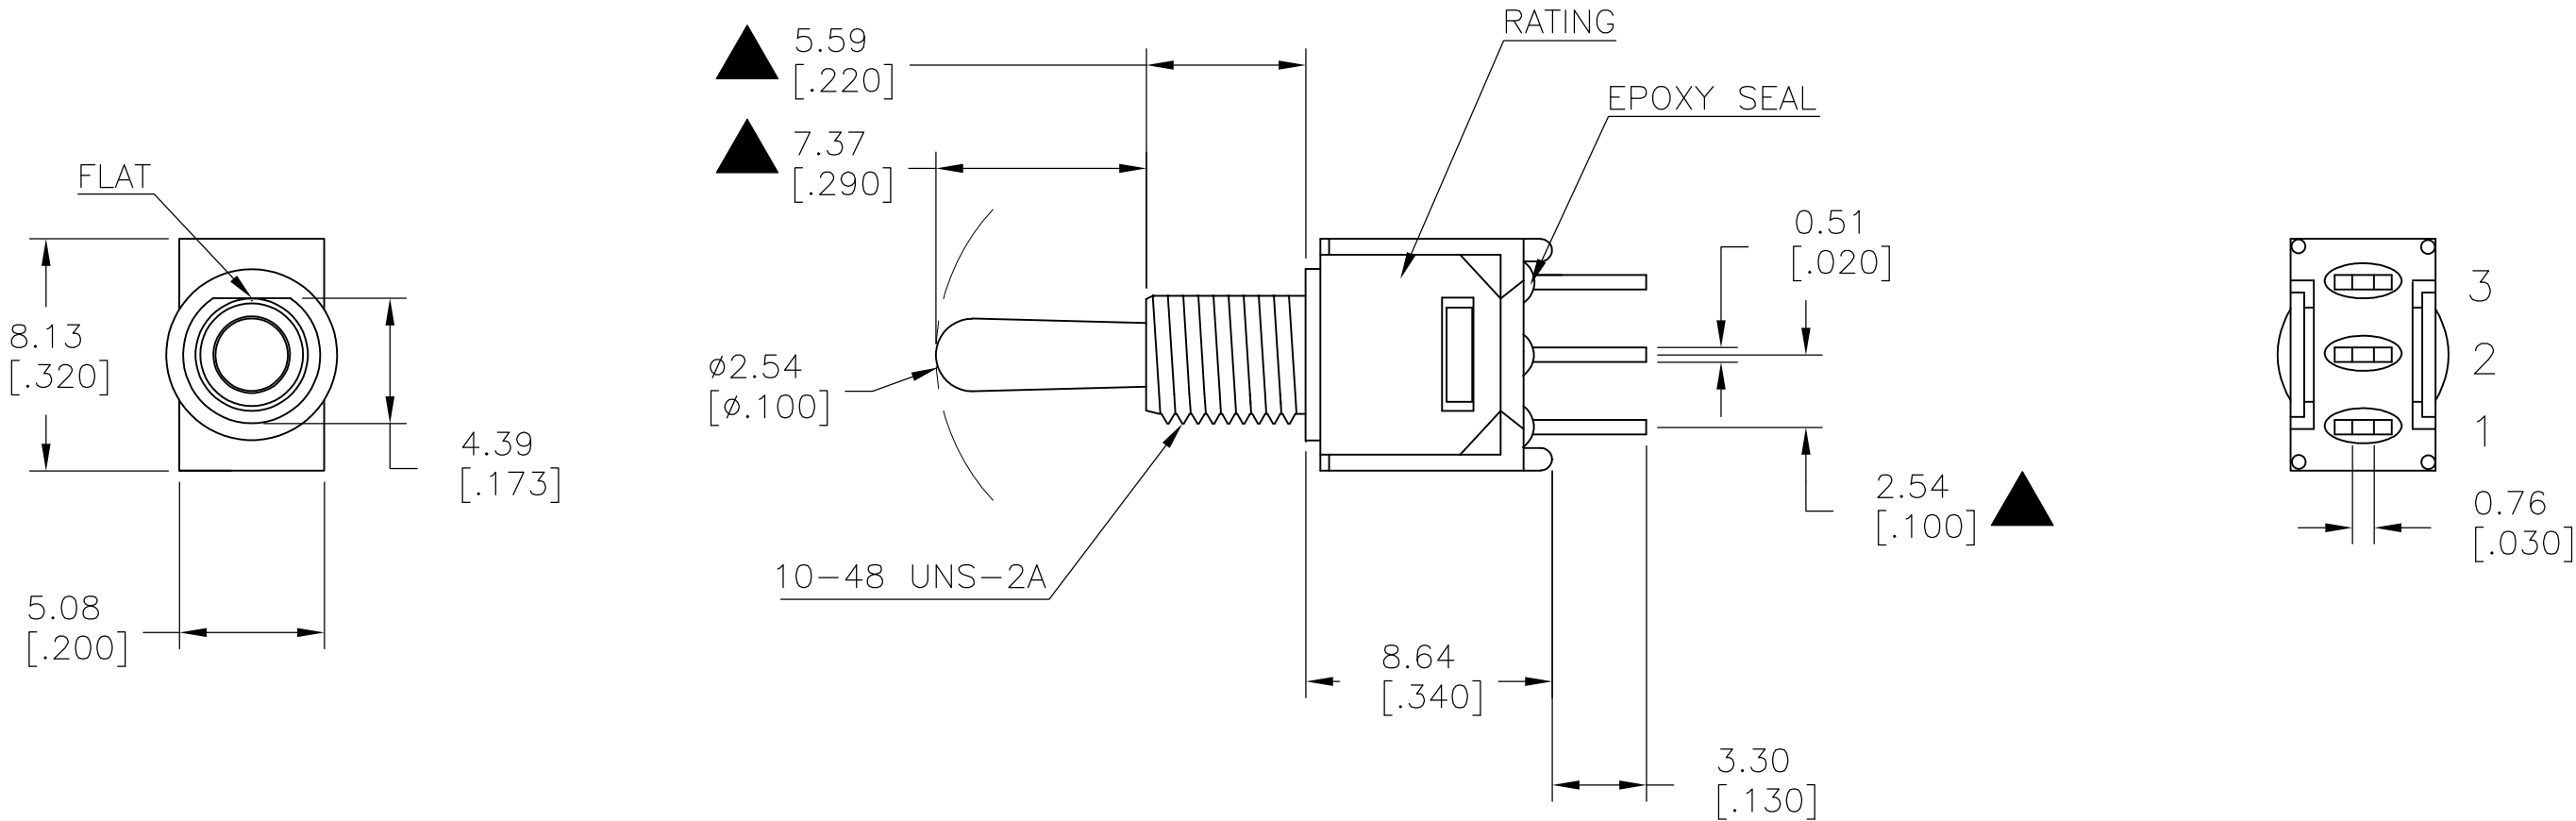

PANEL MOUNTING

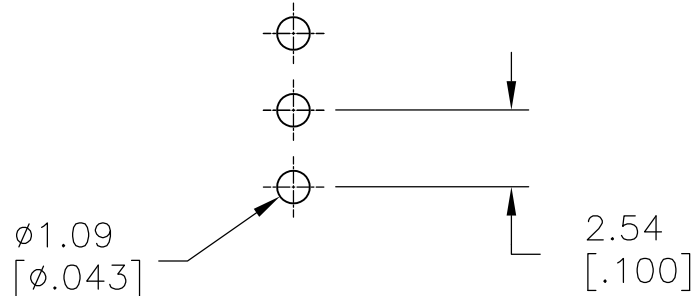

SOLDER LUG

LAYOUT FOR PN 2267079-6

SPECIFICATIONS



- MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR BOTH SILVER AND GOLD PLATED CONTACTS.
- CONTACT RATING: SILVER PLATED: 3A @ 120 VAC OR 28 VDC, 1A @ 250 VAC
GOLD PLATED: 0.4VA MAX @ 20 V MAX (AC OR DC)
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 1,000 Vrms MIN.@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

GOLD	ON-OFF-ON	PC THROUGH-HOLE	VERTICAL	1	2	TMS3T3B1M2RE	2267079-6
SILVER	ON-ON	SOLDER LUG	VERTICAL	2	2	TMD1T3B1M1QE	2267079-5
SILVER	ON-OFF-ON	SOLDER LUG	VERTICAL	1	2	TMS3T3B1M1QE	2267079-4
SILVER	ON-ON	SOLDER LUG	VERTICAL	1	2	TMS1T3B1M1QE	2267079-3
SILVER	OFF-ON	SOLDER LUG	VERTICAL	1	2	TMS6T3B1M1QE	2267079-2
GOLD	ON-ON	WIRE WRAP	VERTICAL	1	2	TMS1T3B1M5RE	2267079-1
CONTACT MATERIAL	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11JUL2014 NAGALAKSHMI K	TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK 11JUL2014 HILL, RYAN					
		APVD 11JUL2014 HILL, RYAN	NAME SUBMINIATURE TOGGLE SWITCH				
		PRODUCT SPEC					
MATERIAL		APPLICATION SPEC	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
-		WEIGHT	A2		00779	C=2267079	-
FINISH		CUSTOMER DRAWING	SCALE		3:1	SHEET	1 of 6
						REV	A

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3,5-6	N/A	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

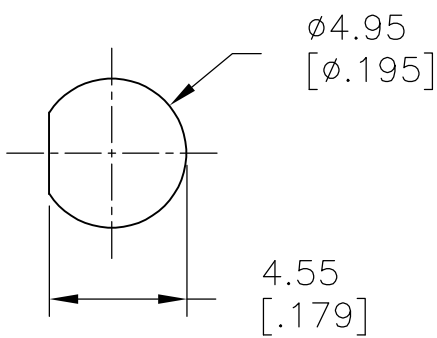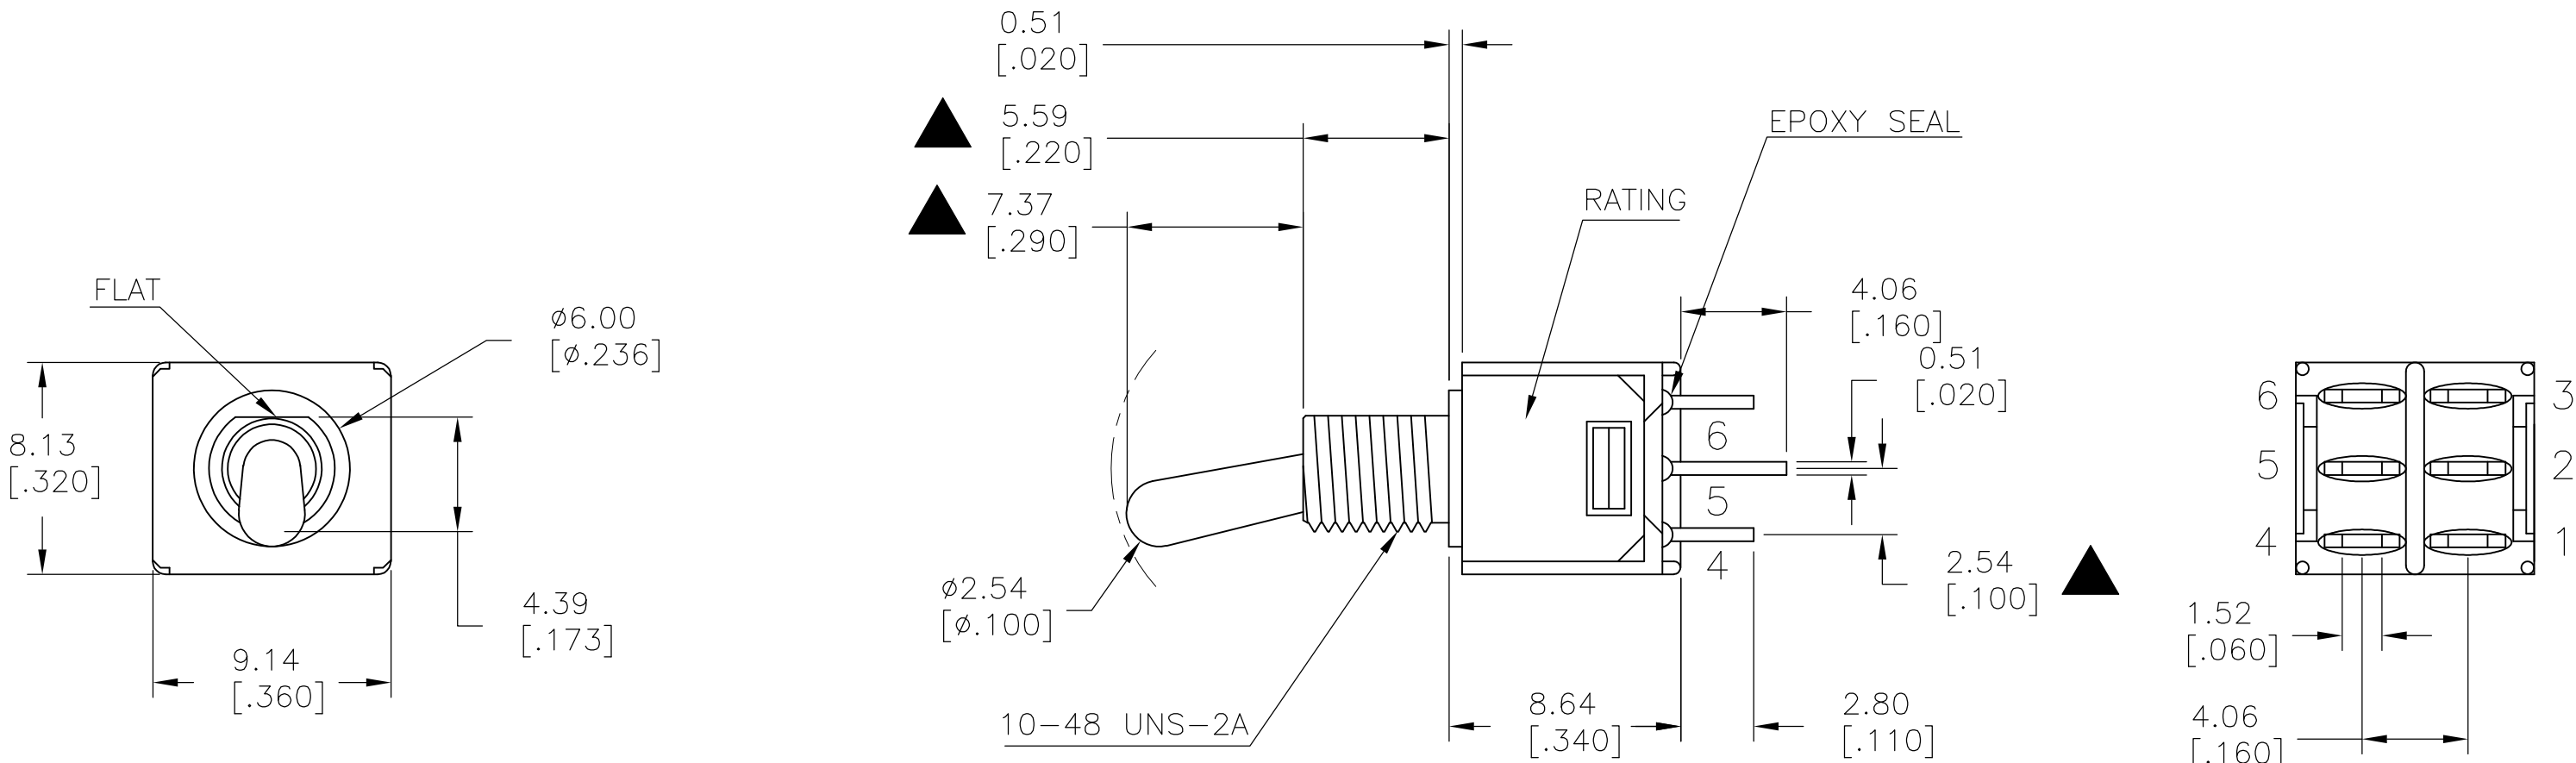

PANEL MOUNTING

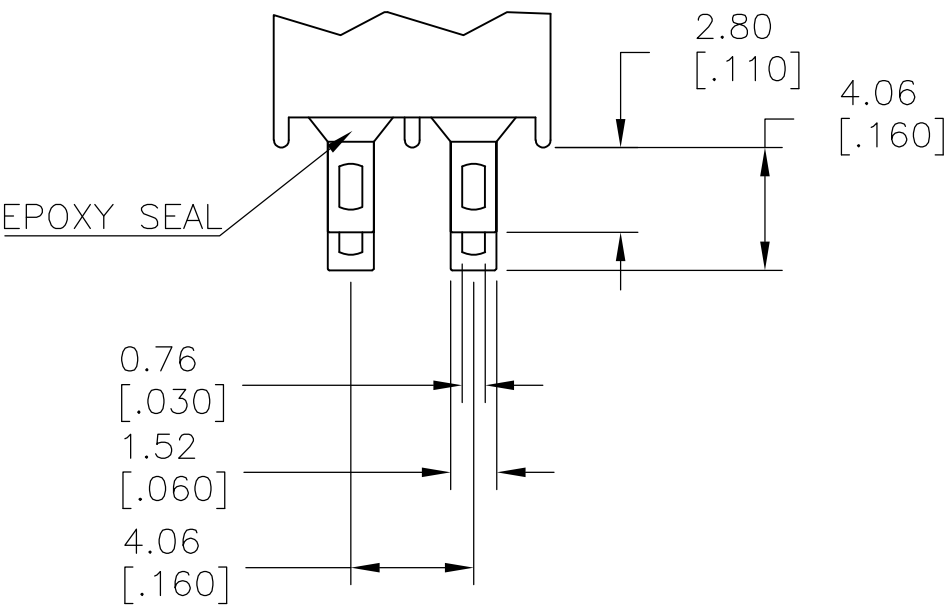



SOLDER LUG

LAYOUT FOR PN 2267079-5


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
—	—	—	—	SEE SHEET 1	—	—

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3	N/A	2-1
SCHEMATIC			

SWITCH FUNCTION

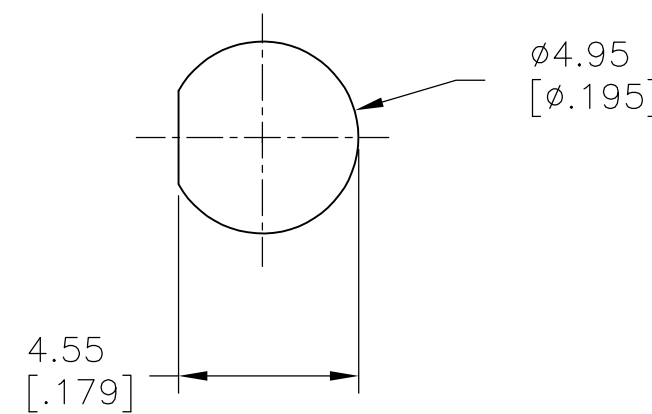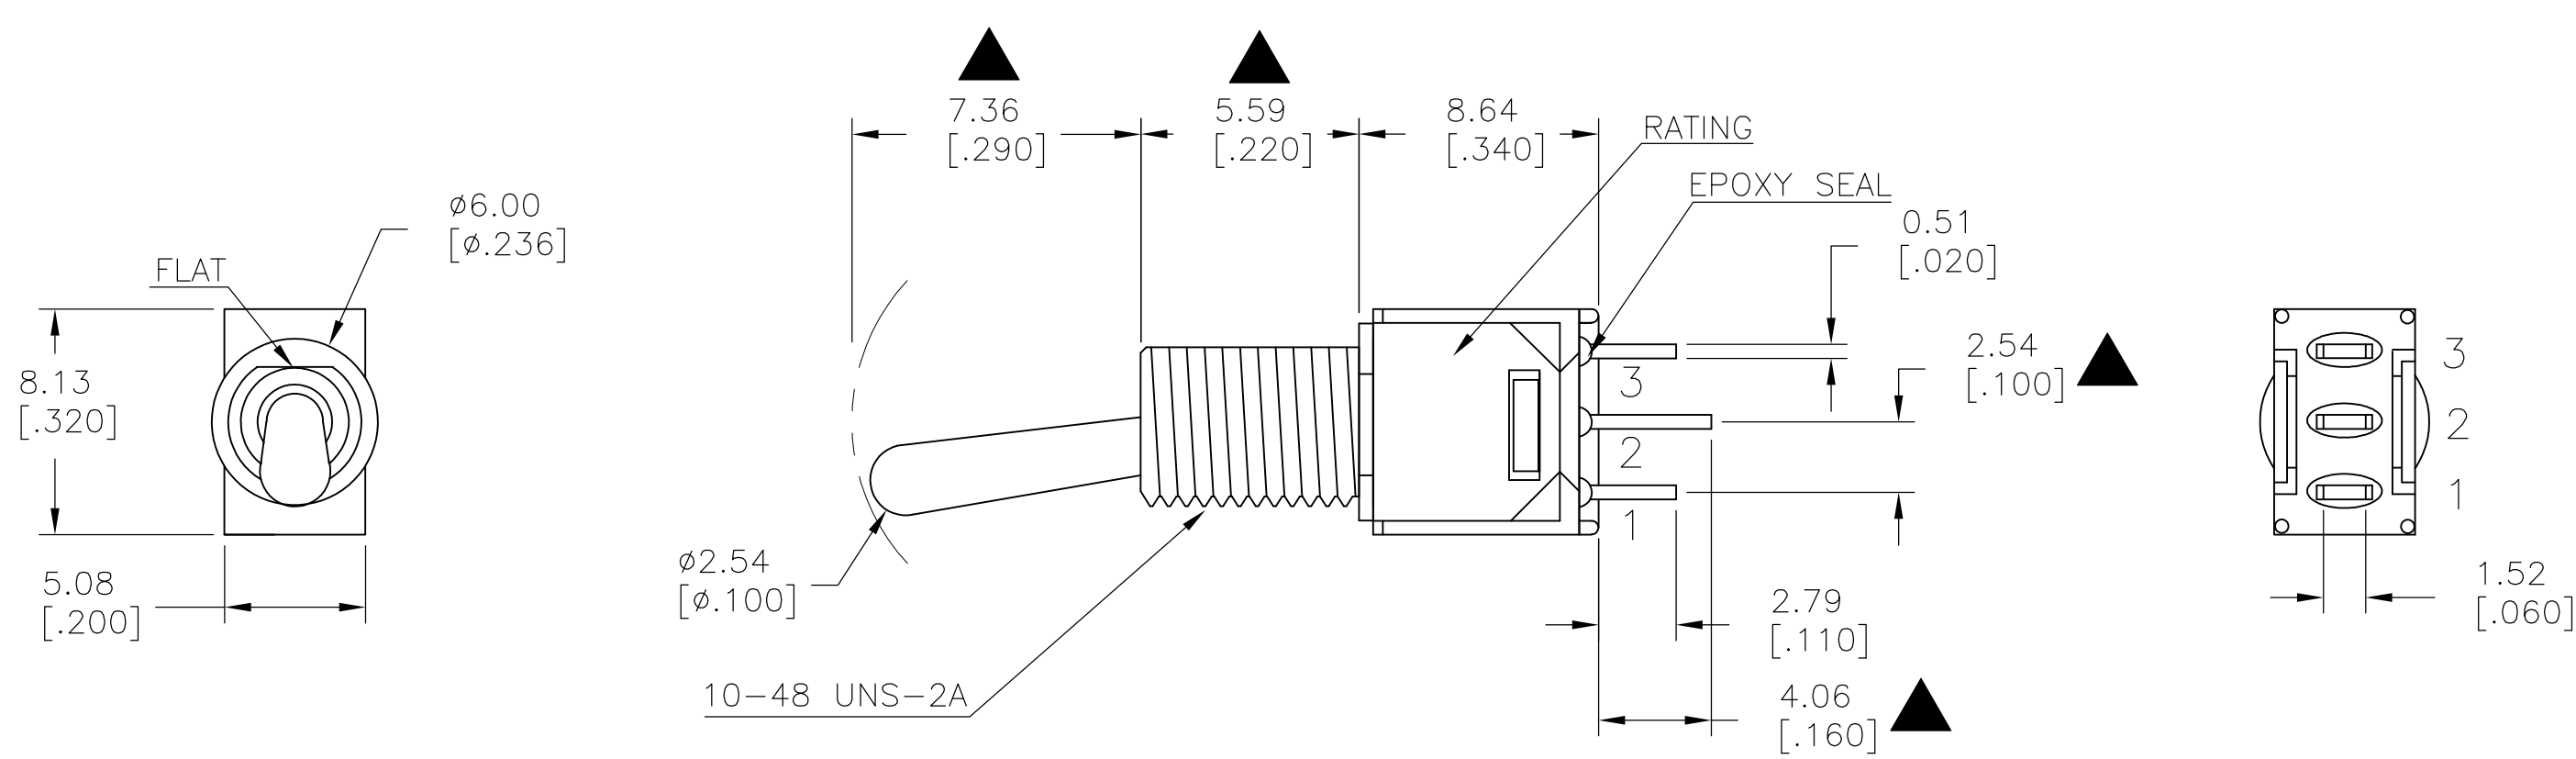

PANEL MOUNTING

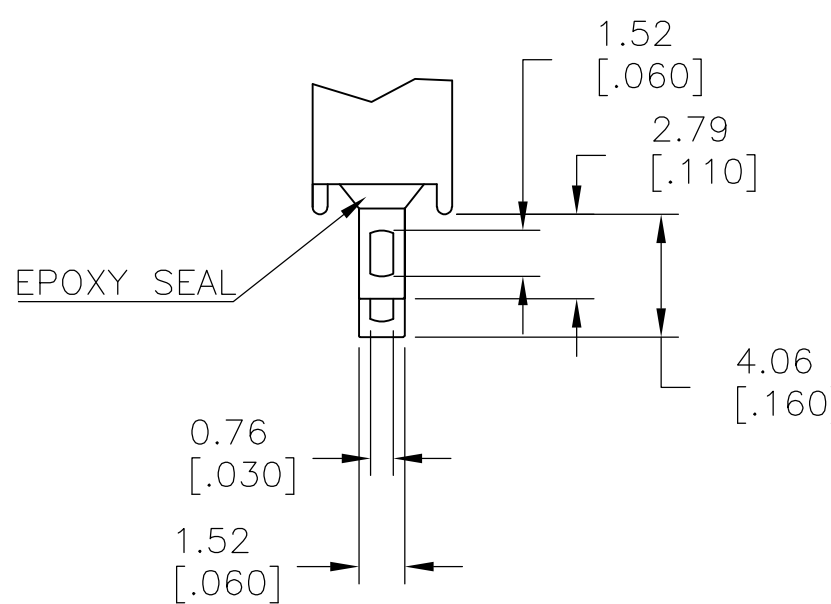

SOLDER LUG

LAYOUT FOR PN 2267079-3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
NAGALAKSHMI K
11JUL2014

CHK
HILL, RYAN
11JUL2014

APVD
HILL, RYAN
11JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
mm [INCHES]

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.38[.015]
2 PLC ± 0.25[.010]
3 PLC ± -
4 PLC ± -
ANGLES ± 5°
FINISH

-

TE Connectivity

NAME

SUBMINIATURE TOGGLE SWITCH

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2267079

RESTRICTED TO


SCALE
3:1

SHEET
3 of 6

REV
A

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	OFF	ON
TERM. COMM.	2-3		2-1
SCHEMATIC		OPEN	

SWITCH FUNCTION

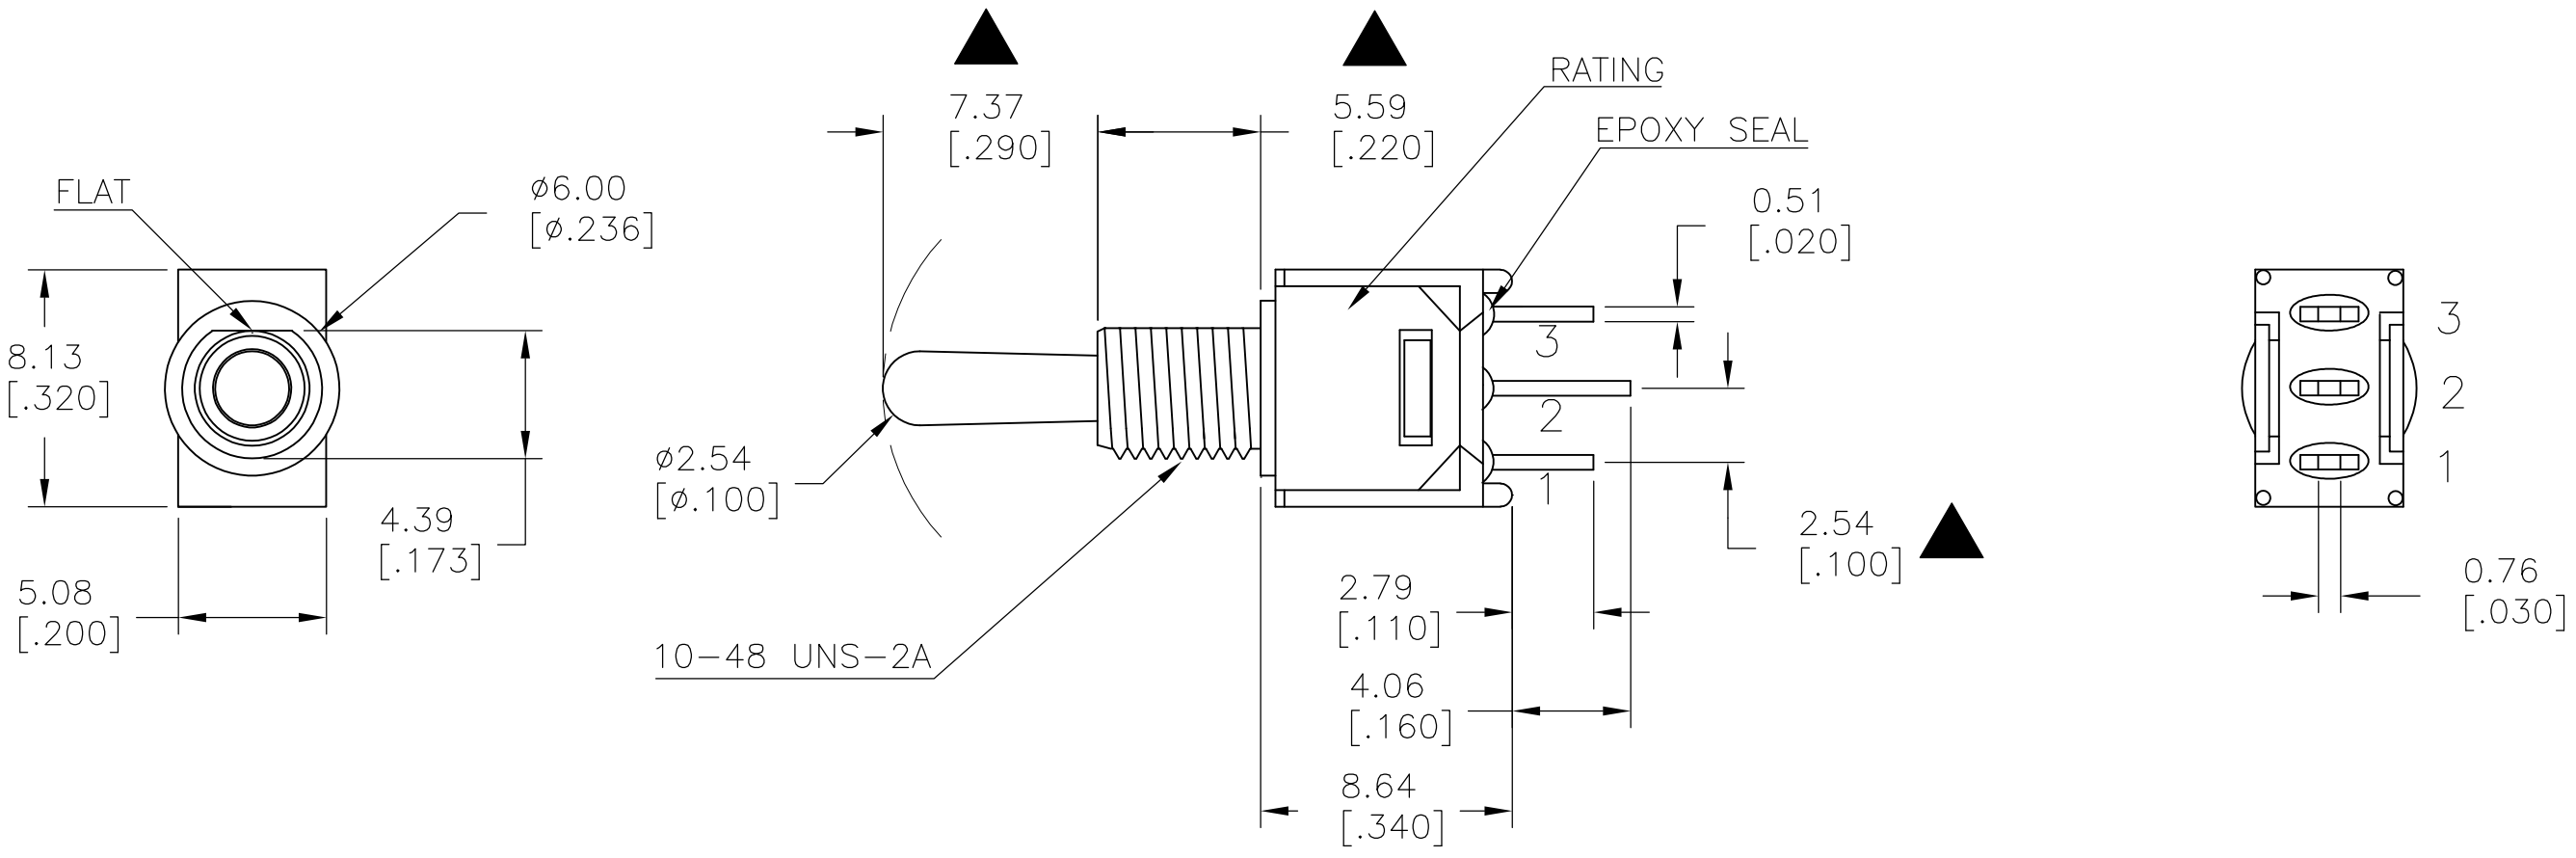

PANEL MOUNTING

SOLDER LUG

LAYOUT FOR PN 2267079-4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± 0.38[.015]
2 PLC ± 0.25[.010]
3 PLC ± —
4 PLC ± —
ANGLES ± 5°
FINISH
—

DWN
NAGALAKSHMI K
11JUL2014

CHK
HILL, RYAN
11JUL2014

APVD
HILL, RYAN
11JUL2014

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

NAME
SUBMINIATURE TOGGLE SWITCH

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2267079

RESTRICTED TO
—

SCALE
3:1


SHEET
4 OF 6

REV
A

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
—	—	—	—	SEE SHEET 1	—	—

MODEL NO.	POS.1	POS.2	POS.3
TMD	OFF	NONE	ON
TERM. COMM.	OPEN	N/A	3-1
SCHEMATIC			

SWITCH FUNCTION

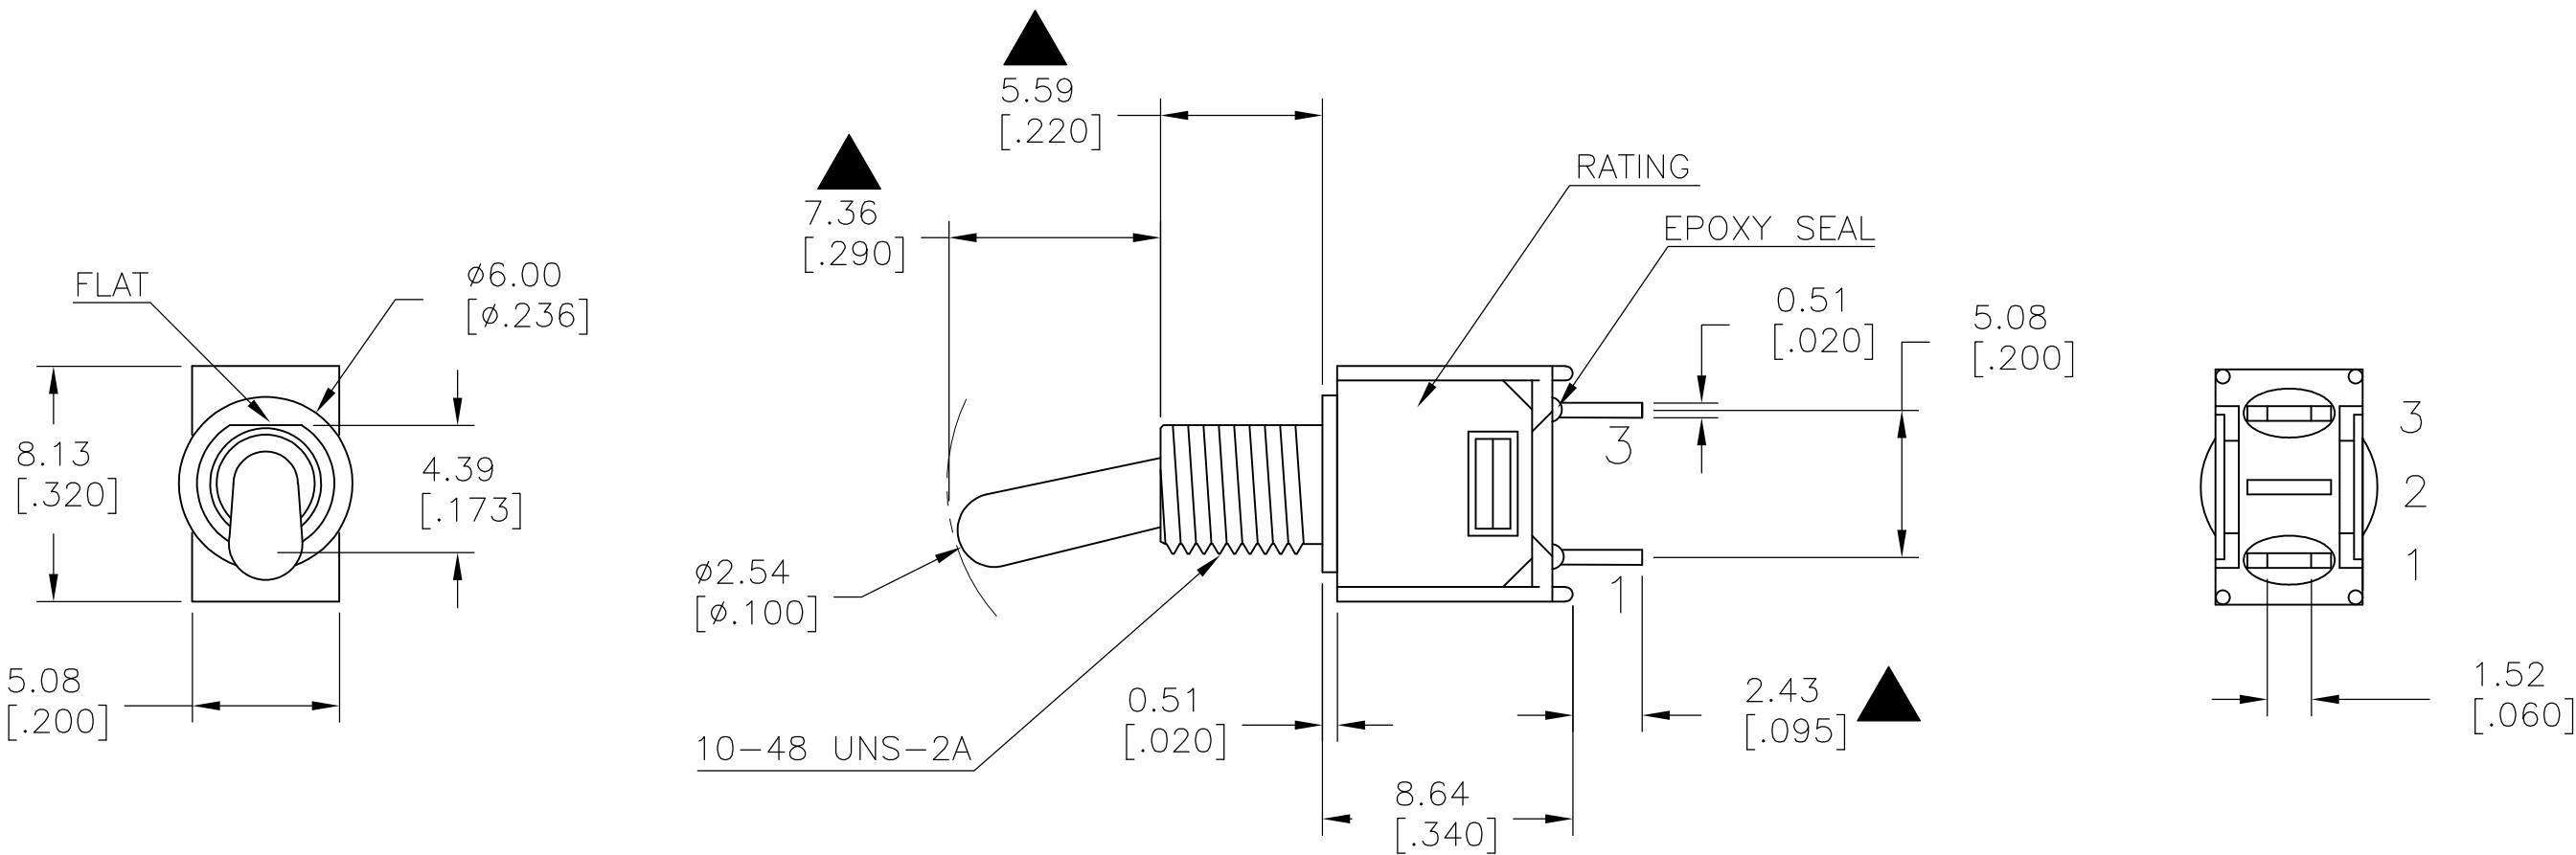


WITHOUT LOCKING RING

WITH STANDARD LOCKING RING

PANEL MOUNTING



LAYOUT FOR PN 2267079-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014		 TE Connectivity													
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014															
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HILL, RYAN 11JUL2014		NAME SUBMINIATURE TOGGLE SWITCH												
			PRODUCT SPEC —														
			APPLICATION SPEC —		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO						
	MATERIAL —		FINISH —		WEIGHT —		A2		00779		C=2267079		—				
CUSTOMER DRAWING						SCALE		3:1		SHEET		5 of 6		REV		A	


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3	N/A	2-1
SCHEMATIC			

SWITCH FUNCTION

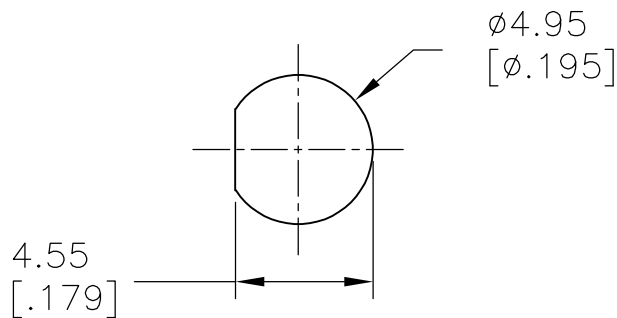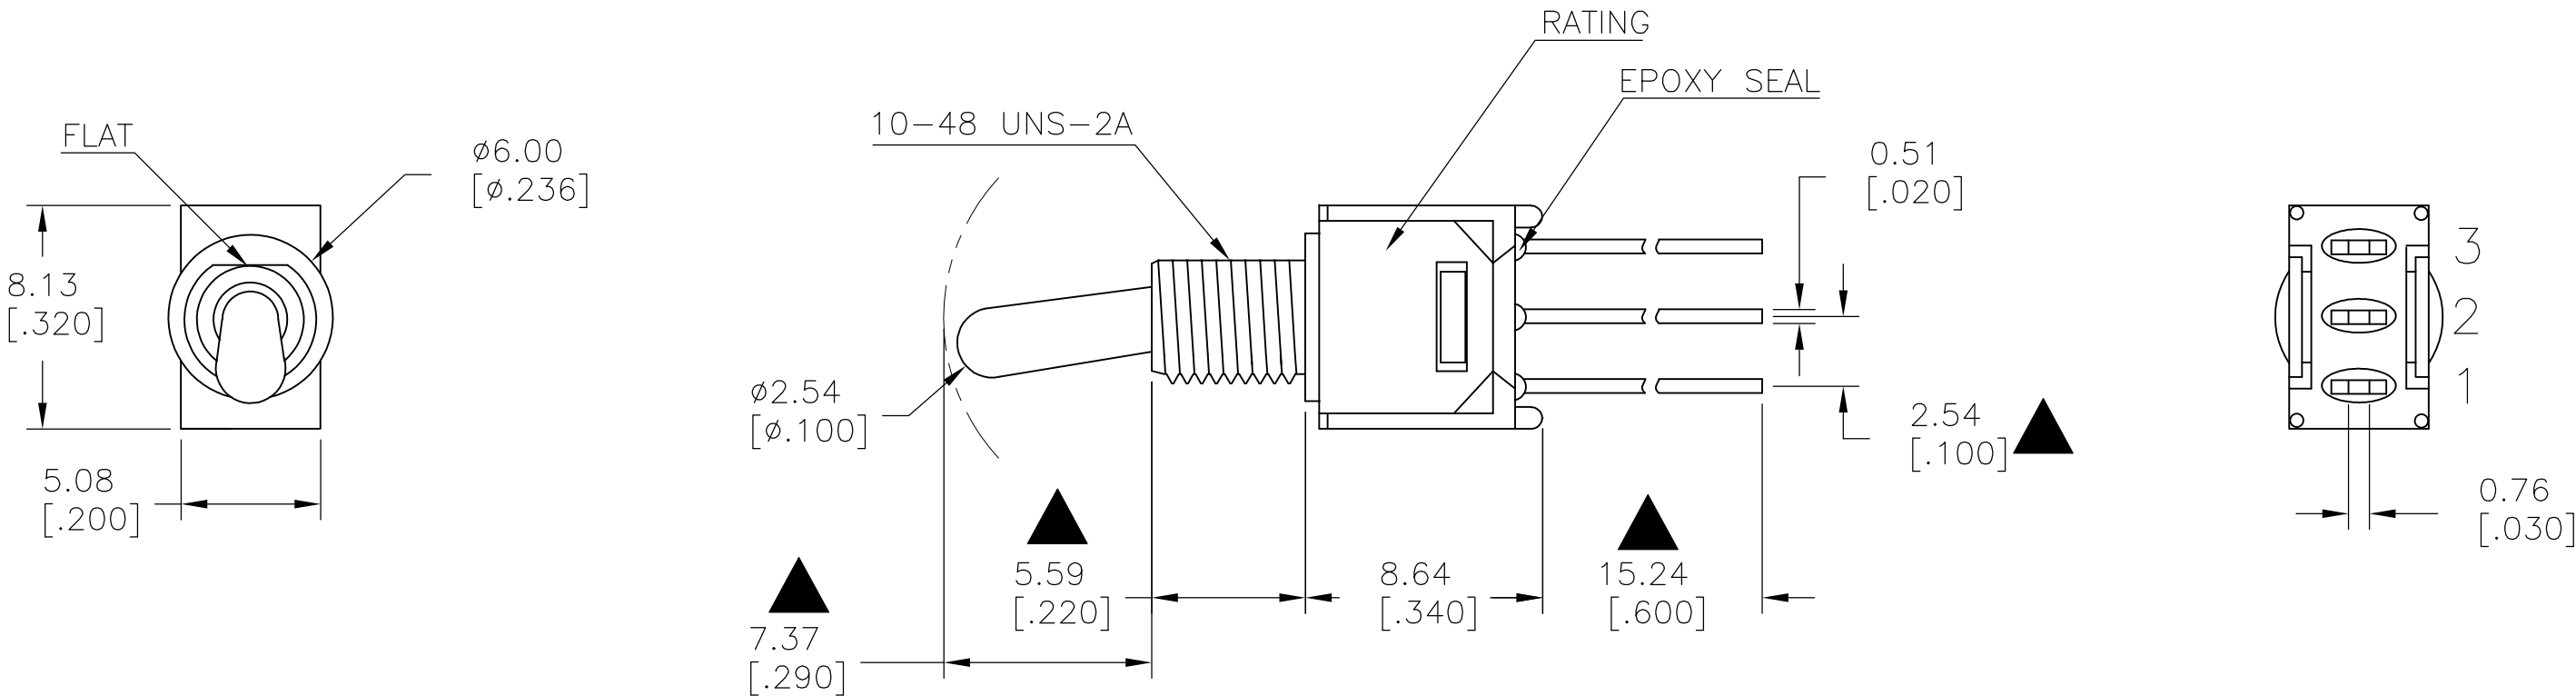

PANEL MOUNTING

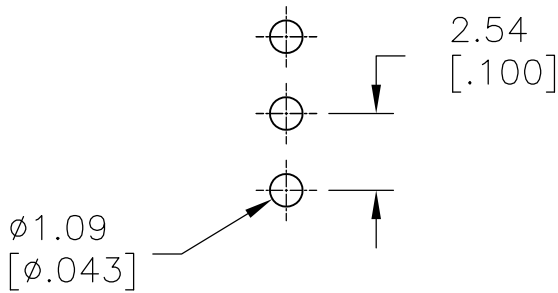

SOLDER LUG

LAYOUT FOR PN 2267079-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
		APVD HILL, RYAN 11JUL2014	NAME			
		PRODUCT SPEC	SUBMINIATURE TOGGLE SWITCH			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE			
0 PLC ± -		—	CAGE CODE			
1 PLC ± 0.38[.015]		—	DRAWING NO			
2 PLC ± 0.25[.010]		—	RESTRICTED TO			
3 PLC ± -		—	A2 00779 C=2267079			
4 PLC ± -		—	SCALE			
ANGLES ± 5°		—	3:1			
FINISH		WEIGHT	SHEET			
—		—	6 OF 6			
—		CUSTOMER DRAWING	REV			
—		—	A			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru