

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
A3		REV PER ECR-12-013085			24JULY2012	LW	AC	
B		REV PER ECR-13-017562			14NOV2013	HS	FY	

NOTES:
1. MATERIALS:
HOUSING:HIGH TEMP. THERMOPLASTIC GLASS/MINERAL FILLED UL94V-0
TERMINAL:COPPER ALLOY
△ FINISH:
TIN OPTION- GOLD AT CONTACT AREA AND
NICKEL UNDERPLATED OVER ALL
TIN AT TAIL AREA
TIN-LEAD OPTION- GOLD AT CONTACT AREA AND
NICKEL UNDERPLATED OVER ALL
TIN-LEAD AT TAIL AREA

△ 3 PCB HOLE SIZE:
-DRILLED HOLE SIZE 0.838MM REF
-COPPER UNDERPLATE 0.03 TO 0.07MM
-TIN/TIN-LEAD SURFACE PLATED FINISHED HOLE SIZE 0.725±0.075MM
OR ORGANIC SURFACE PROTECTANT (OSP) PLATED FINISHED HOLE
SIZE 0.75±0.05MM


4.CONNECTOR WERE PACKED BY TRAY
5.REFER TO TE'S PRODUCT SPECIFICATION:108-2473
FOR TORQUE FORCE AND RETENTION FORCE

6.MATED WITH 2169806-*



△ 7 PART NUMBER AND DATE CODE AT ASSEMBLY AREA AS APPROXIMATE SHOWN.
ALSO CAN BE OPPOSITE SIDE

△ 8 THERE ARE TWO TYPES OPTION ONE TYPE WITH DOVETAIL
ANOTHER WITHOUT DOVETAIL

△ 9 COMPONENT PLACEMENT ZONE

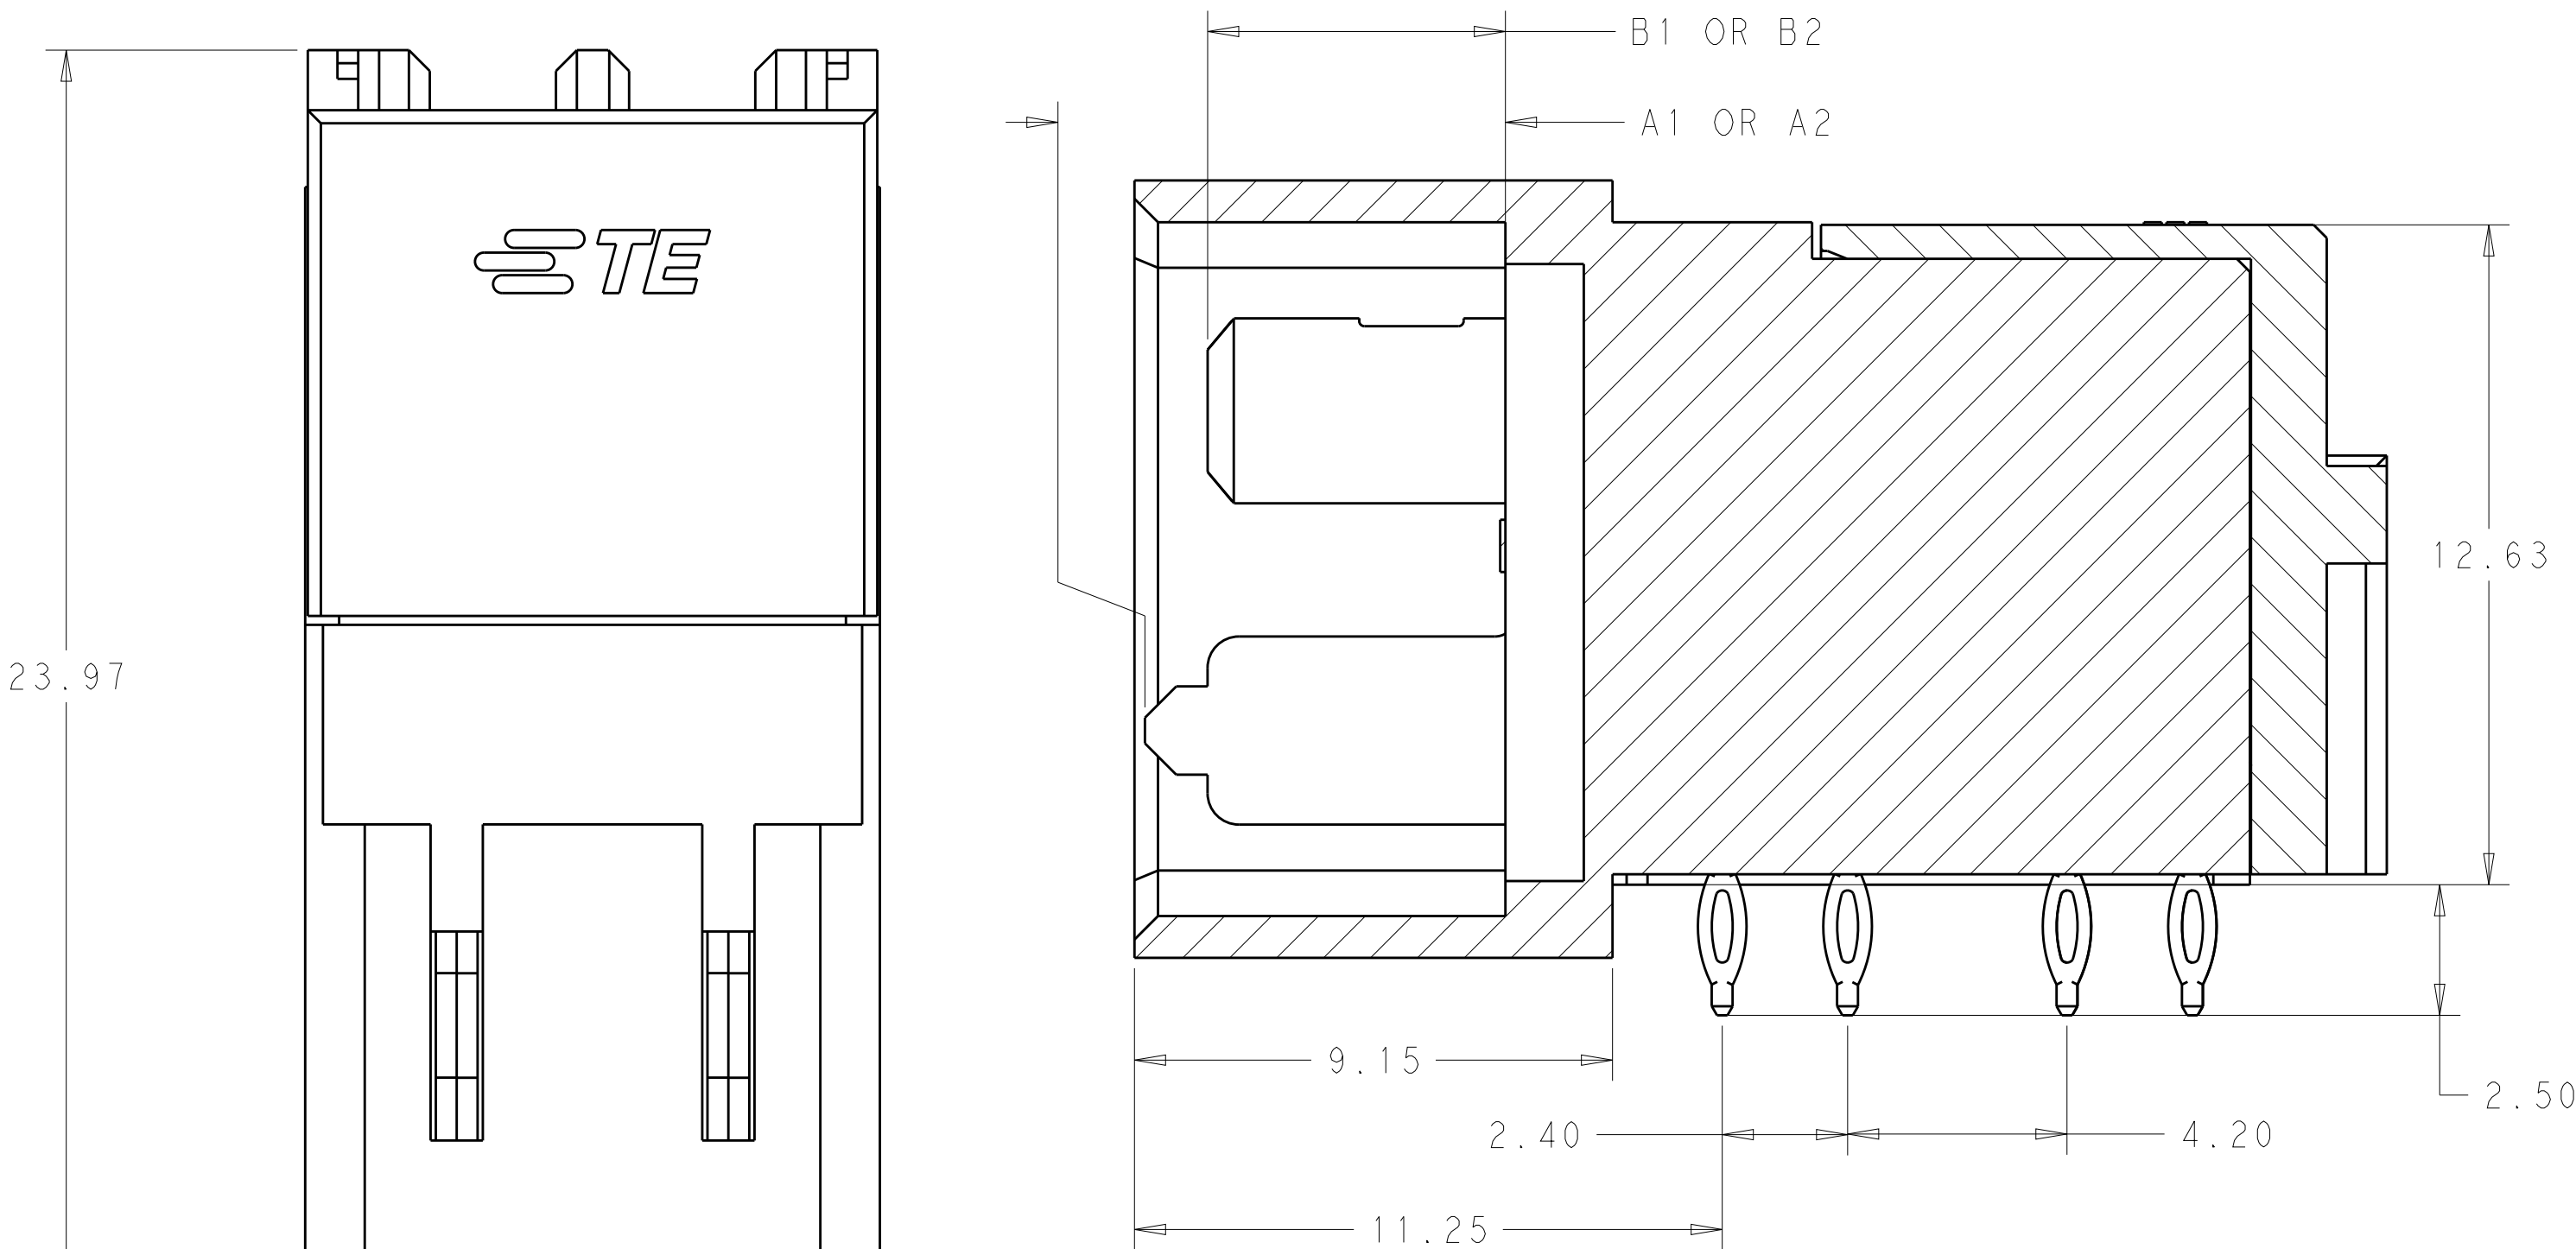


SECTION Z-Z

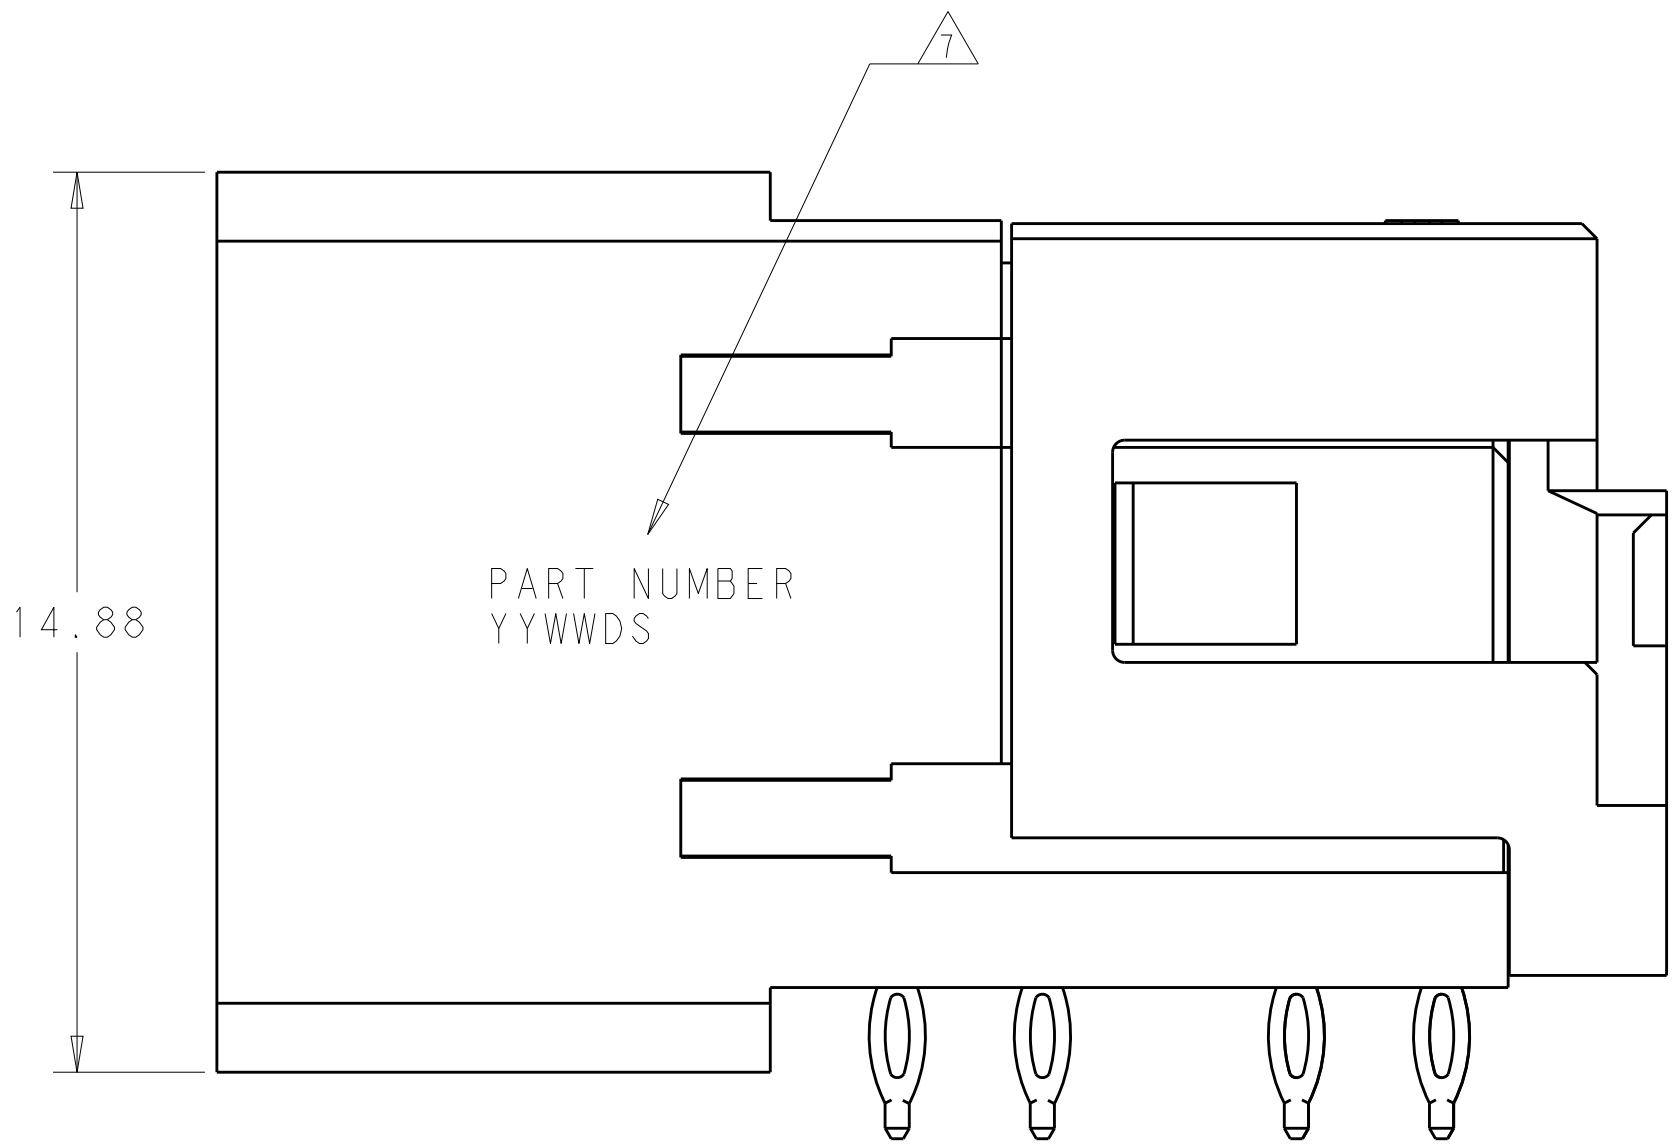
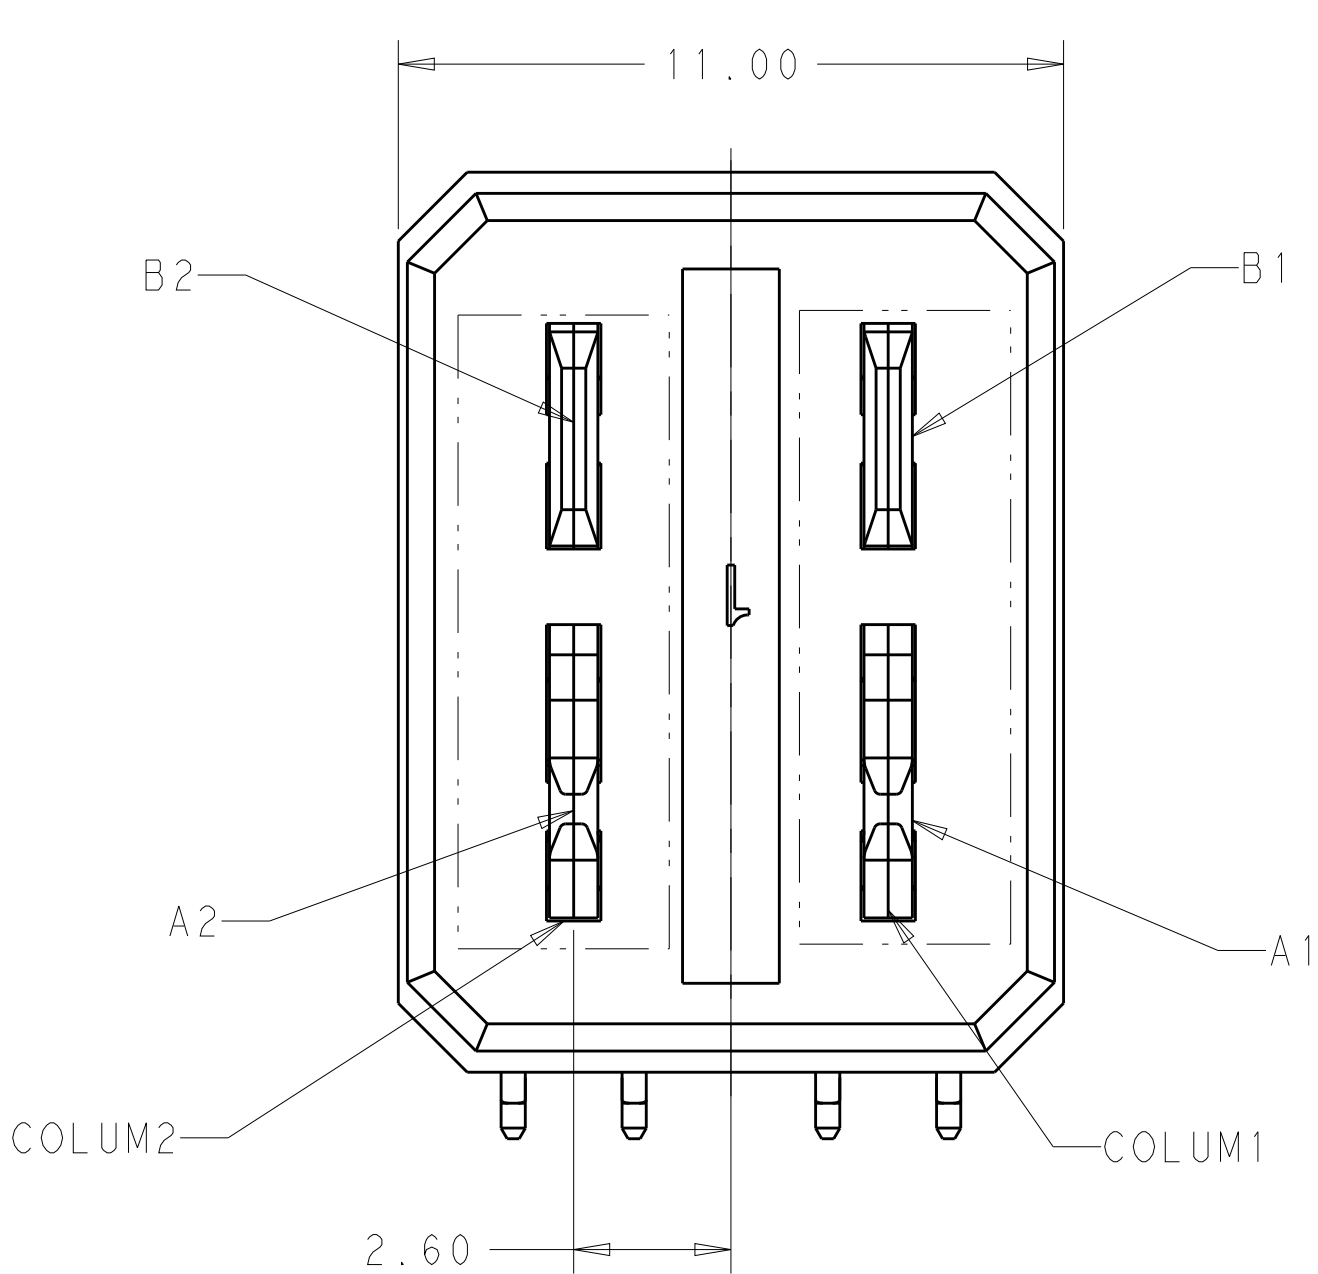


OBSOLETE	TRAY	TIN PLATING	NO DOVE TAIL	6.9	6.9	6.9	6.9	2169797-1
				5.7	5.7	5.7	5.7	2169797-2
				6.9	6.9	5.7	5.7	2169797-3
				5.7	5.7	6.9	6.9	2169797-4
				5.7	6.9	5.7	5.7	2169797-5
			WITH DOVE TAIL	6.9	6.9	6.9	6.9	2169797-6
				5.7	5.7	5.7	5.7	2169797-7
				6.9	6.9	5.7	5.7	2169797-8
				5.7	5.7	6.9	6.9	2169797-9
				6.9	6.9	6.9	6.9	5-2169797-1
				5.7	5.7	5.7	5.7	5-2169797-2
			NO DOVE TAIL	6.9	6.9	5.7	5.7	5-2169797-3
				5.7	5.7	6.9	6.9	5-2169797-4
		TIN-LEAD PLATING		5.7	6.9	5.7	5.7	5-2169797-5
				6.9	6.9	6.9	6.9	5-2169797-6
				5.7	5.7	5.7	5.7	5-2169797-7
		WITH DOVE TAIL	6.9	6.9	5.7	5.7	5-2169797-8	
			5.7	5.7	6.9	6.9	5-2169797-9	
	PACKAGING	PLATING OPTION	TYP  8	B1	B2	A2	A1	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: LERRY.WANG 05MAY2011	TE Connectivity	
		CHK: SUNY_ZHAO 05MAY2011		
DIMENSIONS:		APVD: SUNY_ZHAO 05MAY2011	NAME	
mm		PRODUCT SPEC	ASSEMBLY	
		108-2473	IMPACT POWER 3PAIR R/A HEADER	
		APPLICATION SPEC	PRESS-FIT	
		114-32028	SIZE	
		FINISH	CAGE CODE	
		△ 2	DRAWING NO	
			RESTRICTED TO	
			A100779C=2169797	
			CUSTOMER DRAWING	
			SCALE 8:1	
			SHEET 1 OF 2	
			REV B	

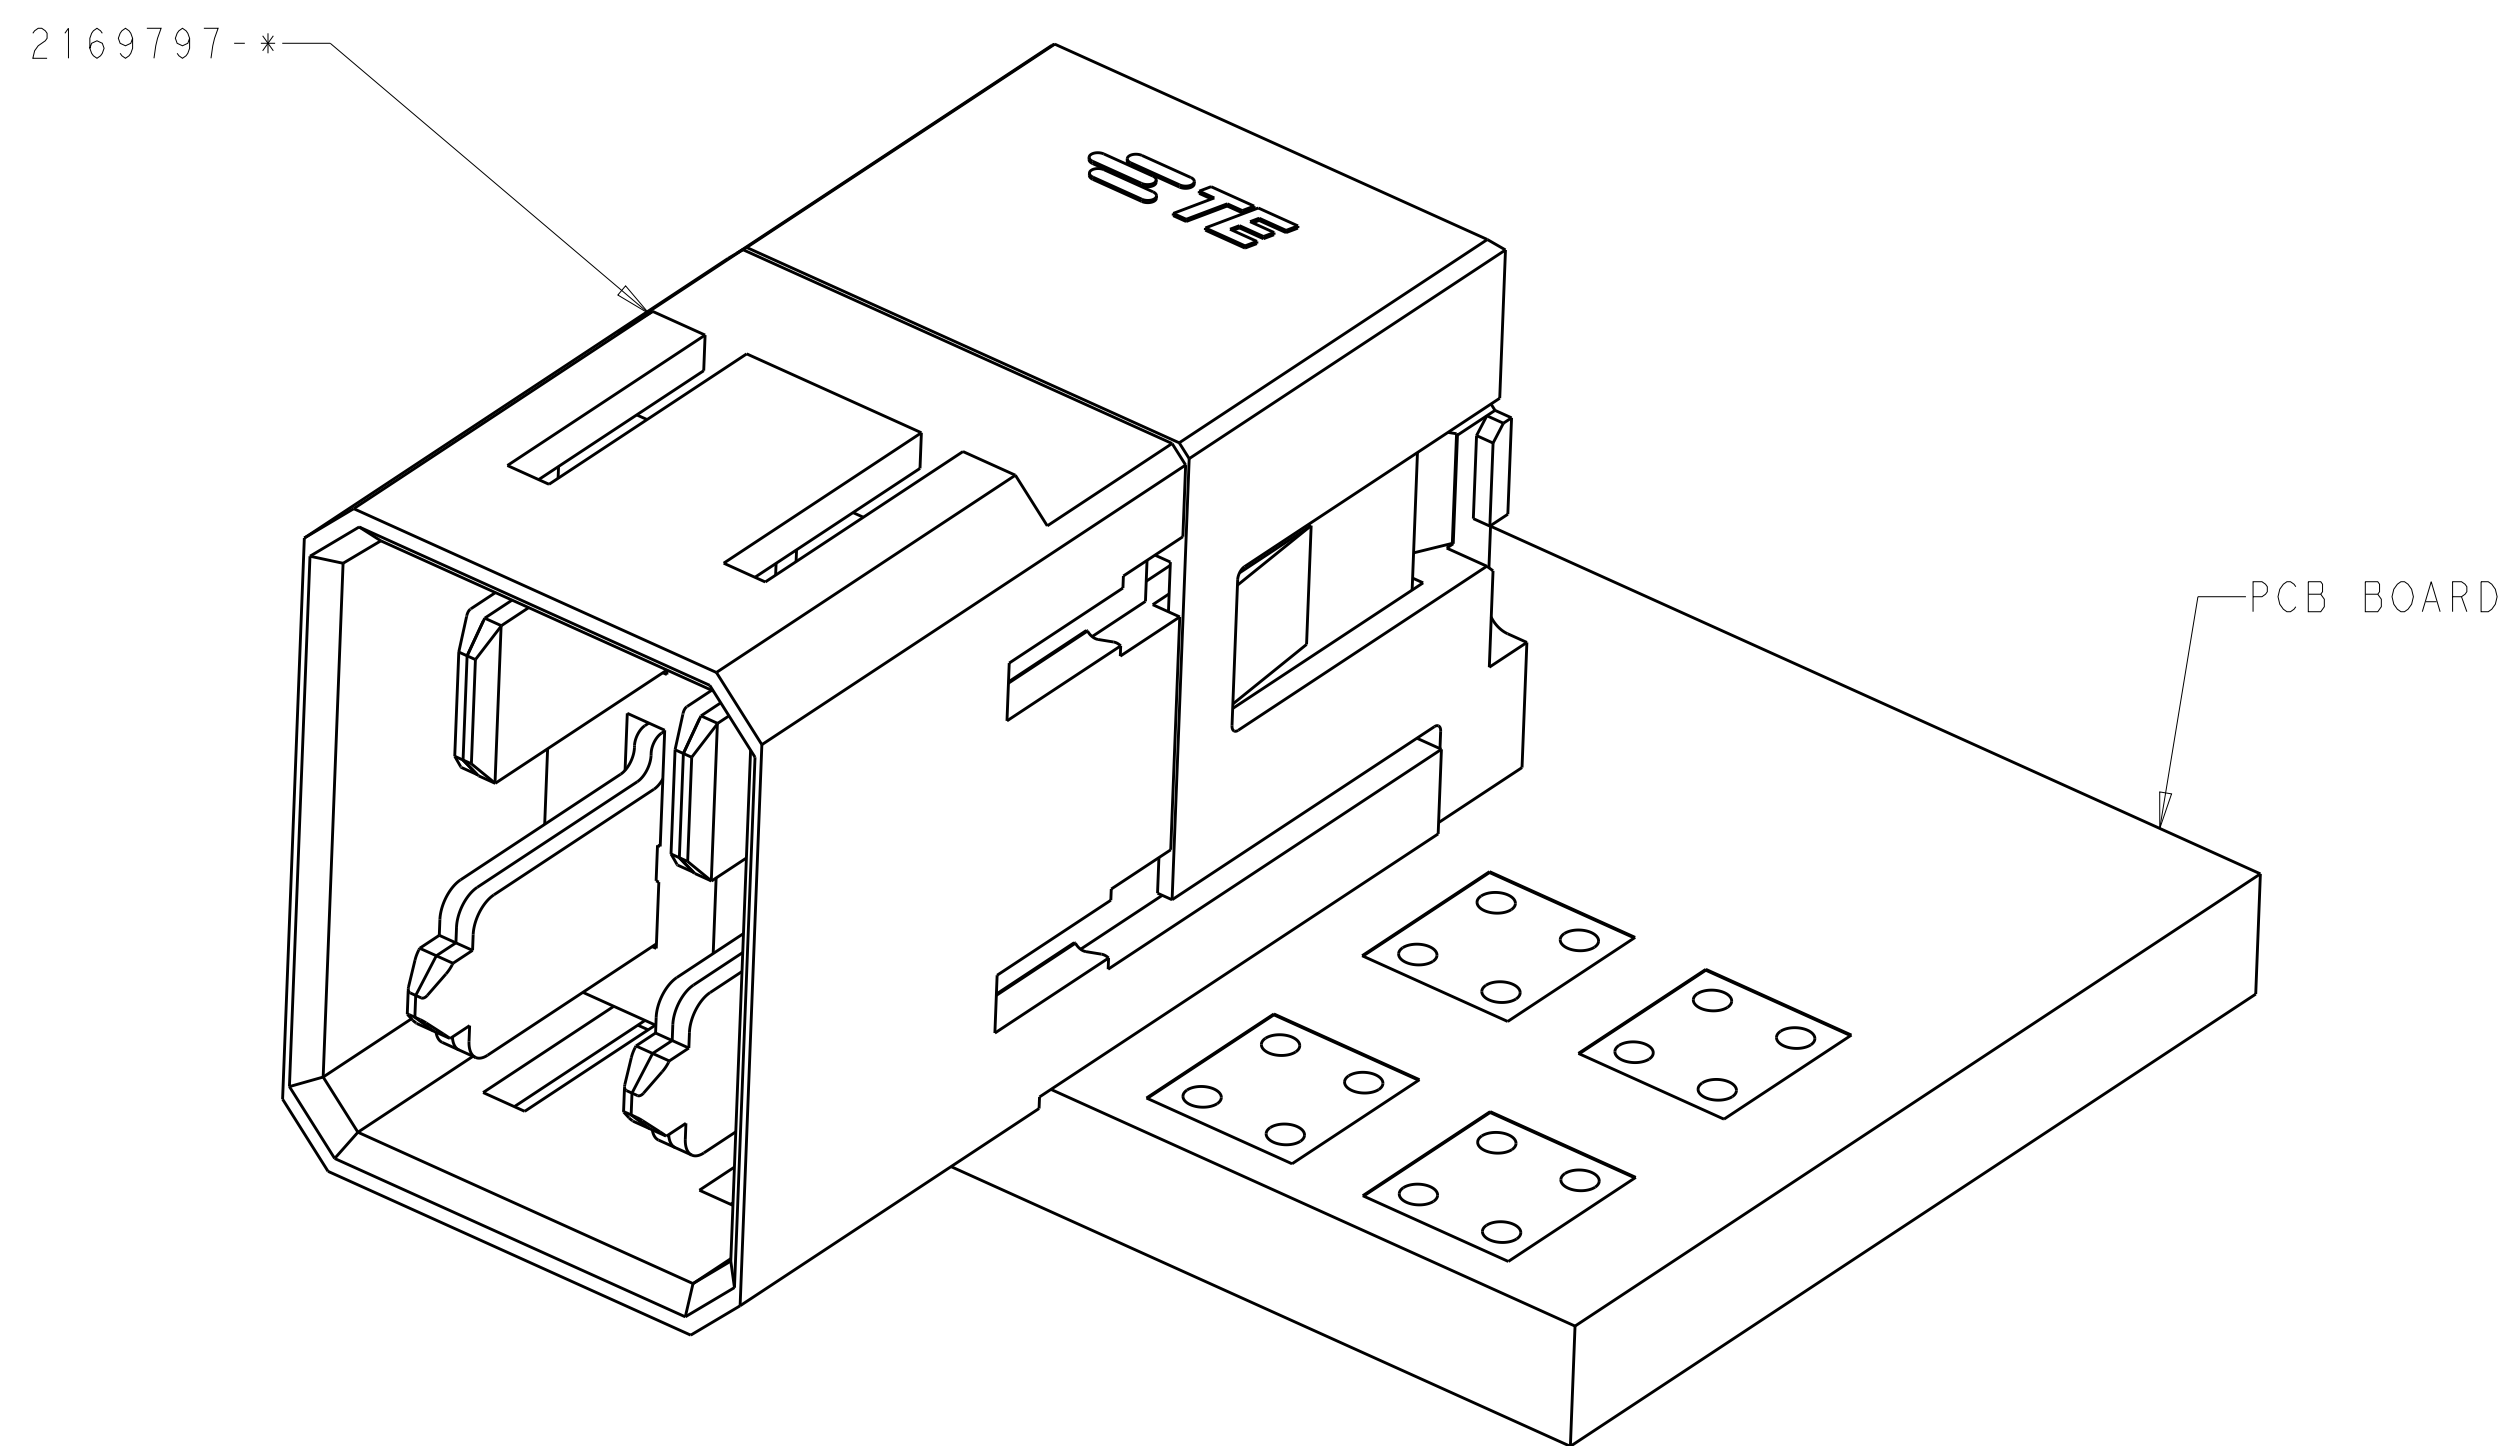


CONNECTOR MATED WITH PCB

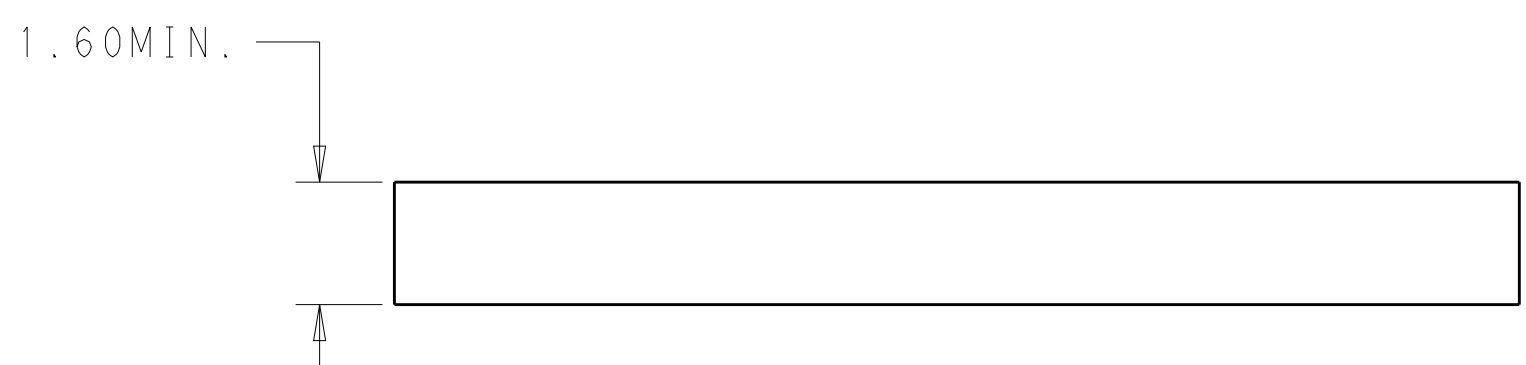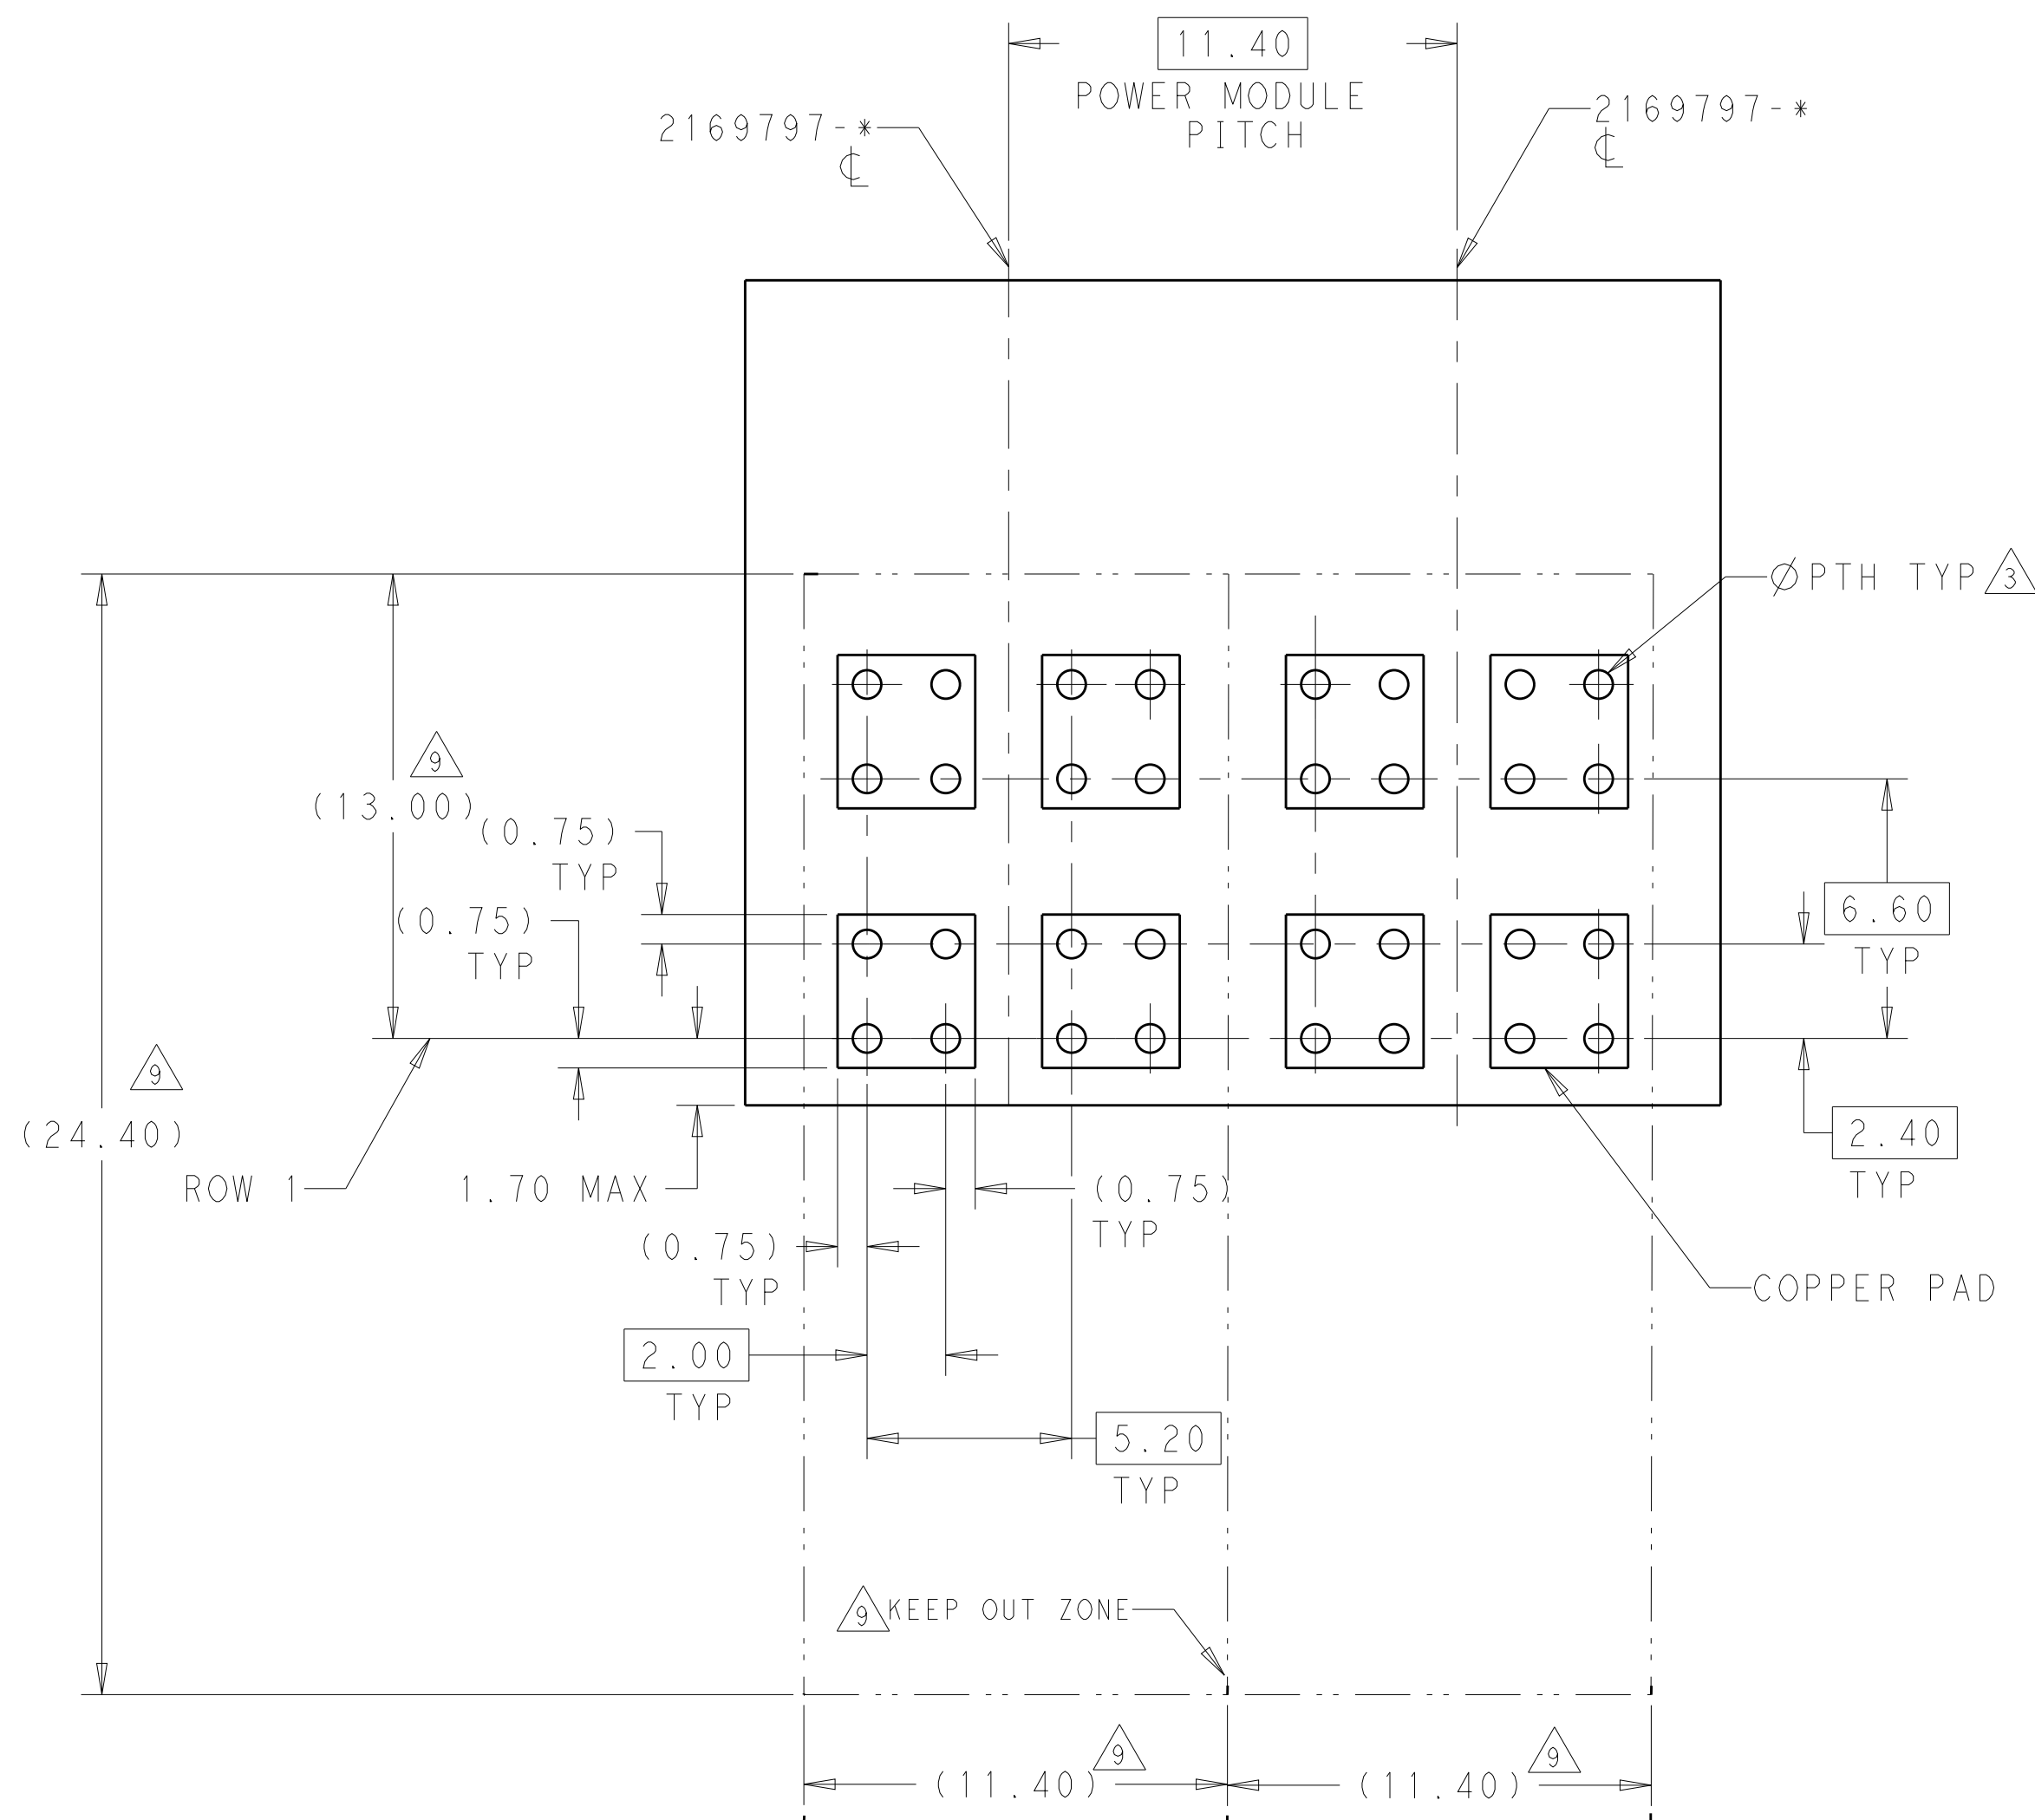

PCB LAYOUT FOR 3PAIR R/A HEADER POWER MODULE
(COMPONENT SIDE SHOWN)

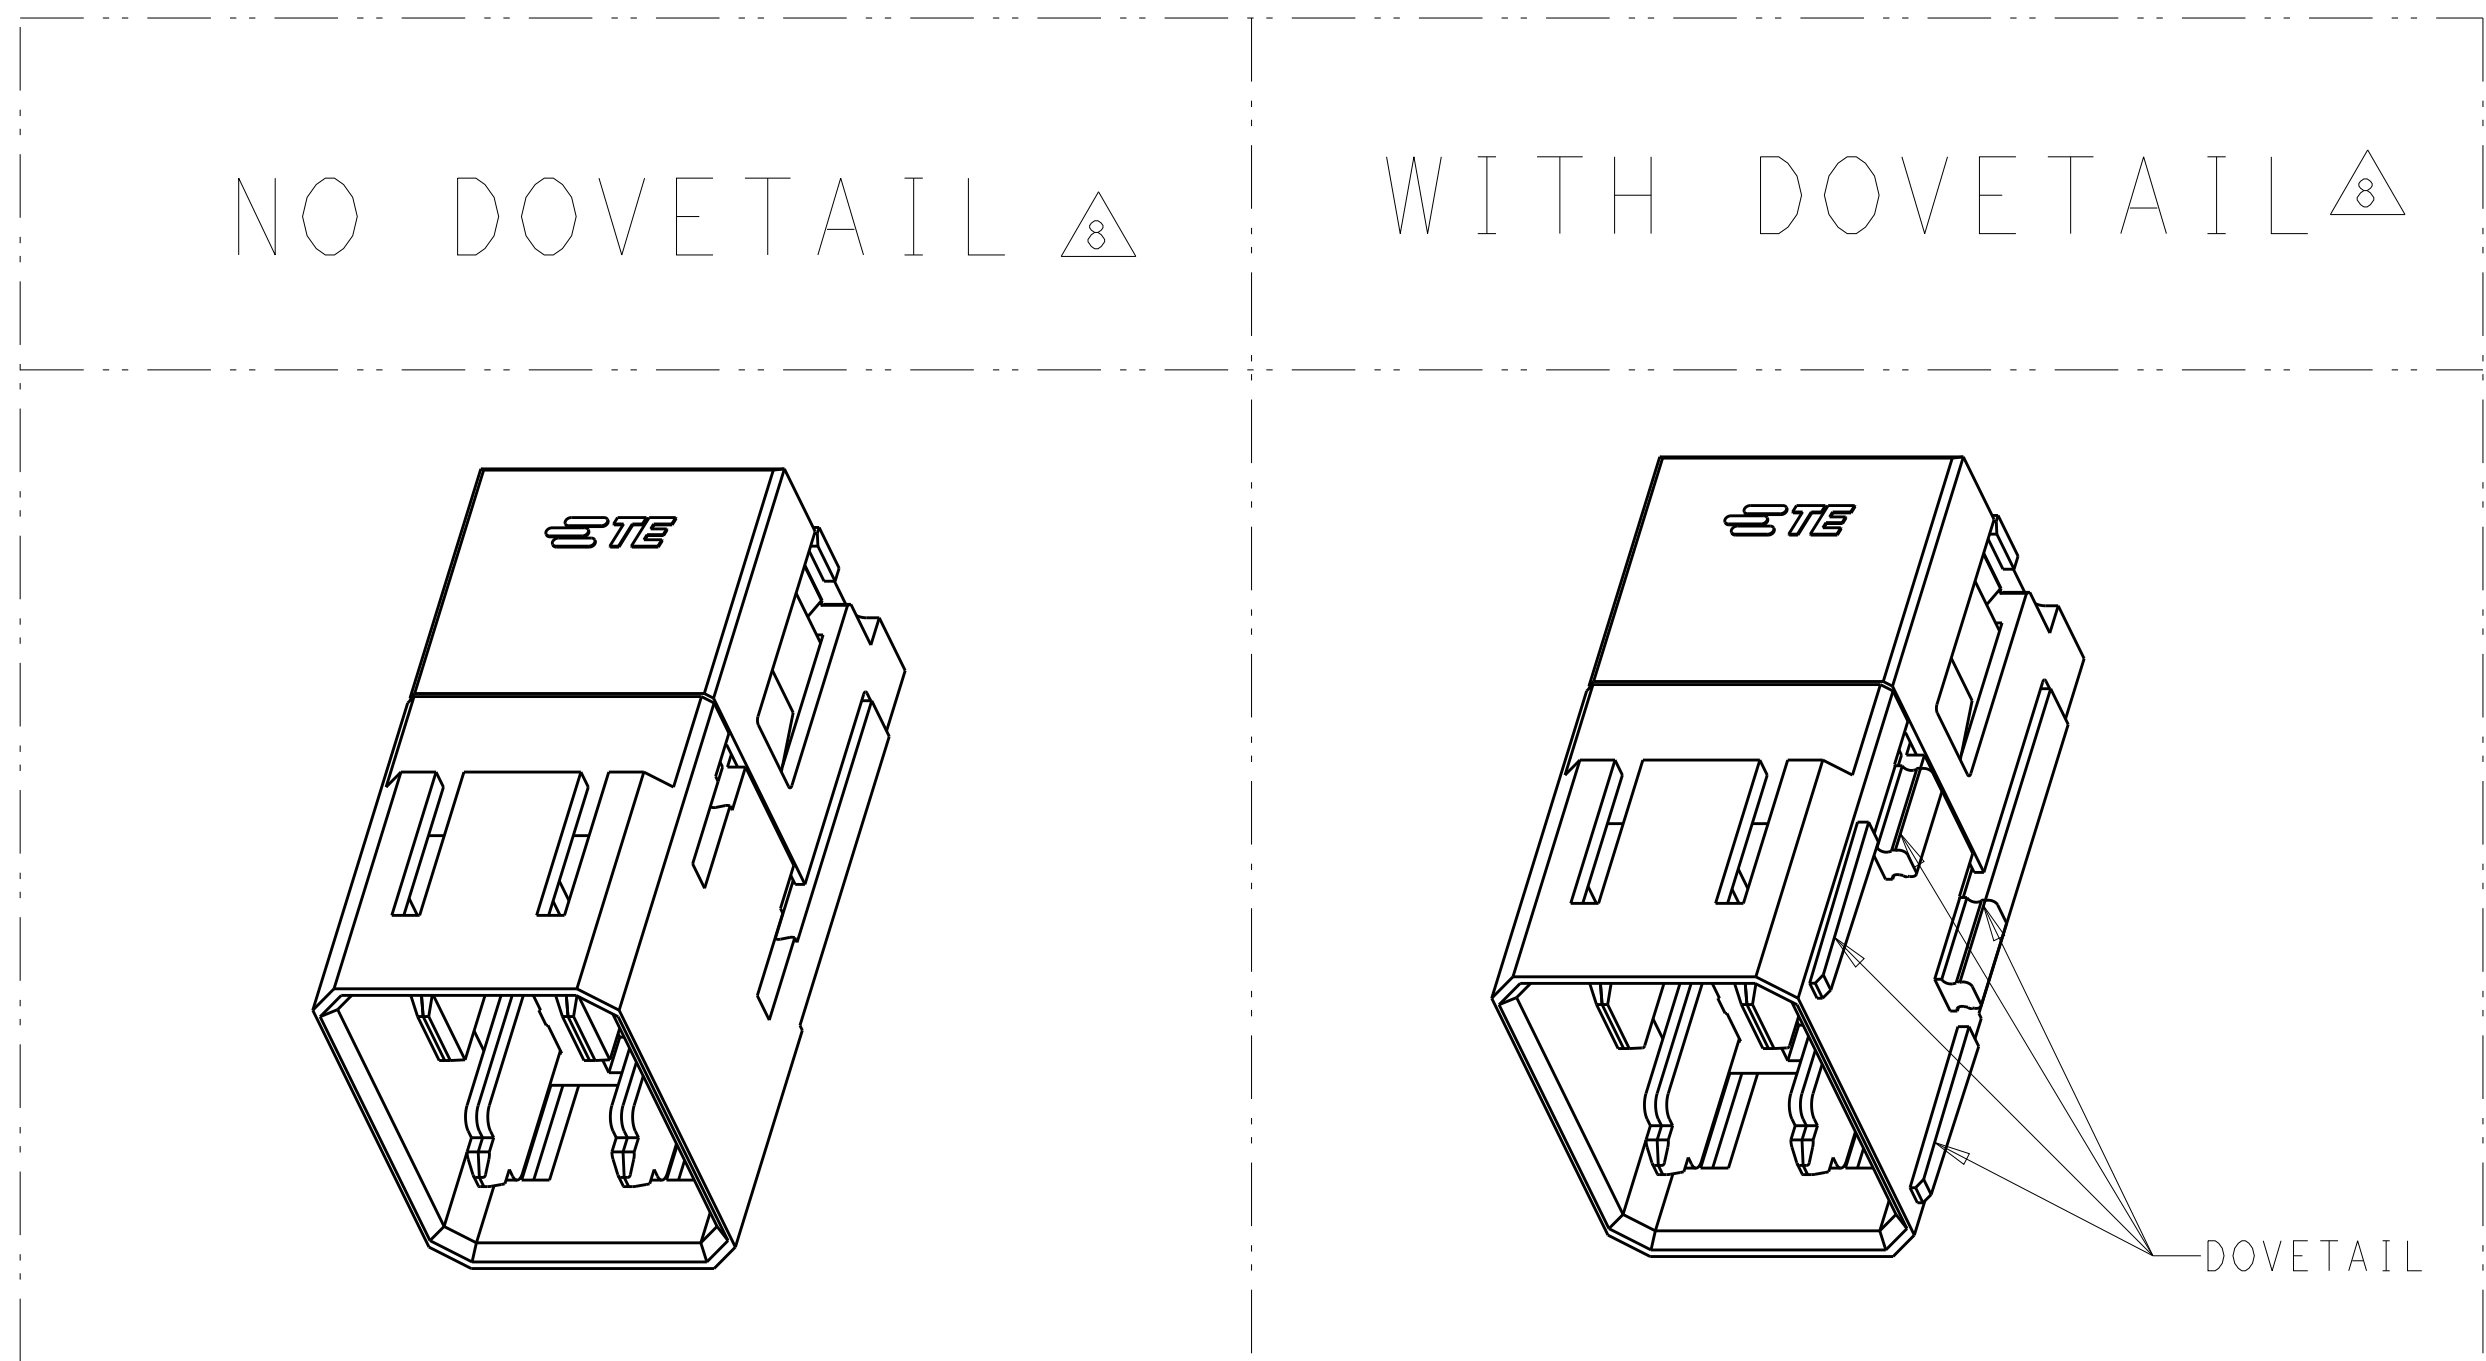

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LERRY WANG 05MAY2011		 TE Connectivity	
DIMENSIONS:		CWN SUNY ZHAO 05MAY2011			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SUNY ZHAO 05MAY2011		NAME	
mm	 0 PLC ±.° 1 PLC ±.° 2 PLC ±0.25 3 PLC ±.° 4 PLC ±.° ANGLES FINISH #3	PRODUCT SPEC 108-2473 APPLICATION SPEC 114-32028		ASSEMBLY IMPACT POWER 3PAIR R/A HEADER PRESS-FIT	
MATERIAL		WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 00779 ©=2169797 -	
CUSTOMER DRAWING		SCALE 8:1		SHEET 2 OF 2 REV B	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru