

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD

REPLACED BY OCEAN STYLE APPLICATOR PART NUMBER


FOR REPLACEMENT PARTS FOR APPLICATOR REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED) WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
DIMENSIONS:		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
 <ul style="list-style-type: none"> 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 		PRODUCT SPEC	RESTRICTED TO		
		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL	FINISH	WEIGHT	A3	C-	
		SCALE	SHEET	OF	REV

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1528064-1	D	-	LEADMAKER	MECH POST FEED	CUTS CARRIER
1528064-2	D	-	BENCH	MECH PRE FEED	CUTS CARRIER
1528064-6	D	-	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1528064-1	D	-	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1528064-2	D	-	BENCH	MECH PRE FEED	-2 AND SPARE PARTS
7-1528064-6	D	-	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1528064-7	A	-	-	-	SPARE PARTS KIT

CRIMP DATA			AMP TERMINAL	AMP CRIMP SPECS
TERMINAL NAME: MOS RECEPTACLE.				
CRIMP	SIZE	TYPE	RANGE	
WIRE	1.40 [0.055 IN]	F	0.22mm ² - 0.50mm ²	
INSUL	2.03 [0.080 IN]	0	1.15-1.90 [0.045-.075 IN]	
WIRE STRIP LENGTH		APPL INSTRUCTION		
2.95-3.45 [1.116-.136 IN]		408-8322 & 408-8490		
TERMINAL APPL SPEC		FEED		
114-15077		7.00 [0.276 IN]		
TERMINALS APPLIED				
144969	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
WIRE SIZE	CRIMP HEIGHT	REF SETTING		
mm ² AWG				
0.60mm ²	0.92 ±0.05 [0.036 ±.002 IN]	B4		
0.50mm ²	0.84 ±0.05 [0.033 ±.002 IN]	C1		
0.35mm ²	0.77 ±0.05 [0.030 ±.002 IN]	C5		
0.22mm ²	0.69 ±0.05 [0.027 ±.002 IN]	D1		

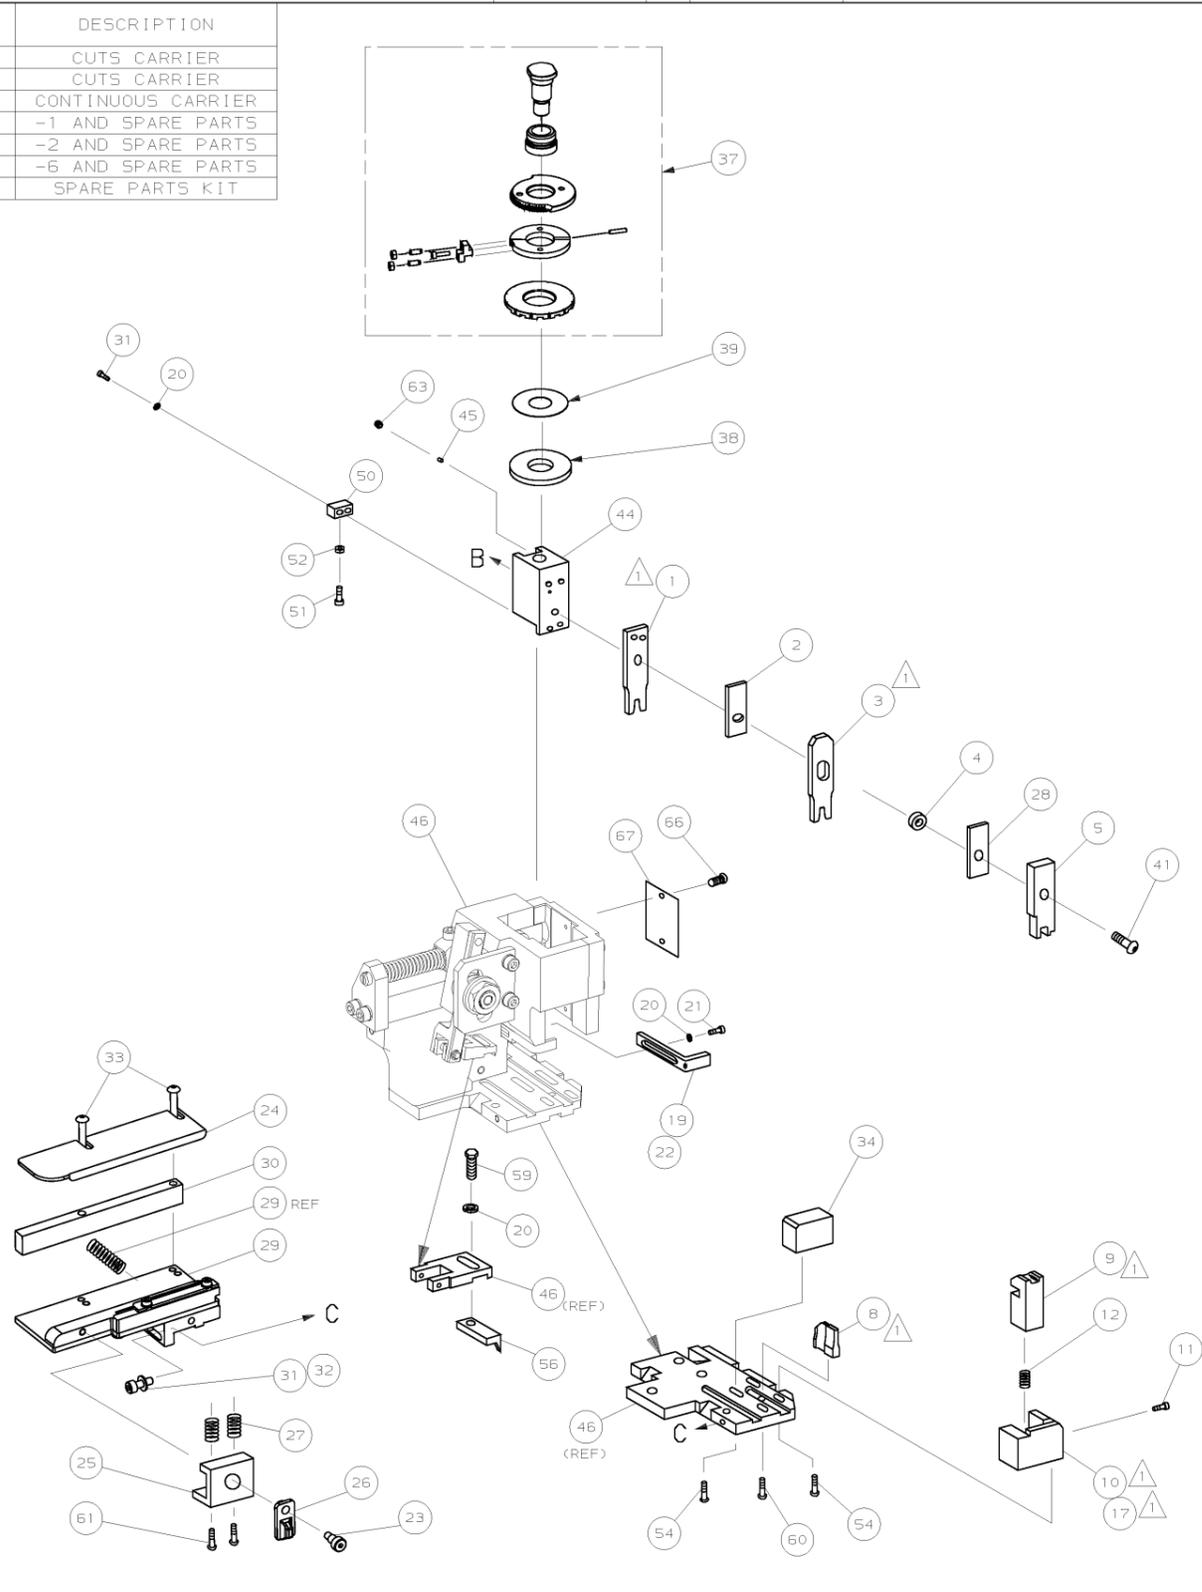

- 1. RECOMMENDED SPARE PARTS.
- 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

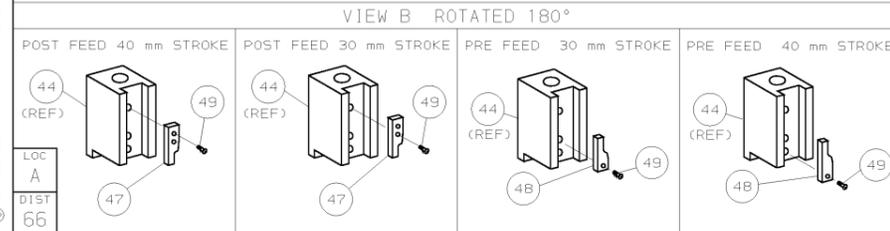

*** WARNING:**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN REQ'D CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

QTY	RECD	PER	ASSY	PART NO	DESCRIPTION	ITEM NO			
-	1	1	1	1	1	1	1528064	PRINT, APPLICATOR LOG SHEET	73
-	1	1	1	1	1	1	1338705-3	DOCUMENTATION PACKAGE	72
-	-	-	-	-	-	-	-	-	71
-	-	-	-	-	-	-	-	-	70
-	-	-	-	-	-	-	-	-	69
-	-	-	-	-	-	-	-	-	68
-	1	1	1	1	1	1	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	2	2	2	21017-2	SCR,DRIVE(#2x.19) ID PLATE	66
-	-	-	-	-	-	-	-	-	65
-	1	1	1	1	1	1	3-18031-0	SCR,SKT SET (M6X6) RAM	64
-	-	-	-	-	-	-	-	-	63
-	2	2	2	2	2	2	1-18024-5	SCR,BHC (M5X25) DRAG	62
-	1	1	1	1	1	1	18024-7	SCR,BHC (M4X10) ANVIL	61
-	1	1	1	1	1	1	5-18022-2	SCR,HEX (M4X8) FEED FINGER	60
-	-	-	-	-	-	-	-	-	59
-	-	-	-	-	-	-	-	-	58
-	-	-	-	-	-	-	-	-	57
-	1	1	1	1	1	1	1338685-1	PAWL, FEED	56
-	-	-	-	-	-	-	-	-	55
-	4	4	4	4	4	4	18024-8	SCR,BHC (M4X12) SHEAR HOLDER	54
-	-	-	-	-	-	-	-	-	53
-	1	1	1	1	1	1	18030-1	NUT,HEX (M3) HOLD DOWN	52
-	1	1	1	1	1	1	811242-5	BUMPER, HOLDDOWN	51
-	1	1	1	1	1	1	690753-2	SPACER, TONKER	50
-	1	1	1	1	1	1	18024-3	SCR,BHC (M3X10) CAM	49
-	-	-	-	-	-	-	-	-	48
-	-	-	-	-	-	-	-	-	48
-	1	1	1	1	1	1	1338676-1	CAM, POST FEED 30 & 40 mm ST	47
-	1	1	1	1	1	1	1320999-3	APPLICATOR BASIC SUBASSY	46
-	1	1	1	1	1	1	690191-1	PLUG, NYLON	45
-	1	1	1	1	1	1	1338660-1	RAM	44
-	-	-	-	-	-	-	-	-	43
-	-	-	-	-	-	-	-	-	42
-	1	1	1	1	1	1	2-18024-6	SCR,BHC (M8X25) RAM	41
-	-	-	-	-	-	-	-	-	40
-	1	1	1	1	1	1	690125-1	SHIM SUBASSY	39
-	1	1	1	1	1	1	469367-8	SPACER, FINE ADJUST	38
-	1	1	1	1	1	1	879103-3	FINE ADJUST HEAD SUBASSY	37
-	-	-	-	-	-	-	-	-	36
-	-	-	-	-	-	-	-	-	35
-	1	1	1	1	1	1	1320934-5	SUPPORT, TERMINAL	34
-	2	2	2	2	2	2	1-18024-0	SCR,BHC (M4X20) STRIP GUIDE	33
-	1	1	1	1	1	1	18027-2	WASHER, FLAT (M4)	32
-	3	3	3	3	3	3	1-18023-2	SCR,SKT CAP (M4X12) MOUNT BLOCK	31
-	1	1	1	1	1	1	1320908-4	SPACER, STRIP GUIDE	30
-	1	1	1	1	1	1	1633073-1	STRIP GUIDE PLATE ASSY	29
-	1	1	1	1	1	1	1-455888-0	SPACER, FRONT SHEAR DEP	28
-	2	2	2	2	2	2	1-22284-0	SPRING, DRAG	27
-	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	26
-	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	25
-	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	24
-	1	1	1	1	1	1	980371-4	SCR,SHC SHLD	23
-	1	1	1	1	1	1	690472-2	STRIPPER	22
-	1	1	1	1	1	1	1-18023-1	SCR,SHC (M4X10) STRIPPER	21
-	4	4	4	4	4	4	18025-2	WASHER, LOCK (M4) STRIPPER	20
-	-	-	-	-	-	-	-	-	19
-	-	-	-	-	-	-	-	-	18
-	1	-	-	1	-	-	1338684-1	HOLDER, SHEAR, FRONT (NO-CUT)	17
-	-	-	-	-	-	-	-	-	16
-	-	-	-	-	-	-	-	-	15
-	-	-	-	-	-	-	-	-	14
-	-	-	-	-	-	-	-	-	13
-	1	1	1	1	1	1	5-22280-0	SPRING, SHEAR	12
-	1	1	1	1	1	1	356885-4	STOP, SHEAR	11
-	-	-	-	-	-	-	-	-	10
-	1	1	1	1	1	1	1320921-1	HOLDER, SHEAR, FRONT (CUT)	9
-	1	1	1	1	1	1	462006-1	SHEAR, FLOAT (FRONT)	8
1	2	2	2	1	1	1	3-1333201-7	ANVIL	7
-	-	-	-	-	-	-	-	-	6
-	-	-	-	-	-	-	-	-	5
-	1	1	1	1	1	1	2-455889-0	DEPRESSOR, SHEAR (FRONT)	4
-	1	1	1	1	1	1	1-238011-0	SPACER, BLOCK CRIMPER	3
1	2	2	2	1	1	1	7-683454-8	CRIMPER, INSULATION	2
-	1	1	1	1	1	1	455888-5	SPACER, CRIMPER	1
1	2	2	2	1	1	1	4-456402-1	CRIMPER, WIRE	1

DIMENSIONS: mm (INCHES)		MATERIAL		FINISH	
DO NOT SCALE PRINT.					
TOLERANCES UNLESS OTHERWISE SPECIFIED:					
1 PLC DEC ±0.5 [0.02 IN]					
2 PLC DEC ±-					
3 PLC DEC ±-					
ANGLES ±-					
SURF TEXTURE, REMOVE BURRS, BREAK SHARP EDGES RO.3B MAX					
DR	06NOV01	APP	06NOV01	HT TR	FIN
L.LOFTHOUSE	F.BACKHURST	REL	07-12-01		
CHK			M.CLIFFORD		
NAME		MACHINE REF		REV	
FINE ADJ SIDE FD HD-I APPL		HD-I APPL		D1	
SCALE	D	DWG NO	1528064	SHEET	1 OF 1
CASE CODE	00779	CUSTOMER AND ASSEMBLY DRAWING		RESTRICTED TO	

THIS DRAWING IS A CONTROLLED DOCUMENT

LAYOUT L1528064 SET UP GAGE 458637-3

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED. © COPYRIGHT 2001 AMP 1756 REV 3-92

1528064

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru