

(4.00 mm) .1575"

IJ5H-02-0600-S-2-02SP2

IJ5H-08-0300-S-2-03SP2

IJ5H SERIES

50 Ω HYBRID RF CABLE ASSEMBLY

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?IJ5H

Insulator Material:

Black LCP

Contact Material:

Copper Alloy

Pin Material:

Copper Alloy

Dielectric Material:

Black LCP

Plating:

Au over 50 μ" (1.27 μm) Ni

Operating Temp Range:

-40 °C to +90 °C

RoHS Compliant:

Yes

Cable (-2):

Conductor Size:

26 AWG,
(0.51 mm) .020" dia.

Conductor Material:

Silver and Copper
Plated Steel Wire

Insulator Diameter:

(1.52 mm) .060"

Insulator Material:

PTFE

Shield Material:

Silver Plated Copper Wire

Jacket Material:

FEP

Jacket Diameter:

(2.54 mm) .100"

Bend Radius:

12.7 mm

Impedance:

50 Ω

Current Rating:

5A DC

RoHS Compliant:

Yes

Mates with:

IP5, SMA, MCX, MMCX,
SMB5

Low-cost isolated
transmission line
system

RG 316 Cable

1, 2, 4, 6 or 8
Positions

Positive
latching

Choice of traditional
RF end options

**EDGE
RATE®**
 CONTACT
IJ5H**NO. OF
POSITIONS****ASSEMBLED
LENGTH****END 1
PLATING****CABLE
TYPE****END 2
OPTION**
**-01, -02,
-04, -06, -08**

—"XXXX"
= Assembled
Length
in millimeters
-0300 to -1000
(1000 mm) 39.40"
maximum


-S
= 30 μ"
(0.76 μm)
Gold on
contact

-2
= RG 316
cable

All Gold
-01SP1
= SMA
Straight Plug
-02SP1
= MCX
Straight Plug
-03SP1
= MMCX
Straight Plug
-07SP1
= SMB
Straight Plug

Gold/Nickel
combination
-02SP2
= MCX
Straight Plug
-03SP2
= MMCX
Straight Plug
-07SP2
= SMB
Straight Plug

NO. OF POSITIONS	A
-01	(20.87) .822
-02	(24.87) .979
-04	(32.87) 1.294
-06	(40.87) 1.609
-08	(48.87) 1.924

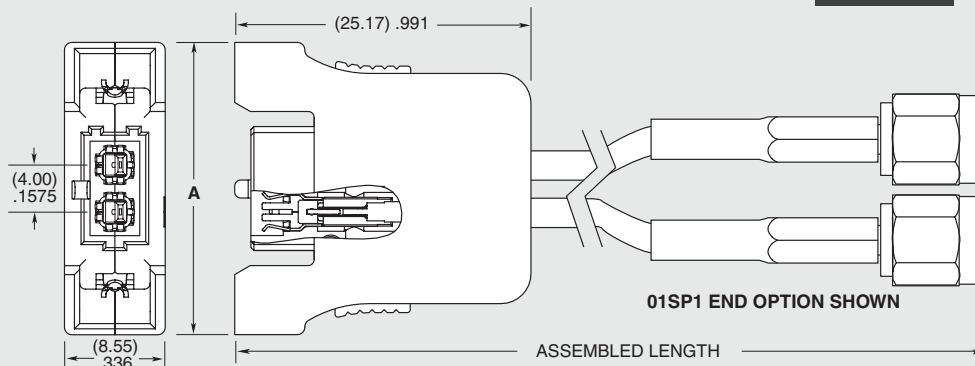

Note:
This Series is non-standard,
non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru