


## CUSTOMER DRAWING

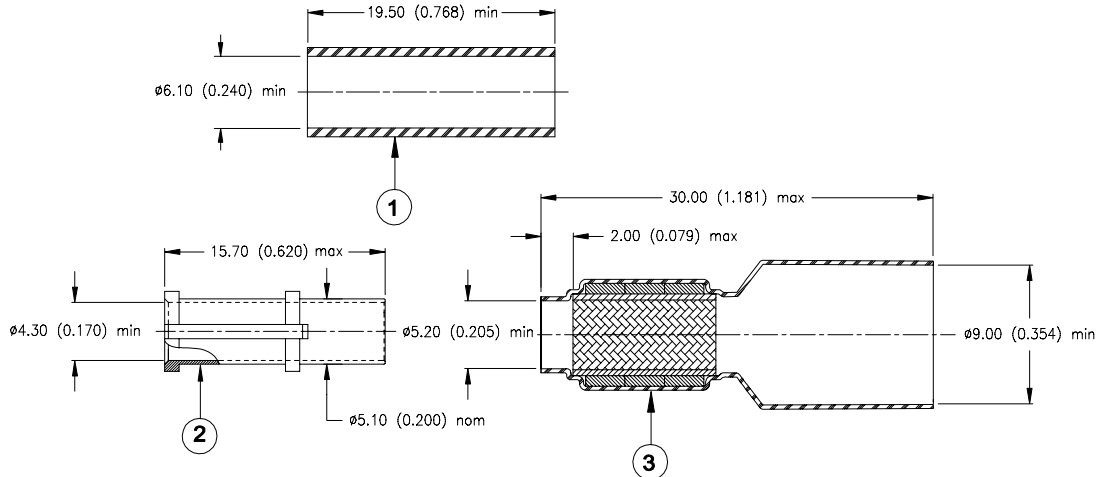


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
3. SOLDERSHIELD DEVICE:
  - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
  - Copper braid pre-tinned with Sn96Ag4 solder alloy with activated rosin flux.
  - Solder Preform: Sn96Ag4 solder alloy, with activated rosin flux.


### APPLICATION

1. These parts are used on Tyco Electronics/Raychem Hexashield adaptors.
2. Cable Type: Single or multi-conductors shielded cable: Raychem Spec 44 or Spec 55, single braid. (tin, silver or nickel-plated copper braid)
3. Temperature range: -65°C to +175°C.
4. For all other application, contact Tyco Electronics/Raychem technical service.

#### Cable dimensions:



#### Maximum quantity of braids: 4



Cable Dimensions				
øA		øB		øC
Min.	Max.	Min.	Max.	Max.
4.30 (0.169)	8.90 (0.350)	3.50 (0.138)	6.20 (0.244)	4.20 (0.165)

### PART NUMBERING

HET-A-04X

→ Ferrule Plating:

B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test.

C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

### INSTALLATION

See Tyco Electronics/Raychem installation procedure RPIP-696-00.

		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: <b>FERRULE AND SOLDERSHIELD DEVICE                  FOR HEXASHIELD ADAPTERS</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			<i>Raychem</i>		DOCUMENT NO.: <b>HET-A-04X</b>	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: <b>A</b>	DATE: <b>11-May-07</b>	
DRAWN BY: <b>K. YEE</b>	CAGE CODE: <b>06090</b>	REPLACES: <b>D030535</b>	ECO NUMBER: <b>07-010934</b>	SCALE: <b>NTS</b>	SIZE: <b>A</b>	SHEET: <b>1 of 1</b>

© 2006-2007 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check the latest revision.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)