

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
21EN65-RB1

21EN65-RB1

M

DRAWING
NUMBER

ISSUE

II

REPLACES

PR-8581

CHECK

REVISIONS

A CO44351

J A P

13 SEPT 79

B PR 8581

G J W

21 MAR 80

C CO47573

PART 4

R J H

11 AUG 80

CHECK

5 OCT 79

CHECK

5 OCT 79

CHECK

5 OCT 79

CHECK

5 OCT 79

CHECK

FO-5285 1-B

ROLLER GUIDE MAY BE LOCKED IN INCREMENTS
OF 45° AZIMUTH MAY ALSO BE UNSCREWED
AND REMOVED FROM BUSHING TO FACILITATE
INSTALLATION $\triangle 3$

.072 $\pm$.004 X .038 $\pm$.003 DEEP
KEYWAY TO WITHIN .250 OF
SHOULDER



1.781 $\pm$.030
FREE
POSITION

.657 $\pm$.030

.047 DIA HOLE FOR
WIRE LOCKING

2.200 MAX

1.0 DIA

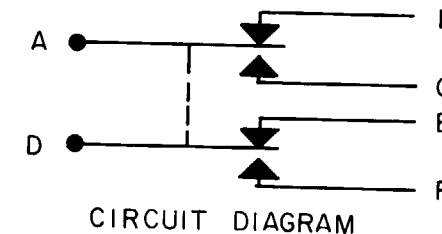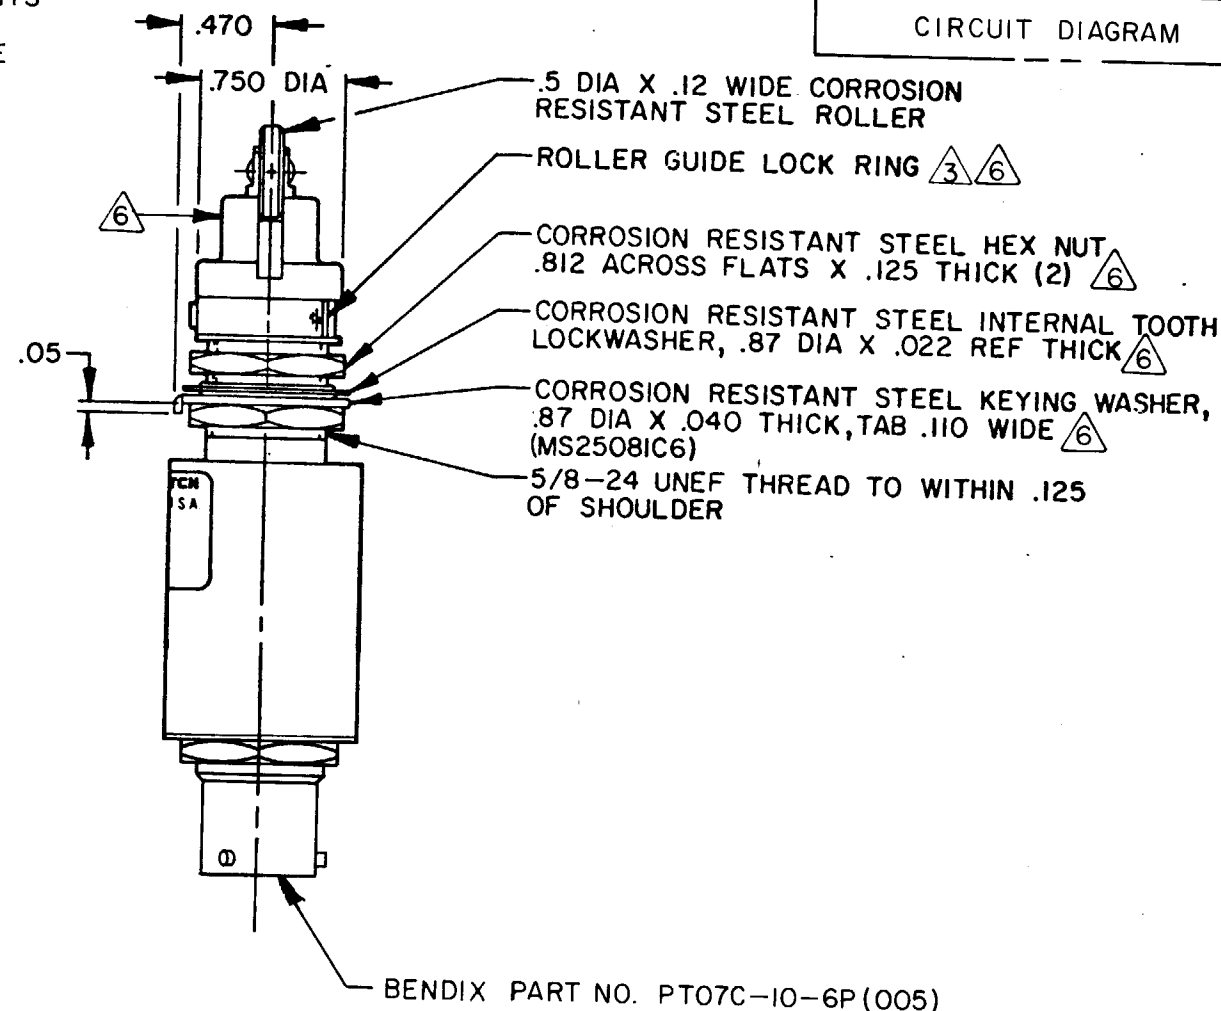

NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
- $\triangle 3$ TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
- 4 - CIRCUIT DIAGRAM AND CAT. LIST. ARE SHOWN ON NAMEPLATE
- 5 - CONTACTS "A" - "C" AND "D" - "F" MAKE WITHIN .003 CONTACTS "A" - "B" AND "D" - "E" MAKE WITHIN .006
- $\triangle 6$ - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE ----- 6-12 LB		CONTACT ARRANGEMENT	
DIFFERENTIAL FORCE ----- 30 LB MAX		S P D T (2)	
RELEASE FORCE ----- 4 LB MIN		28 VDC	
PRETRAVEL ----- .040 MAX		LOAD	SEA LEVEL
DIFFERENTIAL TRAVEL ----- .020 MAX		RES	50,000 FT.
OVERTRAVEL ----- .250 MIN		IND	
		MOTOR	

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/16	X
ONE PLACE	X.X	0.0015	X.X
TWO PLACES	X.XX	0.0005	X.XX
THREE PLACES	X.XXX	0.0001	X.XXX
ANGLES			

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION

WEIGHT 3.75 OZ MAX

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru