THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED SHELL MATERIAL	18MAY16	BL	J.L

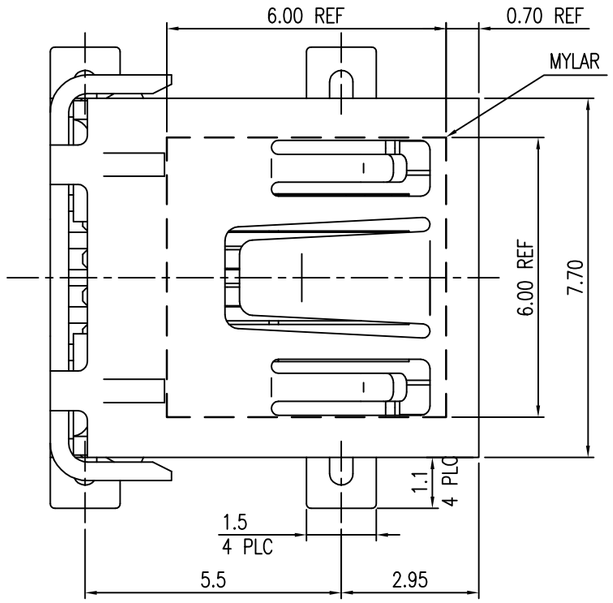

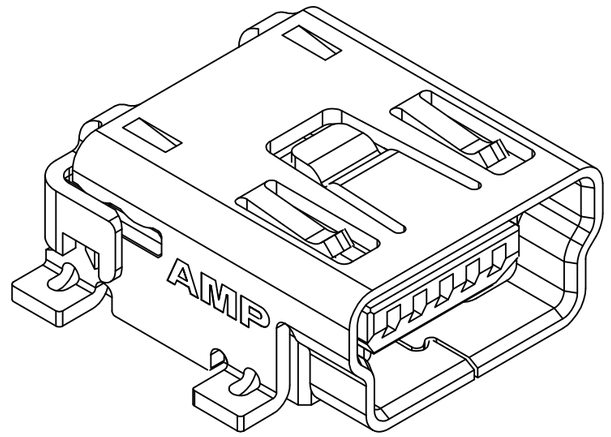

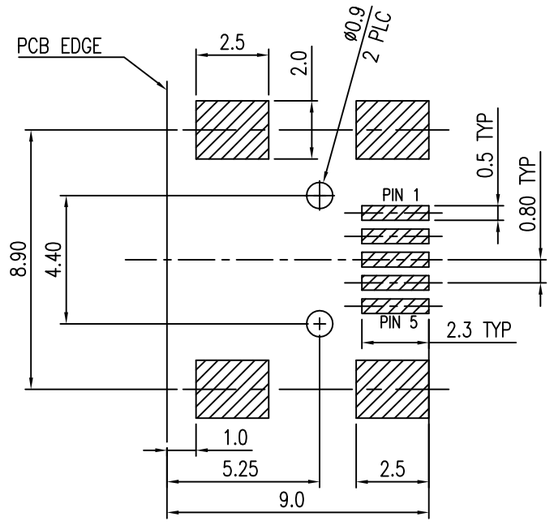

RECOMMENDED PCB LAYOUT (MOUNTING SIDE)
THICKNESS 1.57mm (TOLERANCE: ±0.05)

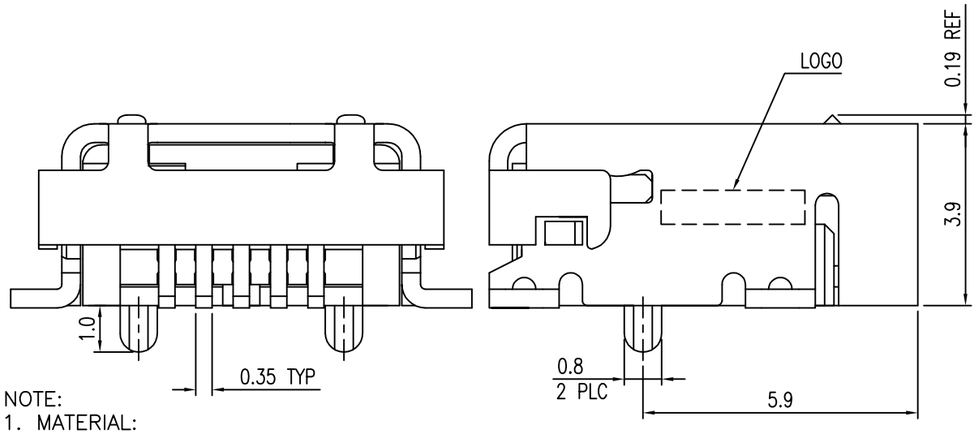

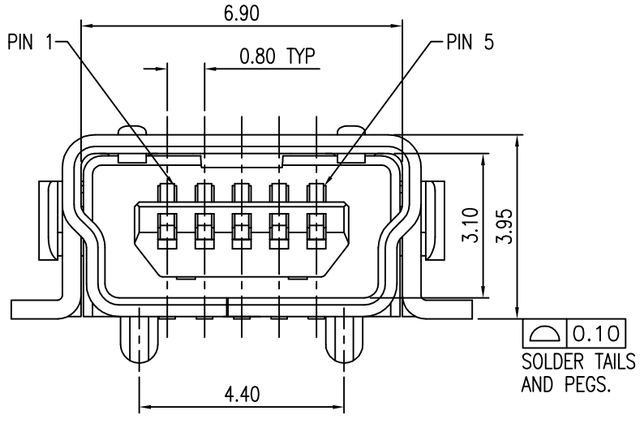

NOTE:
1. MATERIAL:
   HOUSING: PA9T WITH 33% GF, UL 94V–0, COLOR: SEE TABLE.
   CONTACTS: PHOSPHOR BRONZE.
   SHELL: SUS304,THICKNESS=0.40MM.
   MYLAR: POLYAMIDE FILM.
2. FINISH:
   CONTACTS: GOLD FLASH OVER
   0.762µm [30µ"] MIN. PALLADIUM–NICKEL PLATED ON CONTACT AREA,
   Ⓐ 2.54µm [100µ"] MIN. MATTE–TIN ON SOLDER TAIL,
   Ⓑ 2.54µm [100µ"] MIN. MATTE–TIN ON SOLDER TAIL,
   Ⓒ 3.05µm [120µ"] MIN. MATTE–TIN ON SOLDER TAIL,
   WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
   SHELL: Ⓐ & Ⓑ 1.27µm [50µ"] MIN. NICKEL PLATED OVERALL.
   Ⓒ 0.76µm [30µ"] MIN. MATTE–TIN OVER 1.27µm [50µ"] MIN. NICKEL.
3. NO DATECODE ON PRODUCT SURFACE.
4. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109–201, CONDITION B.

Ⓒ	BLACK	W/O	W/O	TAPE REEL	W/	3–1734035–2
Ⓑ	BLACK	W/	W/O	TAPE REEL	W/	2–1734035–4
	BLACK	W/O	W/	TAPE REEL	W/	2–1734035–3
	BLACK	W/O	W/O	TAPE REEL	W/	2–1734035–2
	BLACK	W/O	N/A	TRAY	W/	2–1734035–1
Ⓐ	NATURAL	W/	W/O	TAPE REEL	W/	1734035–5
	BLACK	W/	W/O	TAPE REEL	W/	1734035–4
	BLACK	W/O	W/	TAPE REEL	W/	1734035–3
	BLACK	W/O	W/O	TAPE REEL	W/	1734035–2
	BLACK	W/O	N/A	TRAY	W/	1734035–1
PLATED	HOUSING COLOR	MYLAR	LONG CARRIER & COVER TAPE	PACKAGE	POST	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.38
1 PLC	± 0.25
2 PLC	± 0.13
3 PLC	± 0.05
4 PLC	± –
ANGLES	± 3°

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN	21DEC2007 O. HU
CHK	21DEC2007 S. HOU
APVD	21DEC2007 W. KODAMA
PRODUCT SPEC	108–57062
QUALIFICATION TEST REPORT	501–57070
WEIGHT	––

TE Connectivity

NAME: MINI USB, R/A, SMT, B TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1734035	—

CUSTOMER DRAWING | SCALE — | SHEET 1 OF 4 | REV F

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

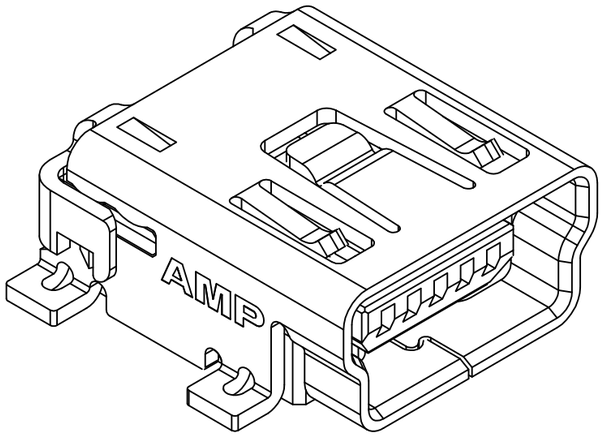

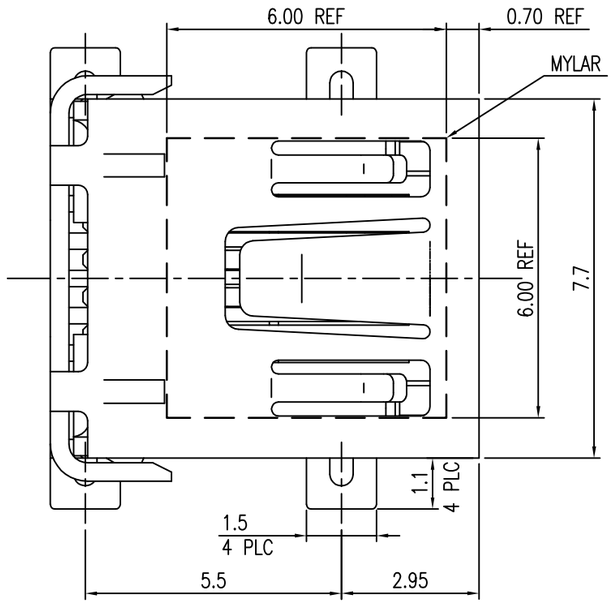

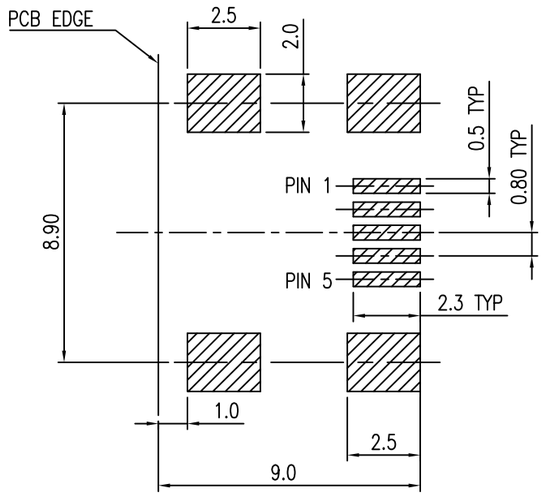

RECOMMENDED PCB LAYOUT (MOUNTING SIDE)
THICKNESS 1.57mm (TOLERANCE:±0.05)

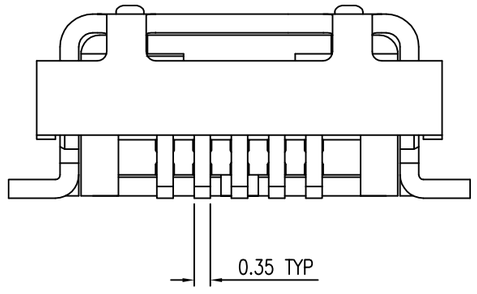

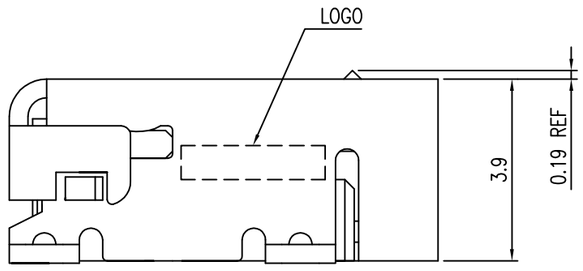

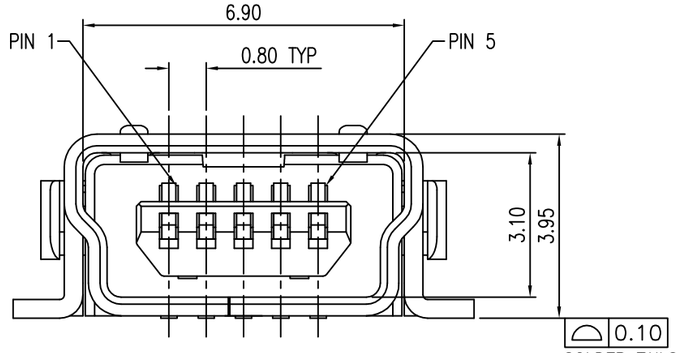

NOTE:

1. MATERIAL:
   HOUSING: PA9T WITH 33% GF, UL 94V–0, BLACK COLOR.
   CONTACTS: PHOSPHOR BRONZE.
   SHELL: SUS304,THICKNESS=0.40MM.
   MYLAR: POLYAMIDE FILM.

2. FINISH:
   CONTACTS: GOLD FLASH OVER
   0.762μm [30μ"] MIN. PALLADIUM–NICKEL PLATED ON CONTACT AREA,
   2.54μm [100μ"] MIN. MATTE–TIN ON SOLDER TAIL, WITH
   ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
   SHELL: 1.27μm [50μ"] MIN. NICKEL PLATED OVERALL.

3. NO DATECODE ON PRODUCT SURFACE.

4. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109–201, CONDITION B.

W/	W/O	TAPE REEL	W/O	4–1734035–2
W/O	W/	TAPE REEL	W/O	1–1734035–3
	W/O	TAPE REEL	W/O	1–1734035–2
	N/A	TRAY	W/O	1–1734035–1
MYLAR	LONG CARRIER & COVER TAPE	PACKAGE	POST	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.38
1 PLC	± 0.25
2 PLC	± 0.13
3 PLC	± 0.05
4 PLC	± –
ANGLES	± 3°

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN | CHK | APVD | PRODUCT SPEC: — | APPLICATION SPEC: — | WEIGHT: –

TE Connectivity

NAME: MINI USB, R/A, SMT, B TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1734035	—

CUSTOMER DRAWING | SCALE — | SHEET 2 OF 4 | REV F

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

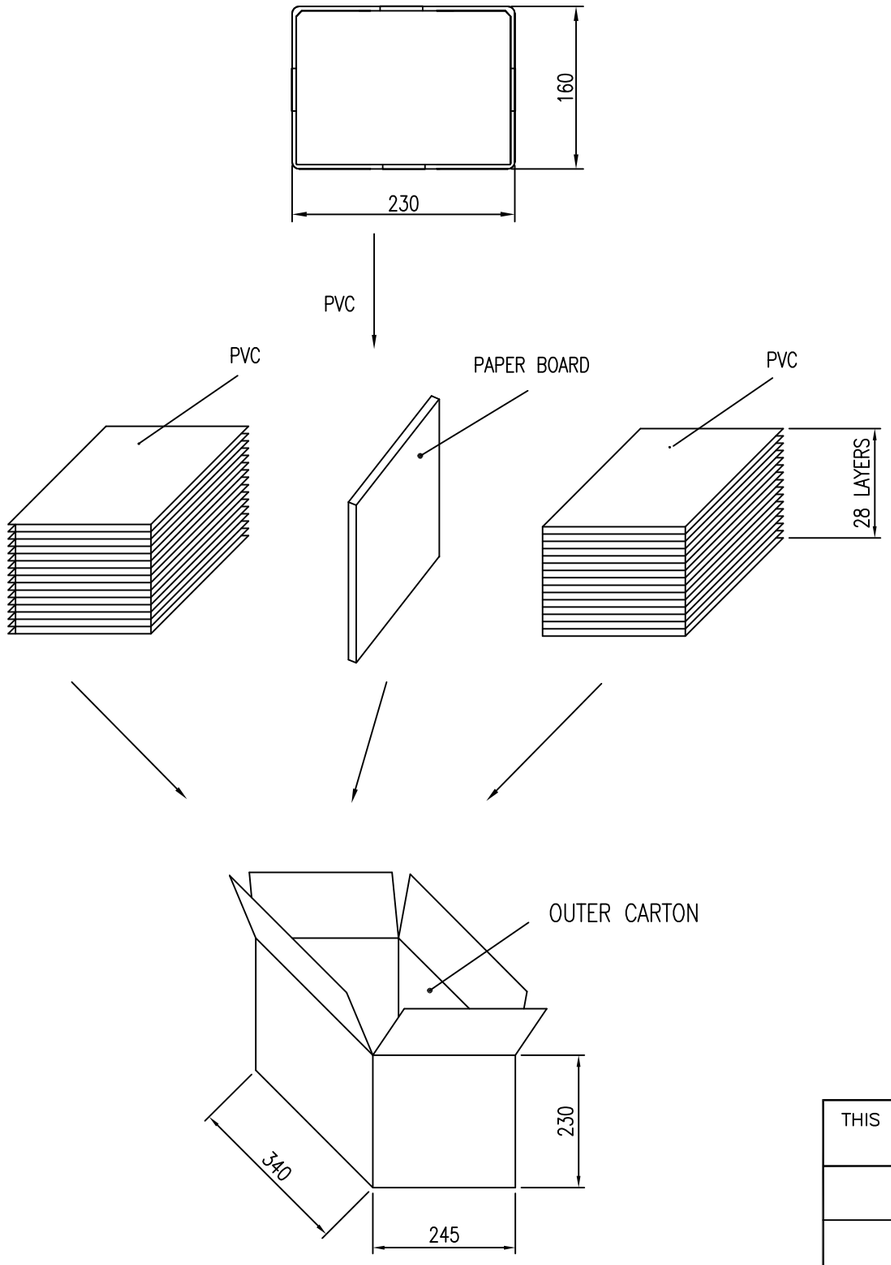

8.25 Kg	5.55 Kg	150	56	8400 PCS	2–1734035–1 1–1734035–1 1734035–1
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN
CHK
APVD
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME MINI USB, R/A, SMT, B TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1734035	—

CUSTOMER DRAWING | SCALE — | SHEET 3 OF 4 | REV F

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

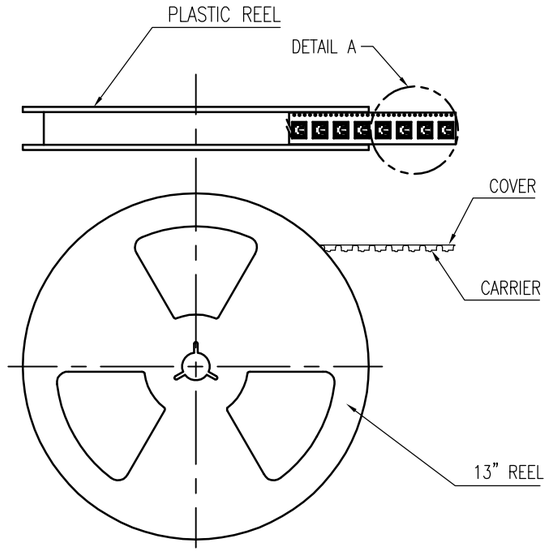



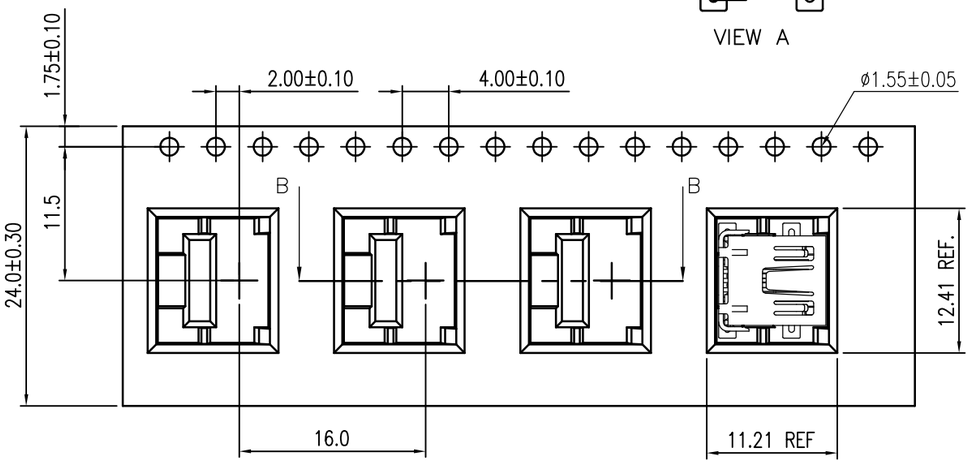

DETAIL A



SECTION B–B

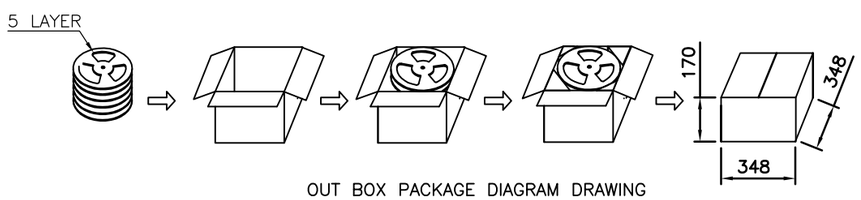

OUT BOX PACKAGE DIAGRAM DRAWING

FOR 1734035–3, 1–1734035–3 AND 2–1734035–3 (LONG CARRIER & COVER TAPE)

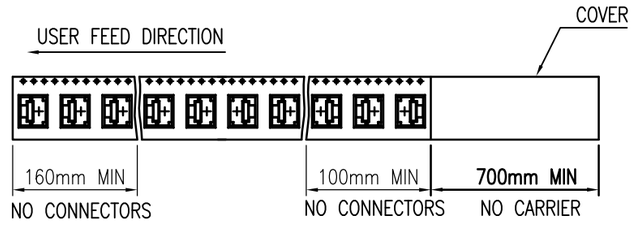

FOR 1734035–2, 1734035–4, 1734035–5, 1–1734035–2,
3–1734035–2, 2–1734035–2, 2–1734035–4, 4–1734035–2

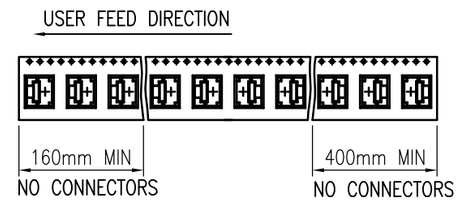

GROSS WEIGHT	NET WEIGHT	PCS/REER	REERS /CARTON	QUANTITY	MYLAR	LONG CARRIER & COVER TAPE	PART NUMBER
4.95 Kg	2.31 Kg	700	5	3500	W/	W/O	4–1734035–2
					W/O	W/O	3–1734035–2
					W/	W/O	2–1734035–4
					W/O	W/	2–1734035–3
					W/O	W/O	2–1734035–2
					W/O	W/	1–1734035–3
					W/O	W/O	1–1734035–2
					W/	W/O	1734035–5
					W/	W/O	1734035–4
					W/O	W/	1734035–3
					W/O	W/O	1734035–2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN
CHK
APVD
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT –

TE Connectivity

NAME MINI USB, R/A, SMT, B TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1734035	—

CUSTOMER DRAWING | SCALE — | SHEET 4 OF 4 | REV F

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru