

## Series TB300 & TB345

### Double Row Terminal Blocks

#### SPECIFICATIONS

Rating: TB300 – 30A, 600V\*

TB345 – 45A, 600V\*

Center Spacing: .562" or 9/16" (14.28 mm)

Wire Size: #10 - 22 AWG CU

Screw Size: TB300 – #8-32 philslot screws

TB345 – #10-32 philslot screws

Torque Rating: #8 screws - 16 in-lb.;

#10 screws - 20 in-lb.

Distance Between Barriers: .41" (10.5 mm)

Mounting: TB300 – #8 screws; TB345 – #10 screws

Material: Molded base: Black, UL rated 94VO thermoplastic

Terminal plating: Tin over brass; Screws: Zinc plated steel

Operating Temperature: 130°C (260°F) max., -40°C (-40°F) min.

Breakdown Voltage: 7500V rms

Approvals: UL E62622; CSA LR15364; IEC Compliance;

CE Certified


\* Max. rating shown; some options may be rated lower - consult factory.

| Poles | A    | B    | Poles | A     | B     | Poles | A     | B     |
|-------|------|------|-------|-------|-------|-------|-------|-------|
| 02    | 2.13 | 1.69 | 10    | 6.62  | 6.19  | 18    | 11.12 | 10.68 |
| 03    | 2.69 | 2.25 | 11    | 7.18  | 6.75  | 19    | 11.68 | 11.25 |
| 04    | 3.25 | 2.81 | 12    | 7.75  | 7.31  | 20    | 12.24 | 11.81 |
| 05    | 3.81 | 3.37 | 13    | 8.31  | 7.87  | 21    | 12.80 | 12.37 |
| 06    | 4.37 | 3.94 | 14    | 8.87  | 8.44  | 22    | 13.37 | 12.93 |
| 07    | 4.94 | 4.50 | 15    | 9.43  | 9.00  | 23    | 13.93 | 13.50 |
| 08    | 5.50 | 5.06 | 16    | 9.99  | 9.56  | 24    | 14.49 | 14.06 |
| 09    | 6.06 | 5.62 | 17    | 10.56 | 10.12 |       |       |       |

\* Dimensions in inches. To convert to millimeters, multiply by 25.4.



TB300 & TB345

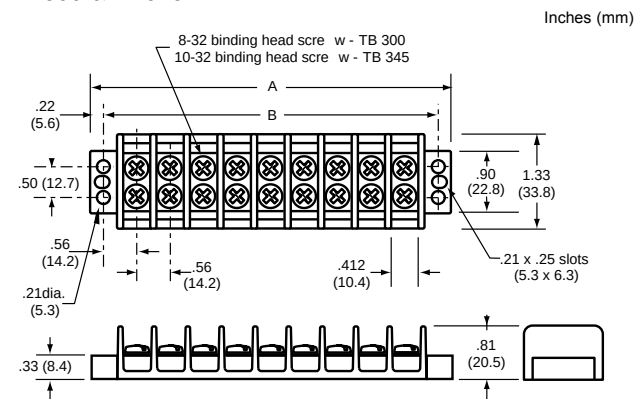

## Part Numbering System

#### Series



300 - 8/32 screw  
345 - 10/32 screw

#### Poles



02 to 24

#### Screw Options



Blank - std. screws  
00 - screws shipped bulk  
B - brass philslot, nickel plated  
BS - brass Sems philslot, zinc plated (TB300 only)  
SP - steel Sems philslot, zinc plated  
ST - stainless steel, philslot

#### Marking



L1 to L6 - std. marking  
Marker strips (pg 33)  
Covers (pg 32)

#### Hardware Options



QC1 to QC20 - quick connects (TB300 only)

## Screw Options



B  
Brass Philslot  
Nickel Plated



BS  
Brass SEMS  
Philslot Nickel Plated



SP  
Steel SEMS  
Philslot Zinc Plated



ST  
Stainless Steel  
Philslot

## Hardware Options

Quick Connects – Assembled TB300 only. Terminals .250" x .031". Max. current rating 20 Amps. For other orientations, contact factory.




QC1




QC2



QC3




QC4



QC5



QC6



QC7




QC8




QC9




QC10



QC11



QC12



QC13




QC14




QC15




QC16




QC17



QC18



QC19



QC20


Quick Connects – Bulk \*TB300 only. Min. order per part no. – 100 pieces.



QC201  
Flat – none



QC202  
QC 45° – none



QC203  
QC 90° – none



QC204  
Flat – Flat



QC205  
Flat – QC 45°



QC206  
Flat – QC 90°



QC207  
QC 45° – QC 45°



QC208  
QC 45° – QC 90°




QC209  
QC 90° – QC 90°


Jumpers – Bulk Min. order per part no. – 100 pieces. Contact factory for jumper assembly.



J301  
Flat slip-on  
(TB300 only)



OJ6  
Closed over barrier



OJ11  
Slip-on over barrier

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)