

Surge protection connector - PT 4-12DC-ST - 2839237

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Protective plug PT with protective circuit for a 4-core floating signal circuit. Nominal voltage: 12 V DC


The illustration shows the version PT 4-5 DC-ST

Why buy this product

- Plugs can be checked with CHECKMASTER
- Maximum ease of maintenance thanks to the two-piece design
- Base element remains an integral part of the installation
- Consistent plug-in signal circuit protection
- Impedance-neutral disconnection of plug for test and maintenance purposes



Key commercial data

| | |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 |
| Minimum order quantity | 1 |
| Catalog page | Page 96 (TT-2011) |
| GTIN |  4 017918 182779 |
| Custom tariff number | 85363010 |
| Country of origin | GERMANY |

Technical data

General

| | |
|------------------------------------------|-----------------------------------------|
| Housing material | PA 6.6 |
| Inflammability class according to UL 94 | V0 |
| Color | black |
| Standards for air and creepage distances | VDE 0110-1 |
| Standards for air and creepage distances | IEC 60664-1 |
| Total surge current (8/20) μ s | 20 kA |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Mounting type | On base element |
| Design | DIN rail module, two-section, divisible |

Surge protection connector - PT 4-12DC-ST - 2839237

Technical data

General

| | |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Degree of protection | IP20 |
| Direction of action | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/ Shield-Earth Ground |
| Arrester can be tested with CHECKMASTER from software version: | From SW rev. 1.00 |
| Width | 17.7 mm |
| Height | 45 mm |
| Depth | 52 mm |
| Pitch unit | 1 Div. |

Protective circuit

| | |
|------------------------------------------------------------------------------|----------------------------|
| IEC category | C1 |
| IEC category | C2 |
| IEC category | C3 |
| IEC category | D1 |
| VDE requirement class | C1 |
| VDE requirement class | C2 |
| VDE requirement class | C3 |
| VDE requirement class | D1 |
| Nominal voltage UN | 12 V DC |
| Maximum continuous operating voltage UC | 12.8 V DC |
| Maximum continuous operating voltage UC | 9 V AC |
| Maximum continuous voltage UC (wire-wire) | 12.8 V DC |
| Maximum continuous voltage UC (wire-wire) | 9 V AC |
| Nominal current IN | 2 A (80 °C) |
| Operating effective current IC at UC | ≤ 1 mA |
| Ground conductor current IPE | ≤ 4 μA (Directly grounded) |
| Ground conductor current IPE | ≤ 1 μA (BE: 4+F) |
| Nominal discharge surge current In (8/20) μs (Core-Core) | 690 A |
| Nominal discharge surge current In (8/20) μs (Core-Earth) | 10 kA |
| Total surge current (8/20) μs | 20 kA |
| Max. discharge surge current I _{max} (8/20) μs maximum (Core-Core) | 690 A |
| Max. discharge surge current I _{max} (8/20) μs maximum (Core-Earth) | 10 kA |
| Nominal pulse current I _{an} (10/1000) μs (Core-Core) | 128 A |
| Lightning test current (10/350) μs, peak value I _{imp} | 2.5 kA (per path) |
| Output voltage limitation at 1 kV/μs (Core-Core) spike | ≤ 20 V |
| Output voltage limitation at 1 kV/μs (Core-Earth) spike | ≤ 450 V |
| Output voltage limitation at 1 kV/μs (Core-Earth) spike | ≤ 1 kV (BE: 4+F) |
| Output voltage limitation at 1 kV/μs (Core-Core) static | ≤ 18 V |
| Residual voltage at I _n , (conductor-conductor) | ≤ 50 V |
| Residual voltage with I _{an} (10/1000)μs (conductor-conductor) | ≤ 25 V |
| Protection level UP (Core-Core) | ≤ 40 V (C1 (1 kV/500 A)) |

Surge protection connector - PT 4-12DC-ST - 2839237

Technical data

Protective circuit

| | |
|----------------------------------------------------------------|-------------------------------|
| Protection level UP (Core-Earth) | ≤ 450 V |
| Protection level UP (Core-Earth) | ≤ 1 kV (BE: 4+F) |
| Response time tA (Core-Core) | ≤ 1 ns |
| Response time tA (Core-Earth) | ≤ 1 ns |
| Response time tA (Core-Earth) | ≤ 100 ns |
| Input attenuation aE, sym. | 0.1 dB (≤ 600 kHz) |
| Cut-off frequency fg (3 dB), sym. in 50 Ohm system | Typ. 3 MHz |
| Message: Surge protection fault | None |
| Max. required back-up fuse | 2 A (e.g. T (IEC 127-2/III)) |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Core) | C1 (1 kV / 500 A) |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Core) | C3 (100 A) |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth) | C2 (10 kV/5 kA) |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth) | D1 (2.5 kA) |

Connection data

| | |
|----------------------------------------|--------------------------------------------------------|
| Connection method | Screw connection (in connection with the base element) |
| Connection type IN | PLUGTRAB plug-in system |
| Connection type OUT | PLUGTRAB plug-in system |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm |
| Stripping length | 8 mm |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |

Connection, protective circuit

| | |
|-----------------------|-----------------|
| Standards/regulations | IEC 61643-21 |
| Standards/regulations | DIN EN 61643-21 |
| Standards/regulations | UL 497B |

Classifications

eClass

| | |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130807 |
| eCl@ss 7.0 | 27130807 |

Surge protection connector - PT 4-12DC-ST - 2839237

Classifications

etim

| | |
|----------|----------|
| ETIM 2.0 | EC000943 |
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11 | 39121610 |
| UNSPSC 12.01 | 39121610 |
| UNSPSC 13.2 | 39121620 |

Approvals

Approvals

Approvals

UL Listed / GOST

Ex Approvals

UL Listed / cUL Listed / cULus Recognized

Approvals submitted

Approval details

| | |
|--------------------|------|
| UL Listed | |
| Nominal current IN | 2 A |
| Nominal voltage UN | 12 V |

| | |
|------|--|
| GOST | |
|------|--|

Accessories

Accessories

Marking

Surge protection connector - PT 4-12DC-ST - 2839237

Accessories

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.1 x 5.2 mm

Zack Marker strip, flat - ZBF 5/WH-100:UNBEDRUCKT - 0808668



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Consecutive numbers 2 - 20, 22 - 40, etc. up to 82 - 100, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Surge protection connector - PT 4-12DC-ST - 2839237

Accessories

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697



Zack Marker strip, flat, Strip, white, Labeled, Printed vertically: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Necessary add-on products

Surge protection base element - PT 4-BE - 2839402



Base element for protective plug PT with protective circuit for a 4-wire floating signal circuit, bridge between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

Additional products

Shield connection - SSA 3-6 - 2839295



shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black

Shield connection - SSA 5-10 - 2839512




Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black


Drawings

Surge protection connector - PT 4-12DC-ST - 2839237

Dimensioned drawing

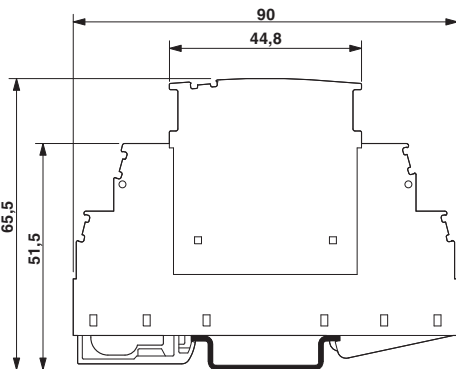

Circuit diagram

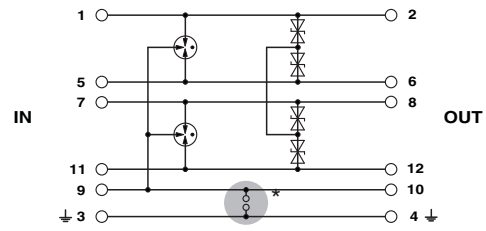

The figure shows the complete module consisting of a base element and connector

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru