



OFCBU/OFCBUGB

Optical Fiber Tube Gripper Saddle

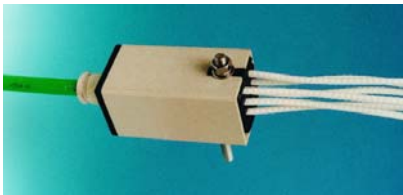

Features

- Cable retention: >1.5kN
- OFBLT retention: >100N
- Maximum of 24 cable elements or 24 fiber bundles

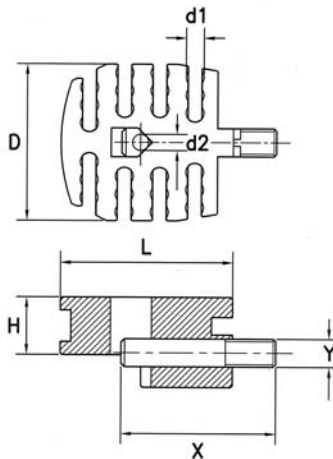

Gland Box Part No.	Cable Diameter
OFCBUGB-00	.16-.33 (4.0 - 8.5)
OFCBUGB-0	.30-.79 (7.5 - 20.0)
OFCBUGB-1	.37-.51 (9.5 - 13.0)
OFCBUGB-2	.51-.71 (13.0 - 18.0)
OFCBUGB-3	.69-.98 (17.5 - 25.0)

Standard Pack: 1 per bag

Description

At distribution points, multi-fiber cables need to have the individual fibers or cable elements separated and protected by a management system. The cable strength member has to be terminated and anchored to prevent damage to the fibers from cable movement or pull out.

The Optical Fiber Cable Breakout Unit affords quick, easy and positive arrangements of the fibers or cable elements, which are sheathed in OFBLT to give permanent protection. Assembly of tubes is made easy by a simple "lay through" design, no threading is required.

The strength member retainer is simply inserted over the terminated cable as shown and clamps both the cable and the breakout unit to the jointing chassis.

A secure fiber management system that minimizes installation time and maximizes fiber integrity and security. Once installed, it can be left with total peace of mind.

For further protection, a gland box is available.

Miniflex technology manufactured by Richco - Patented							
Material: Flame Retardant Nylon, RMS-19 (UL 94V0); Bolt: Stainless Steel • Color: Black							
Part No.	Standard Pack: 10/bag						
	"d1"	"d2"	"D"	"H"	"L"	"X"	"Y"
OFCBU-24-05-19BLK	.20 (5.0)	.19 (4.7)	1.73 (44.0)	.63 (16.0)	1.93 (49.0)	1.73 (44.0)	.31 (8.0)


OFM

Optical Fiber Manifold



Features

- Ability to stack
- Tube retention: >100N
- For OFM Crimp Rings (For terminating GRP strength members) order: OFM-CR
- For a Development Kit containing all adapters, order: OFM-4-05-19BLK
- Gland box also available (see above picture); use part number: OFM-04-PG16BLK

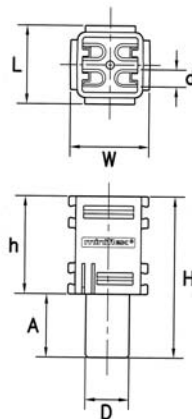

Description

The 1 into 4 Optical Fiber Manifold enables small multiple fiber cables with aramid and similar strength reinforcement or central GRP strength member to be mechanically and securely terminated. OFBLT at the output ports gives full radius control and crush protection while still allowing an easy to route fiber "lay-through" design. OFBLT can also be used at the input port

Part No.	"D"	"h"	"A"	"d"	"H"	"L"	"W"
OFM series	.51 (13.0)	1.14 (29.0)	.73 (18.5)	.20 (5.0)	1.87 (47.5)	0.91 (23.0)	0.91 (23.0)

Miniflex technology manufactured by Richco - Patented							
Material: Flame Retardant Nylon, RMS-19 (UL 94V0); Color: Black							
Part No.	Standard Pack: 10/bag						
	Incoming Cable Size Diameter	Adapter Color					
OFM-C-1-05-19BLK	.098 - .138 (2.5 - 3.5)	Black					
OFM-C-2-05-19BLK	.118 - .157 (3.0 - 4.0)	Blue					
OFM-C-3-05-19BLK	.161 - .197 (4.1 - 5.0)	Brown					
OFM-C-4-05-19BLK	.201 - .236 (5.1 - 6.0)	Green					
OFM-C-5-05-19BLK	.240 - .276 (6.1 - 7.0)	Red					
OFM-C-6-05-19BLK	.280 - .335 (7.1 - 8.5)	Black Rubber					
OFM-C-7-05-19BLK	.335 - .425 (8.5 - 10.8)	Black Rubber					
OFM-T-05-19BLK	.197 (5.0) OFBLT	Split Black					
OFM-T-635-19BLK	.197 - .250 (5.0 - 6.35) OFBLT	Split Blue					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru