



LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	PRODUCTION RELEASE	05 JUN 2019	JW	SH

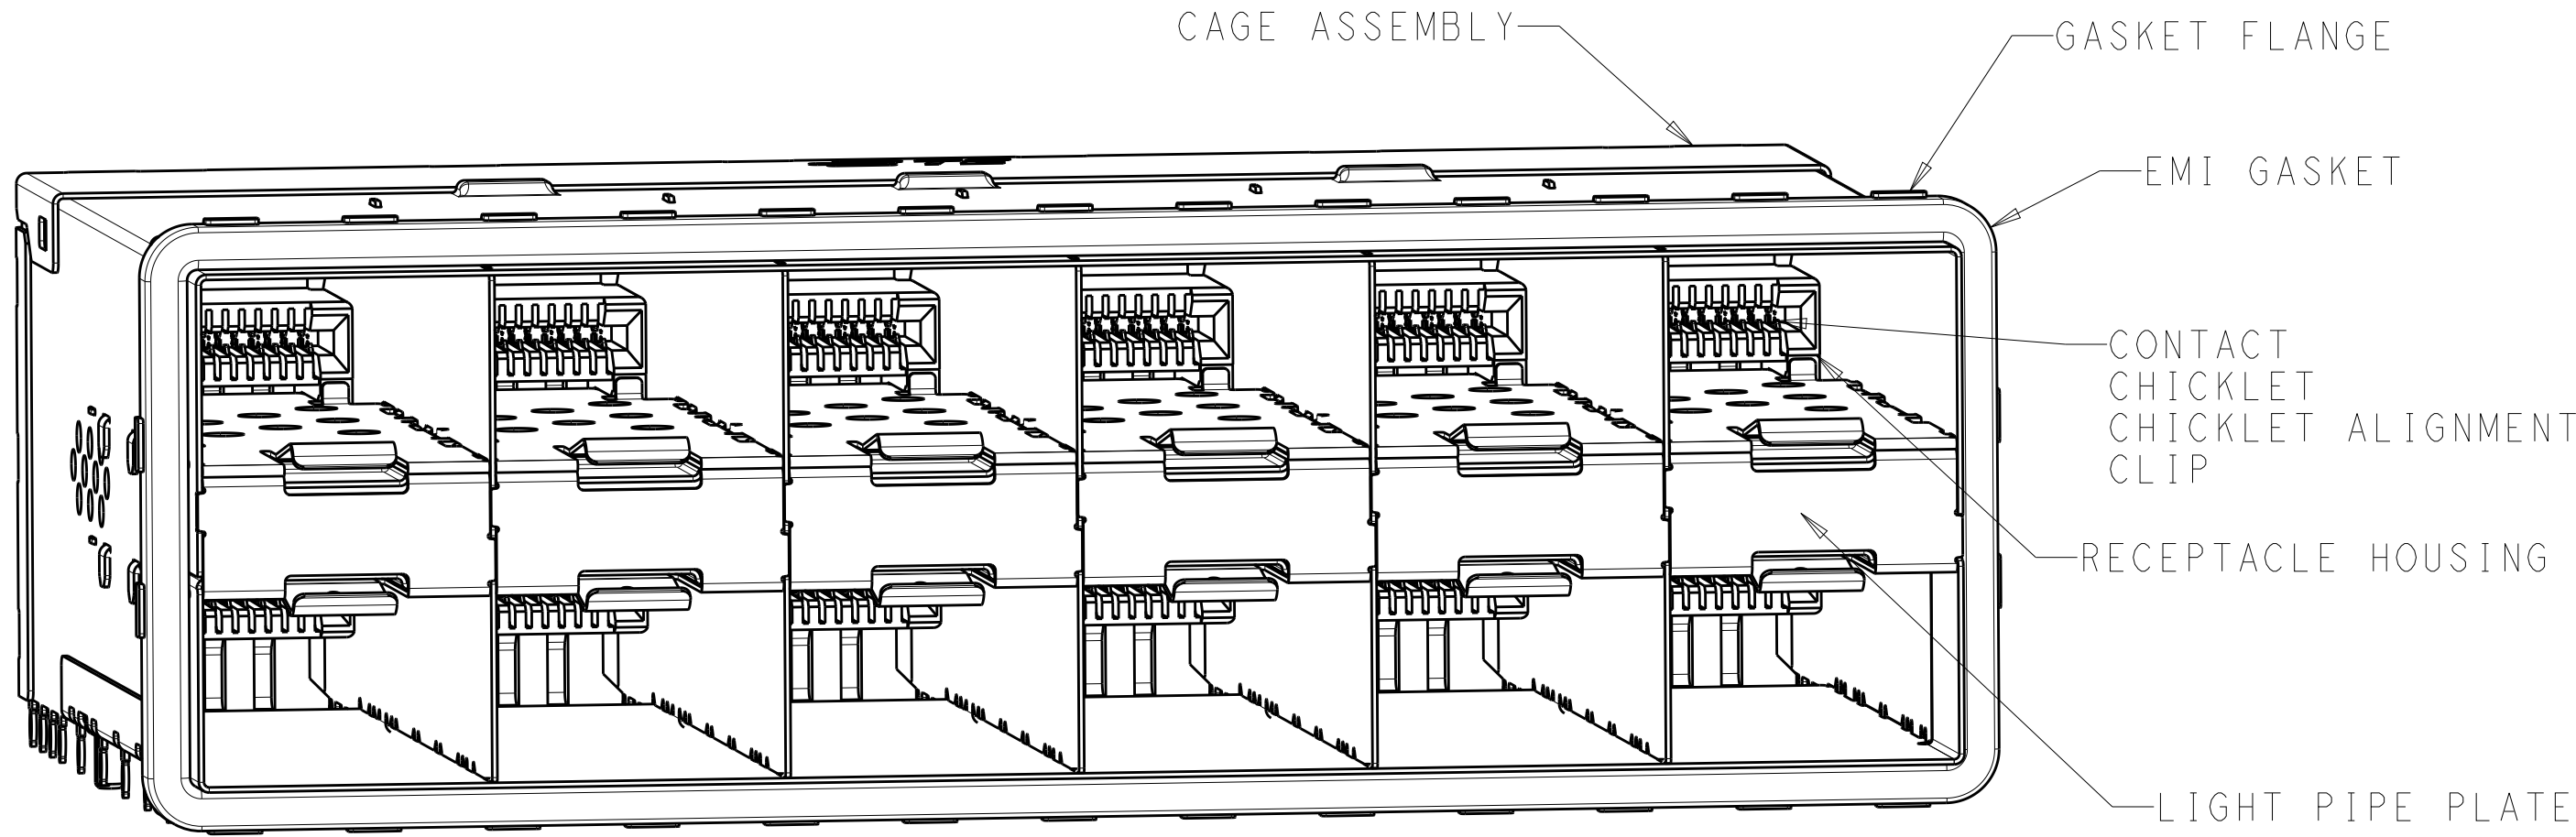

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - LCP, BLACK, UL 94V-O RATED
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE PLATE- STAINLESS STEEL
2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE
3. PCB MINIMUM THICKNESS = 1.5mm



- △4 FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319
- △5 LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm
- △6 DIMENSIONS APPLY FOR EMI SPRINGS ONLY
- △7 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT,
INDICATED BY THE DASHED LINE, TO BE CONSIDERED
THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL
TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED
WITHIN CONNECTOR HOLE PATTERN

2347721-1
SCALE 3:1

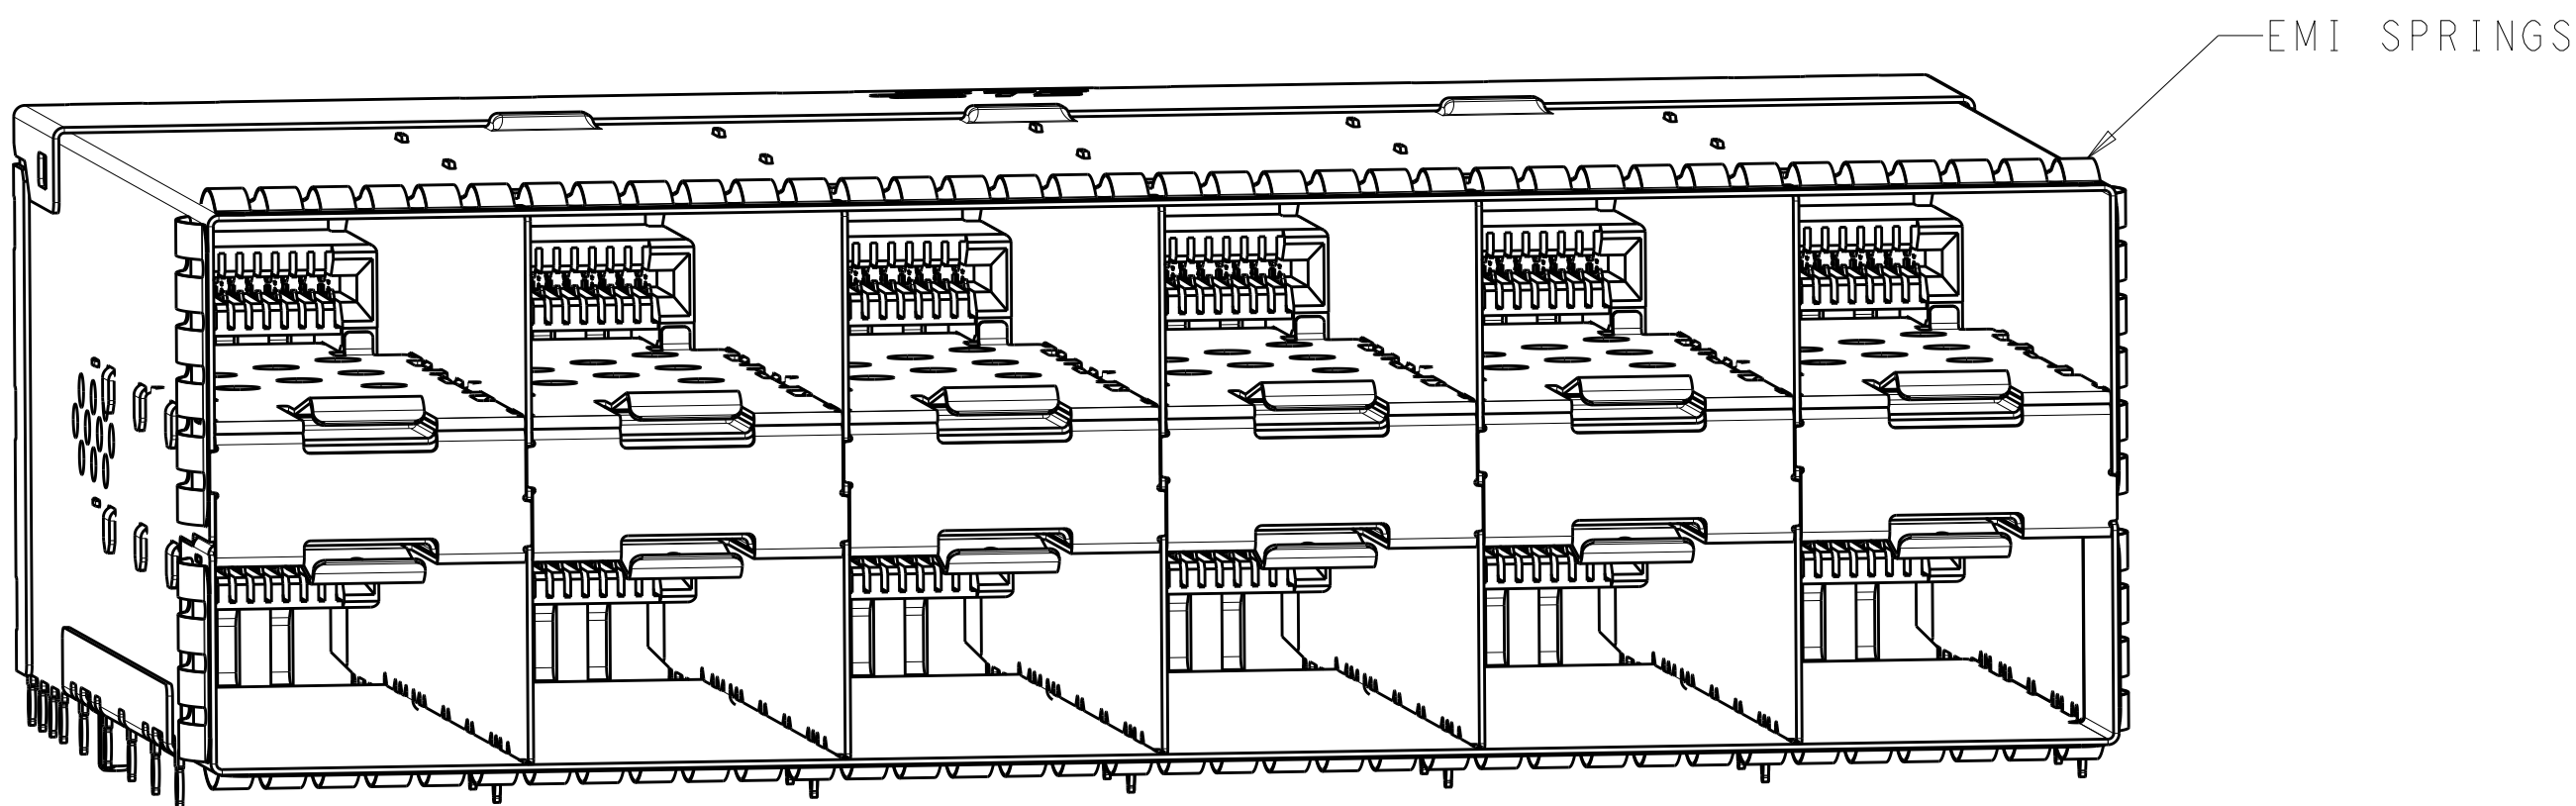


2347721-5
SCALE 3:1


REVERSED INNER LIGHT PIPES
2-2347721-1, 1-2347721-3
SCALE 4:1

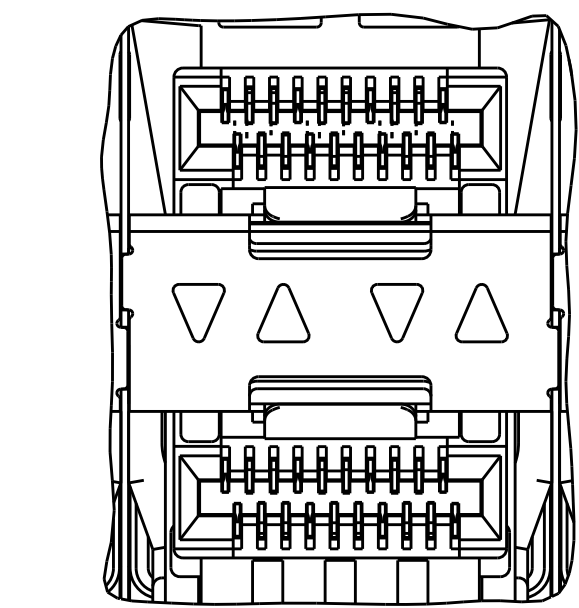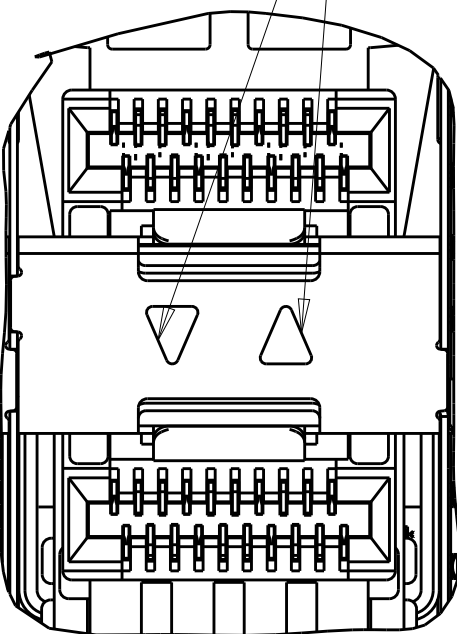


INNER/OUTER LIGHT PIPES
2347721-2, 2347721-6
SCALE 4:1

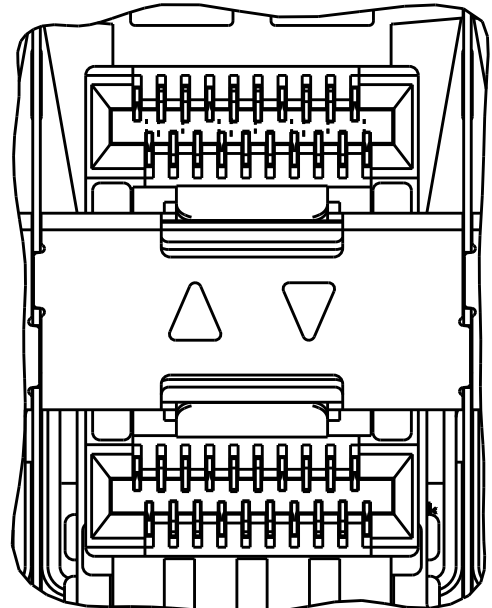


INNER LIGHT PIPES
2347721-3, 2347721-7
SCALE 4:1

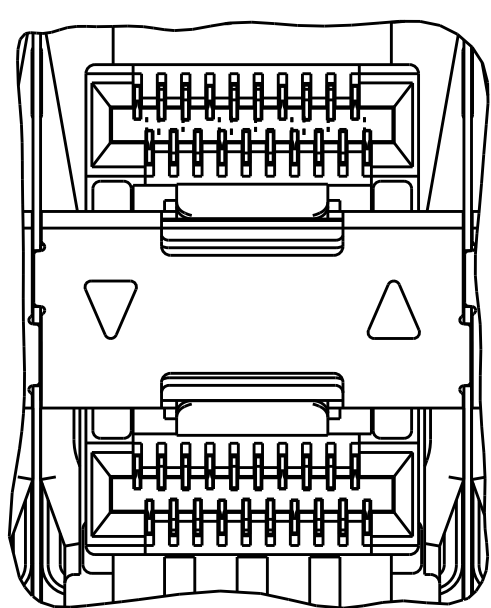

OUTER LIGHT PIPES
2347721-4, 2347721-8
SCALE 4:1

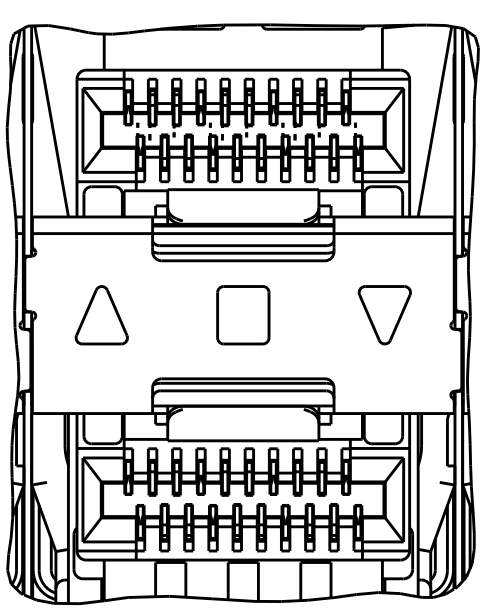

CENTER/REVERSED OUTER
1-2347721-7, 1-2347721-9
SCALE 4:1

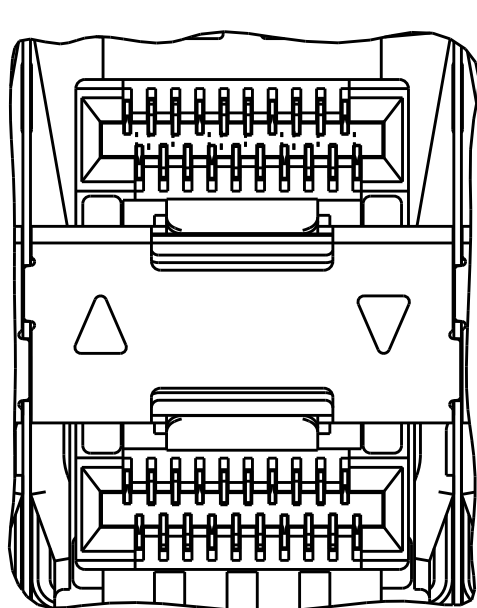


REVERSED OUTER
1-2347721-8, 2-2347721-0
SCALE 4:1

88	EMI SPRING AIRFLOW ENHANCE TYPE	NONE	3-2347721-1
90.75	EMI GASKET AIRFLOW ENHANCE TYPE	NONE	3-2347721-0
88	EMI SPRINGS	REVERSED INNER	2-2347721-1
		REVERSED OUTER	2-2347721-0
		CENTER/REVERSED OUTER	1-2347721-9
90.75	EMI GASKET	REVERSED OUTER	1-2347721-8
		CENTER/REVERSED OUTER	1-2347721-7
88	EMI SPRINGS WITH NICKEL PLATING ONLY	REVERSED INNER	1-2347721-3
		OUTER	1-2347721-2
		INNER	1-2347721-1
		INNER/OUTER	1-2347721-0
88	EMI SPRINGS	NONE	2347721-9
		OUTER	2347721-8
		INNER	2347721-7
		INNER/OUTER	2347721-6
90.75	EMI GASKET	NONE	2347721-5
		OUTER	2347721-4
		INNER	2347721-3
		INNER/OUTER	2347721-2
		NONE	2347721-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	 TE Connectivity		
DIMENSIONS:		CHK S. HAN 26FEB2019			
mm		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56		
		PRODUCT SPEC 108-2481		SIZE A1	
		APPLICATION SPEC 114-13319			
MATERIAL SEE NOTES		FINISH SEE NOTES	CAGE CODE 00779	DRAWING NO 2347721	
		WEIGHT -			
		CUSTOMER DRAWING		SCALE 4:1	
		SHEET 1 OF 6		REV A	

LOC		DIST		REVISIONS				
GP		00		P	LTR	DESCRIPTION		DATE
				-		SEE SHEET 1		-
								-
								-
								-


AIRFOLW ENHANCE TYPE

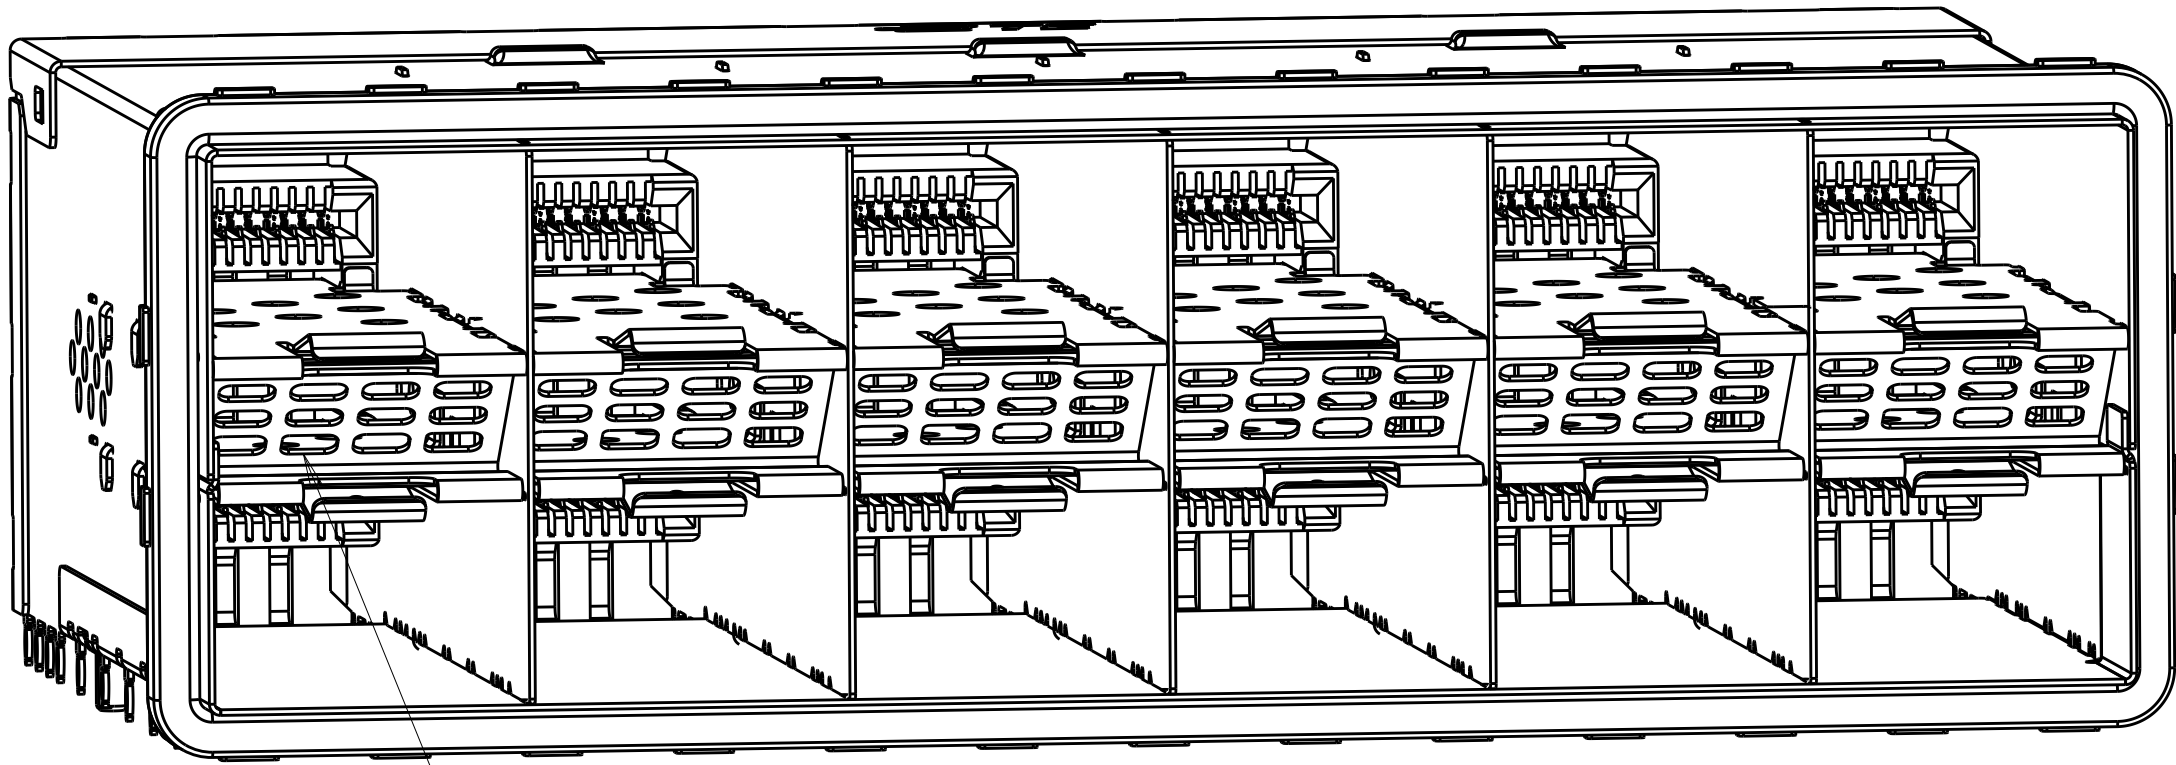

AIR VENTS

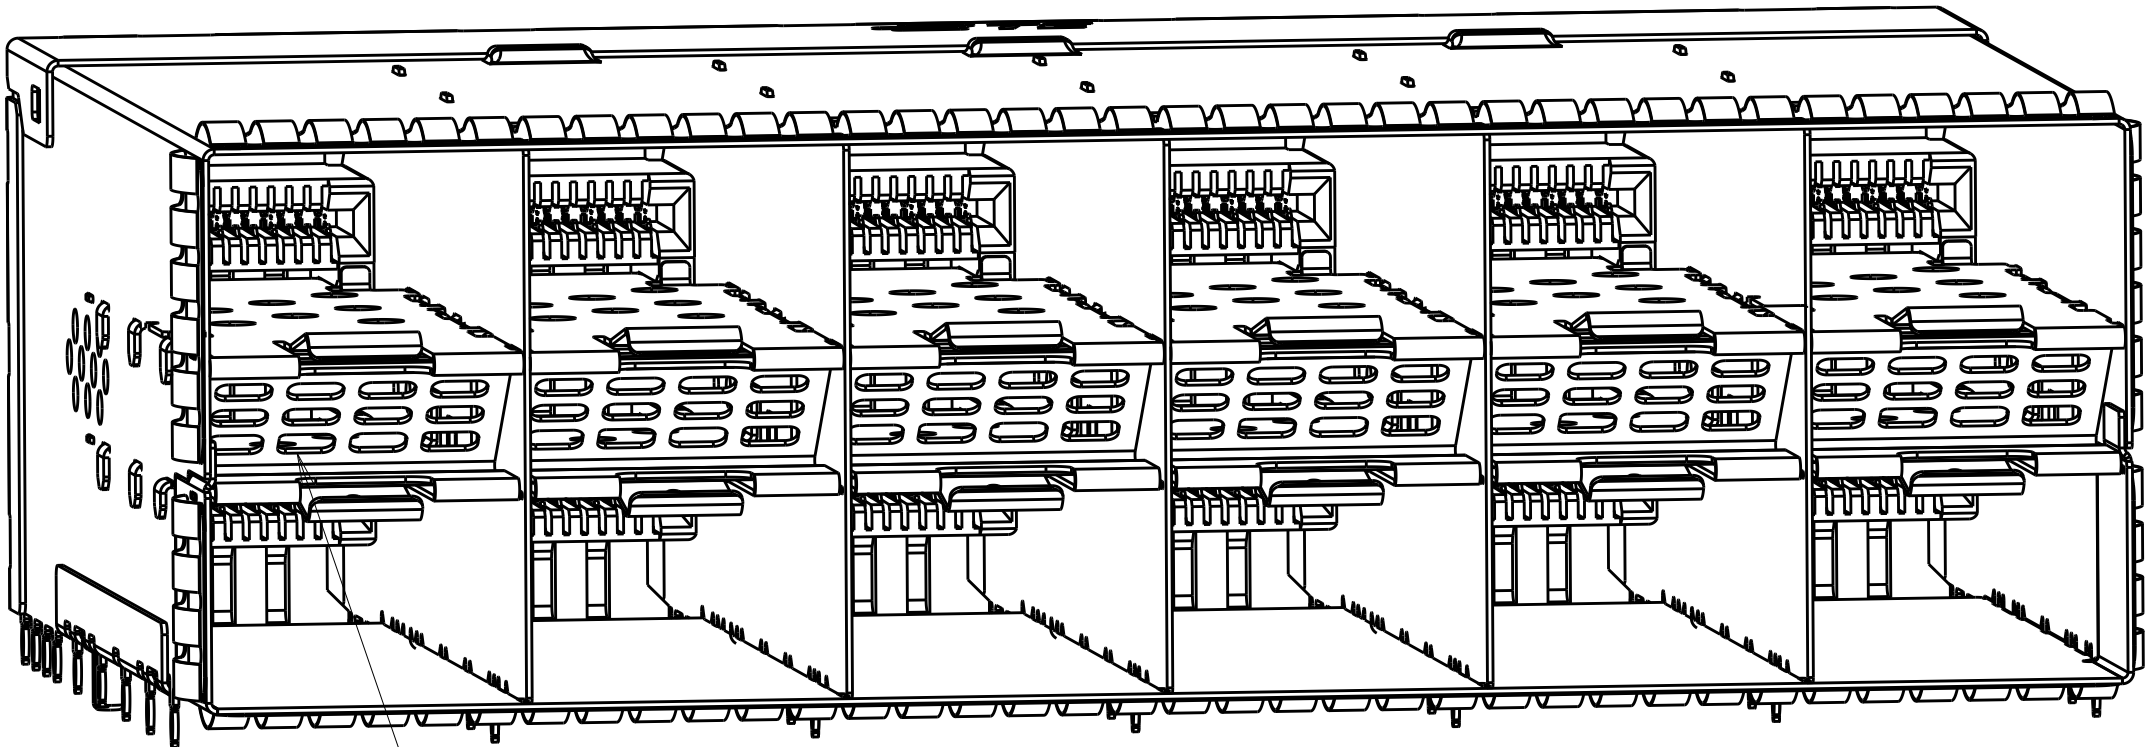


AIR VENTS

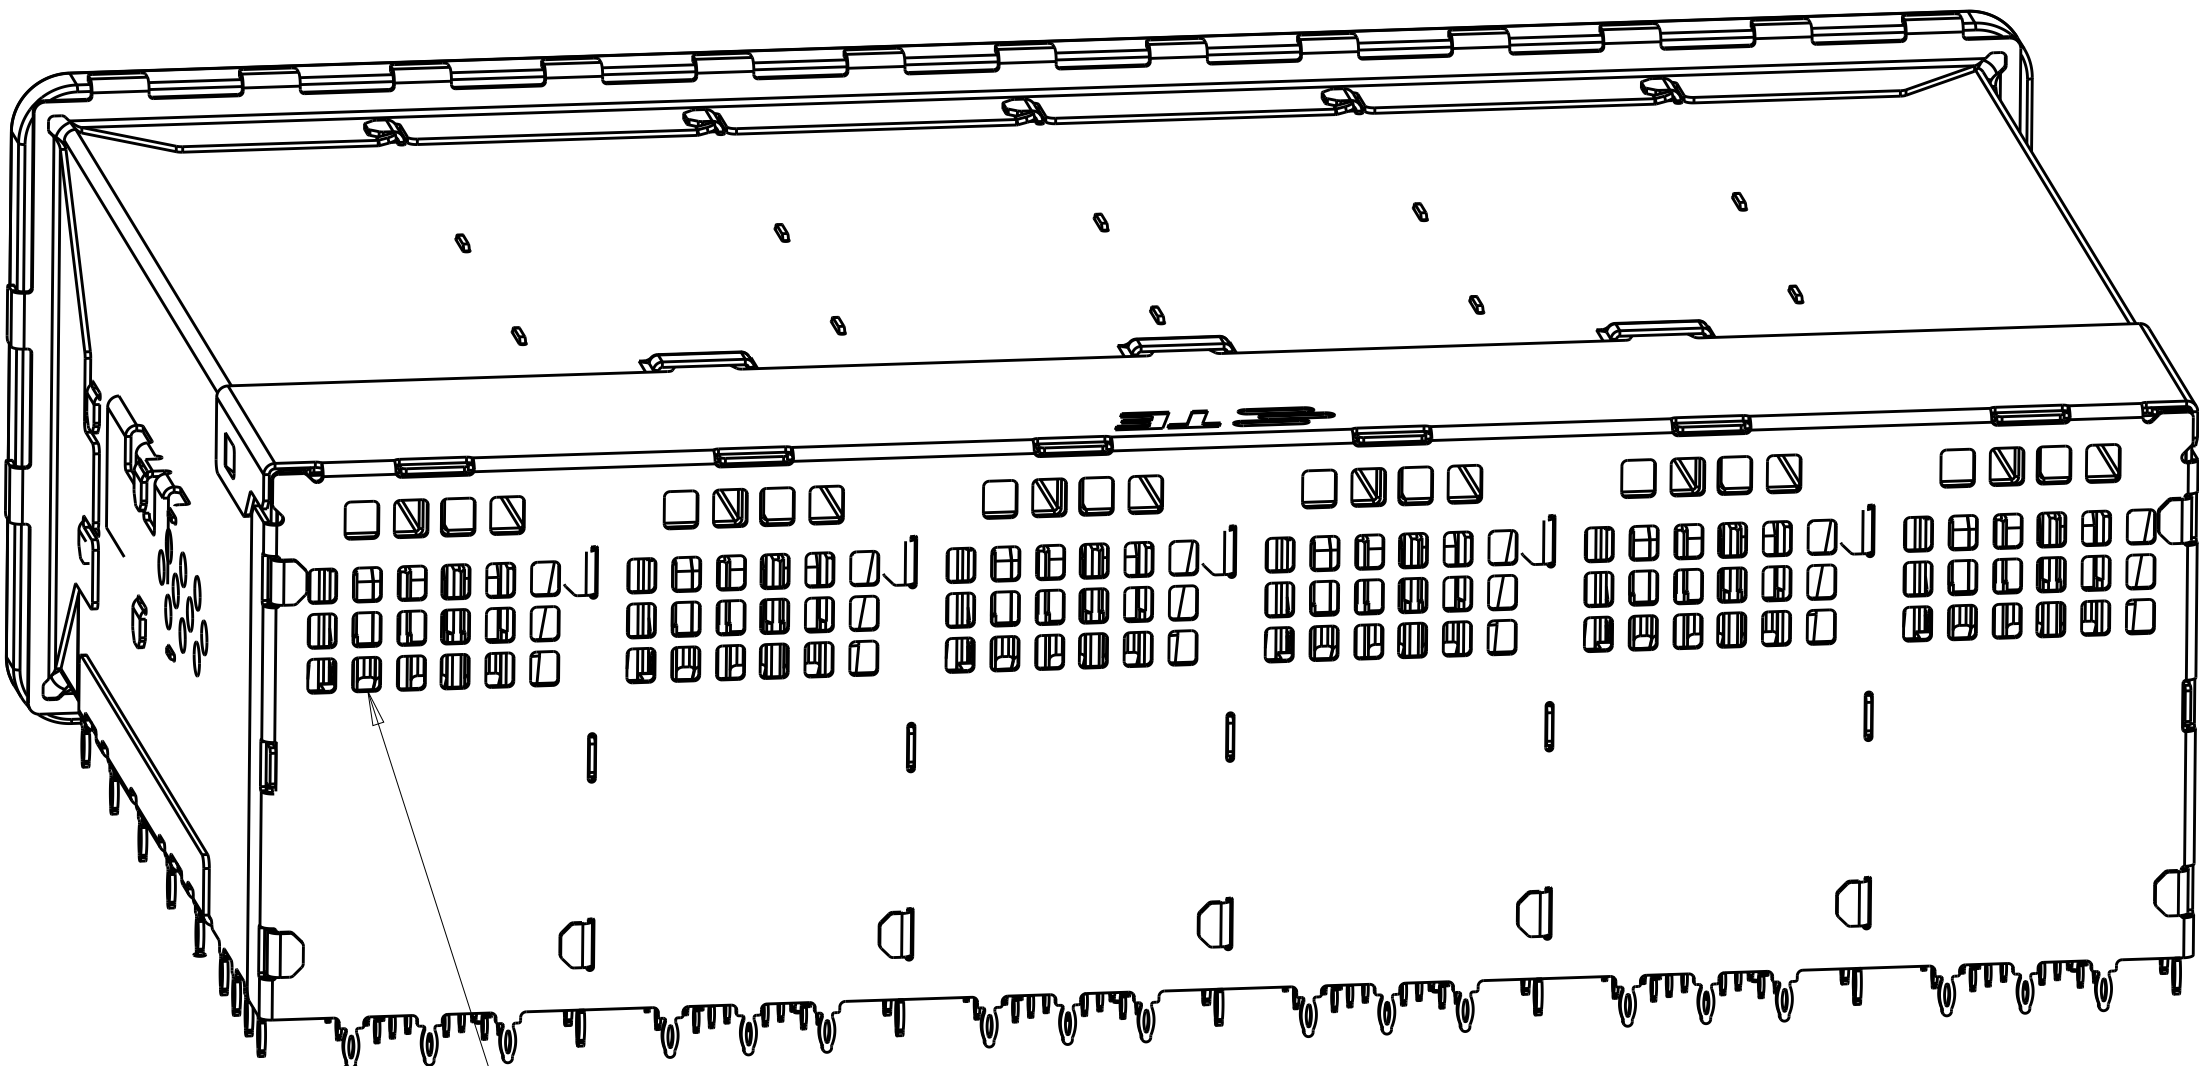

AIR VENTS

3-2347721-0
EMI GASKET TYPE


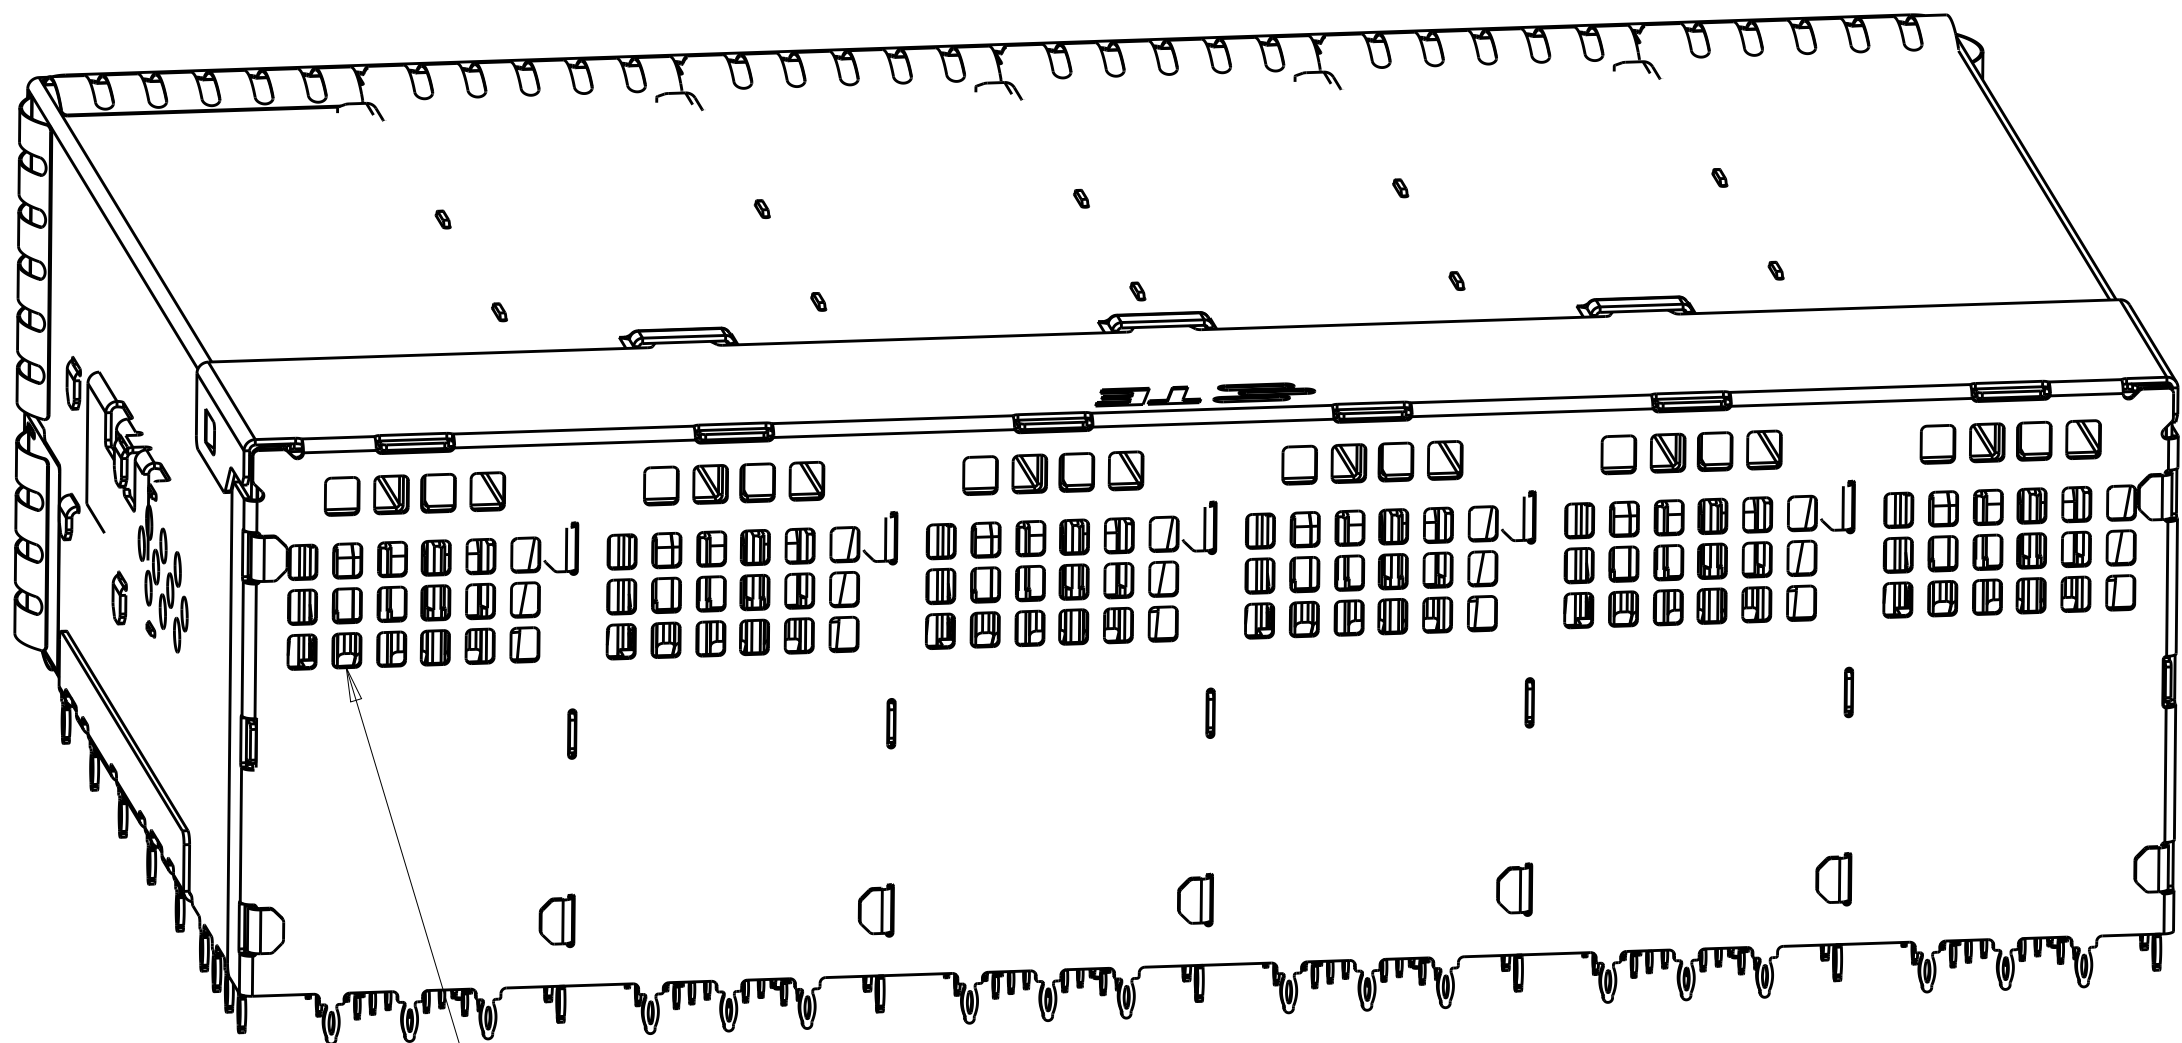


AIR VENTS



3-2347721-1
EMI SPRING TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN J. WANG 26FEB2019		TE TE Connectivity RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK S. HAN 26FEB2019			
mm		0 PLC ±0.25		APVD S. HAN 26FEB2019			
		1 PLC ±0.25		PRODUCT SPEC			
		2 PLC ±0.25		108-2481		NAME	
		3 PLC ±0.25		APPLICATION SPEC		SIZE	
		4 PLC ±0.25		114-13319		CAGE CODE	
		ANGLES ±°		WEIGHT		DRAWING NO	
		FINISH		CUSTOMER DRAWING		RESTRICTED TO	
MATERIAL		SEE NOTES		A100779		C=2347721	
SCALE		1:1		SHEET		2 OF 6	
						REV A	

LOC		DIST		REVISIONS			
GP		00		P	LTR	DESCRIPTION	DATE
						SEE SHEET 1	



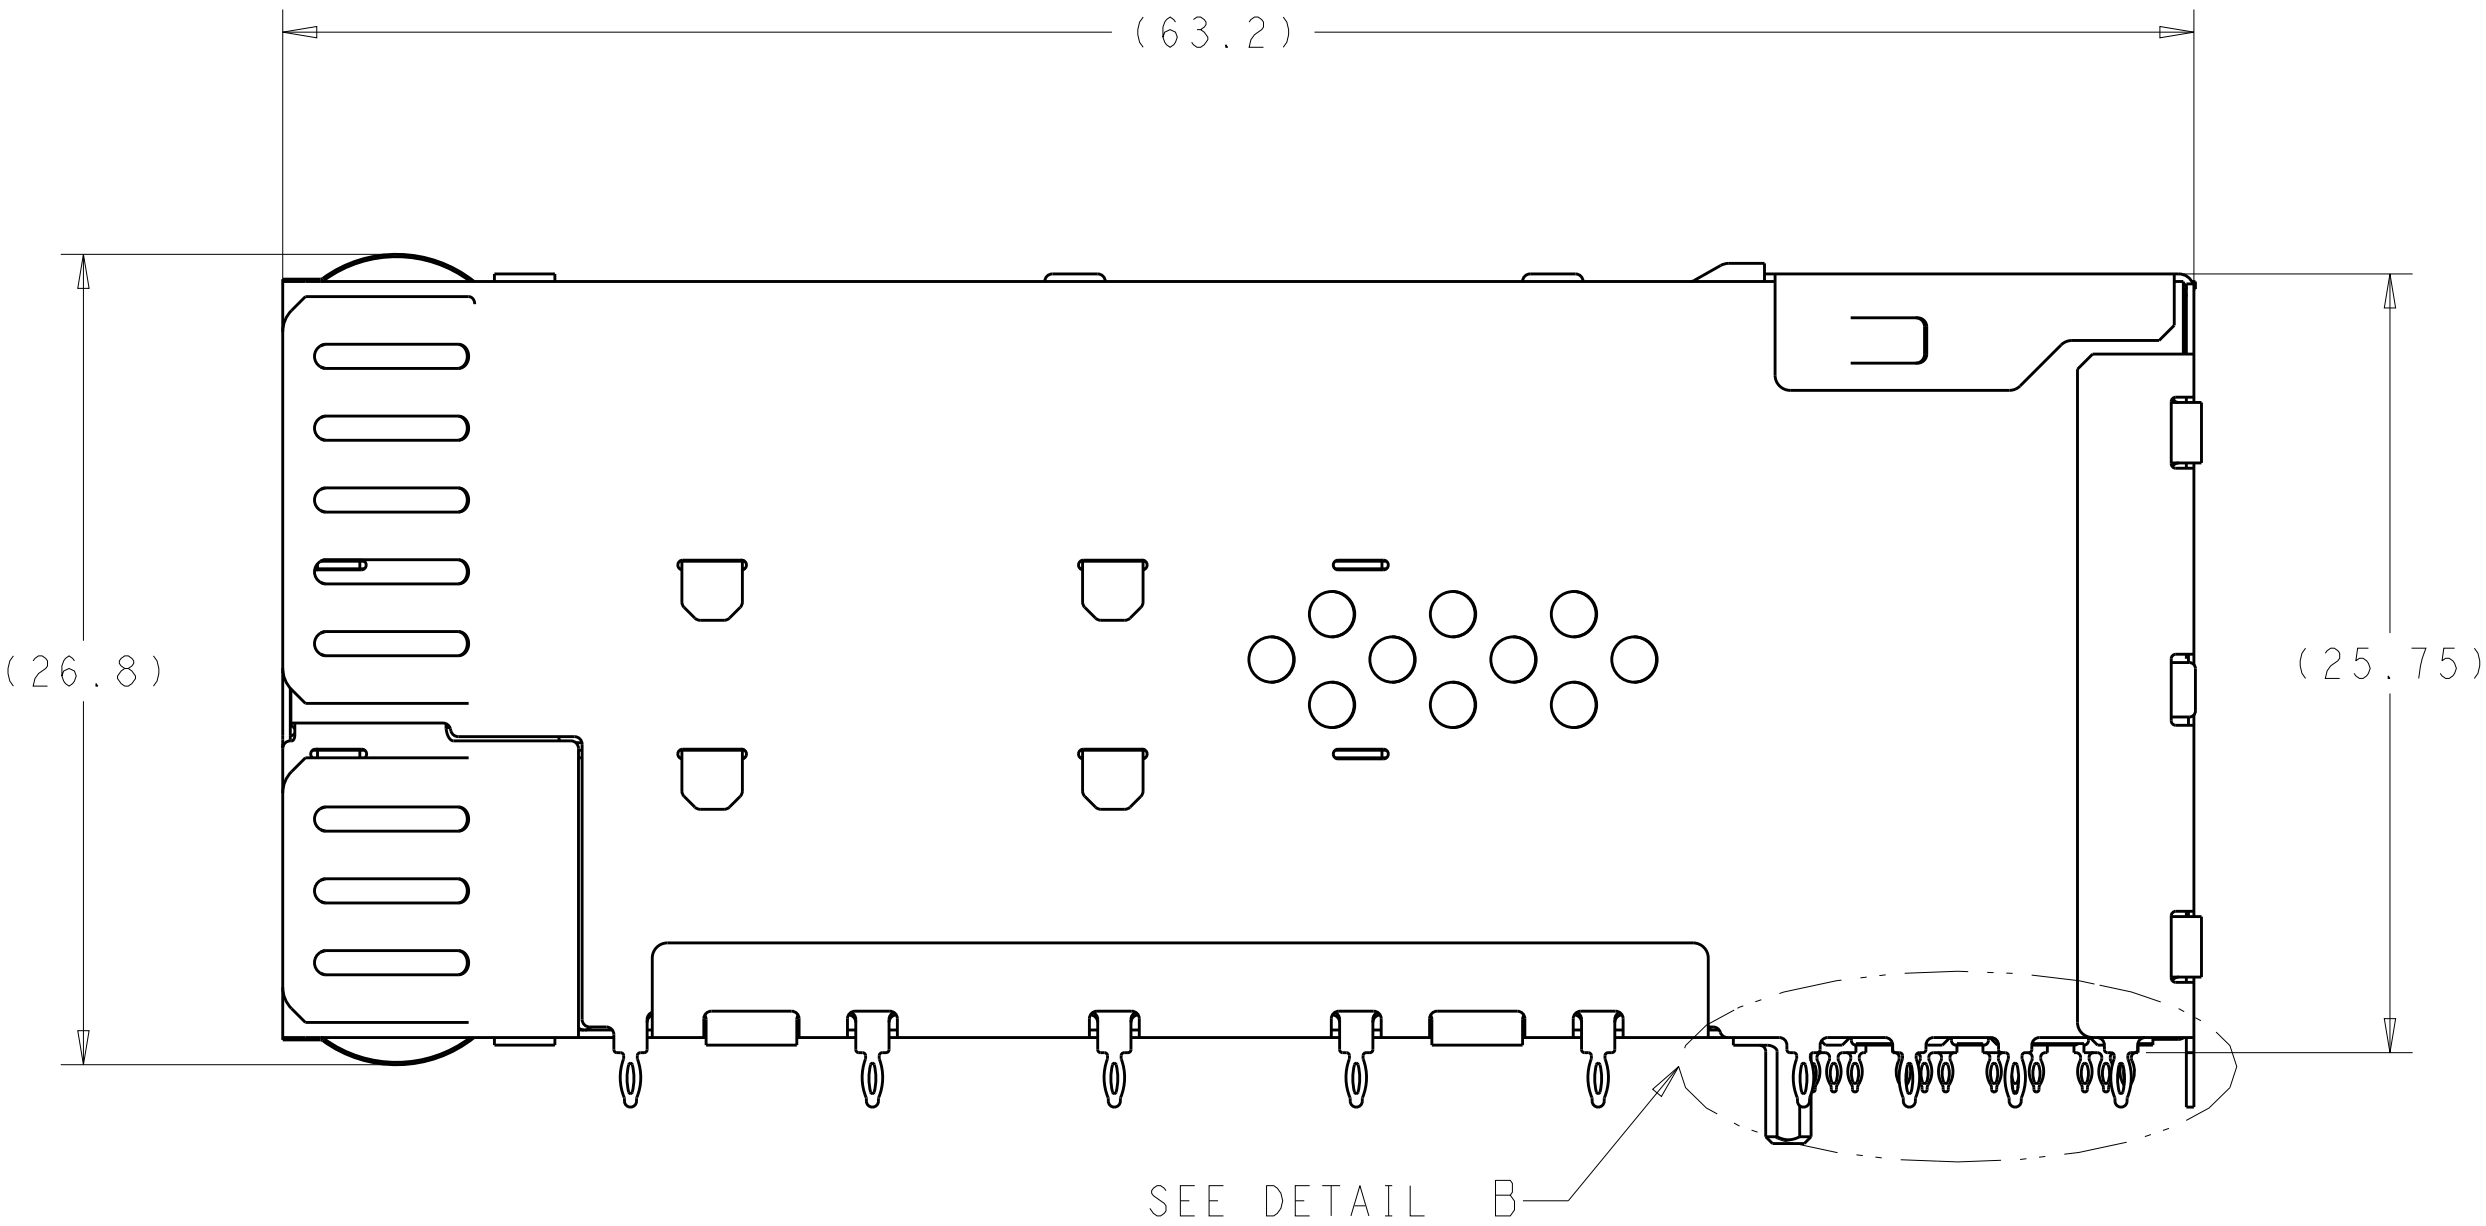
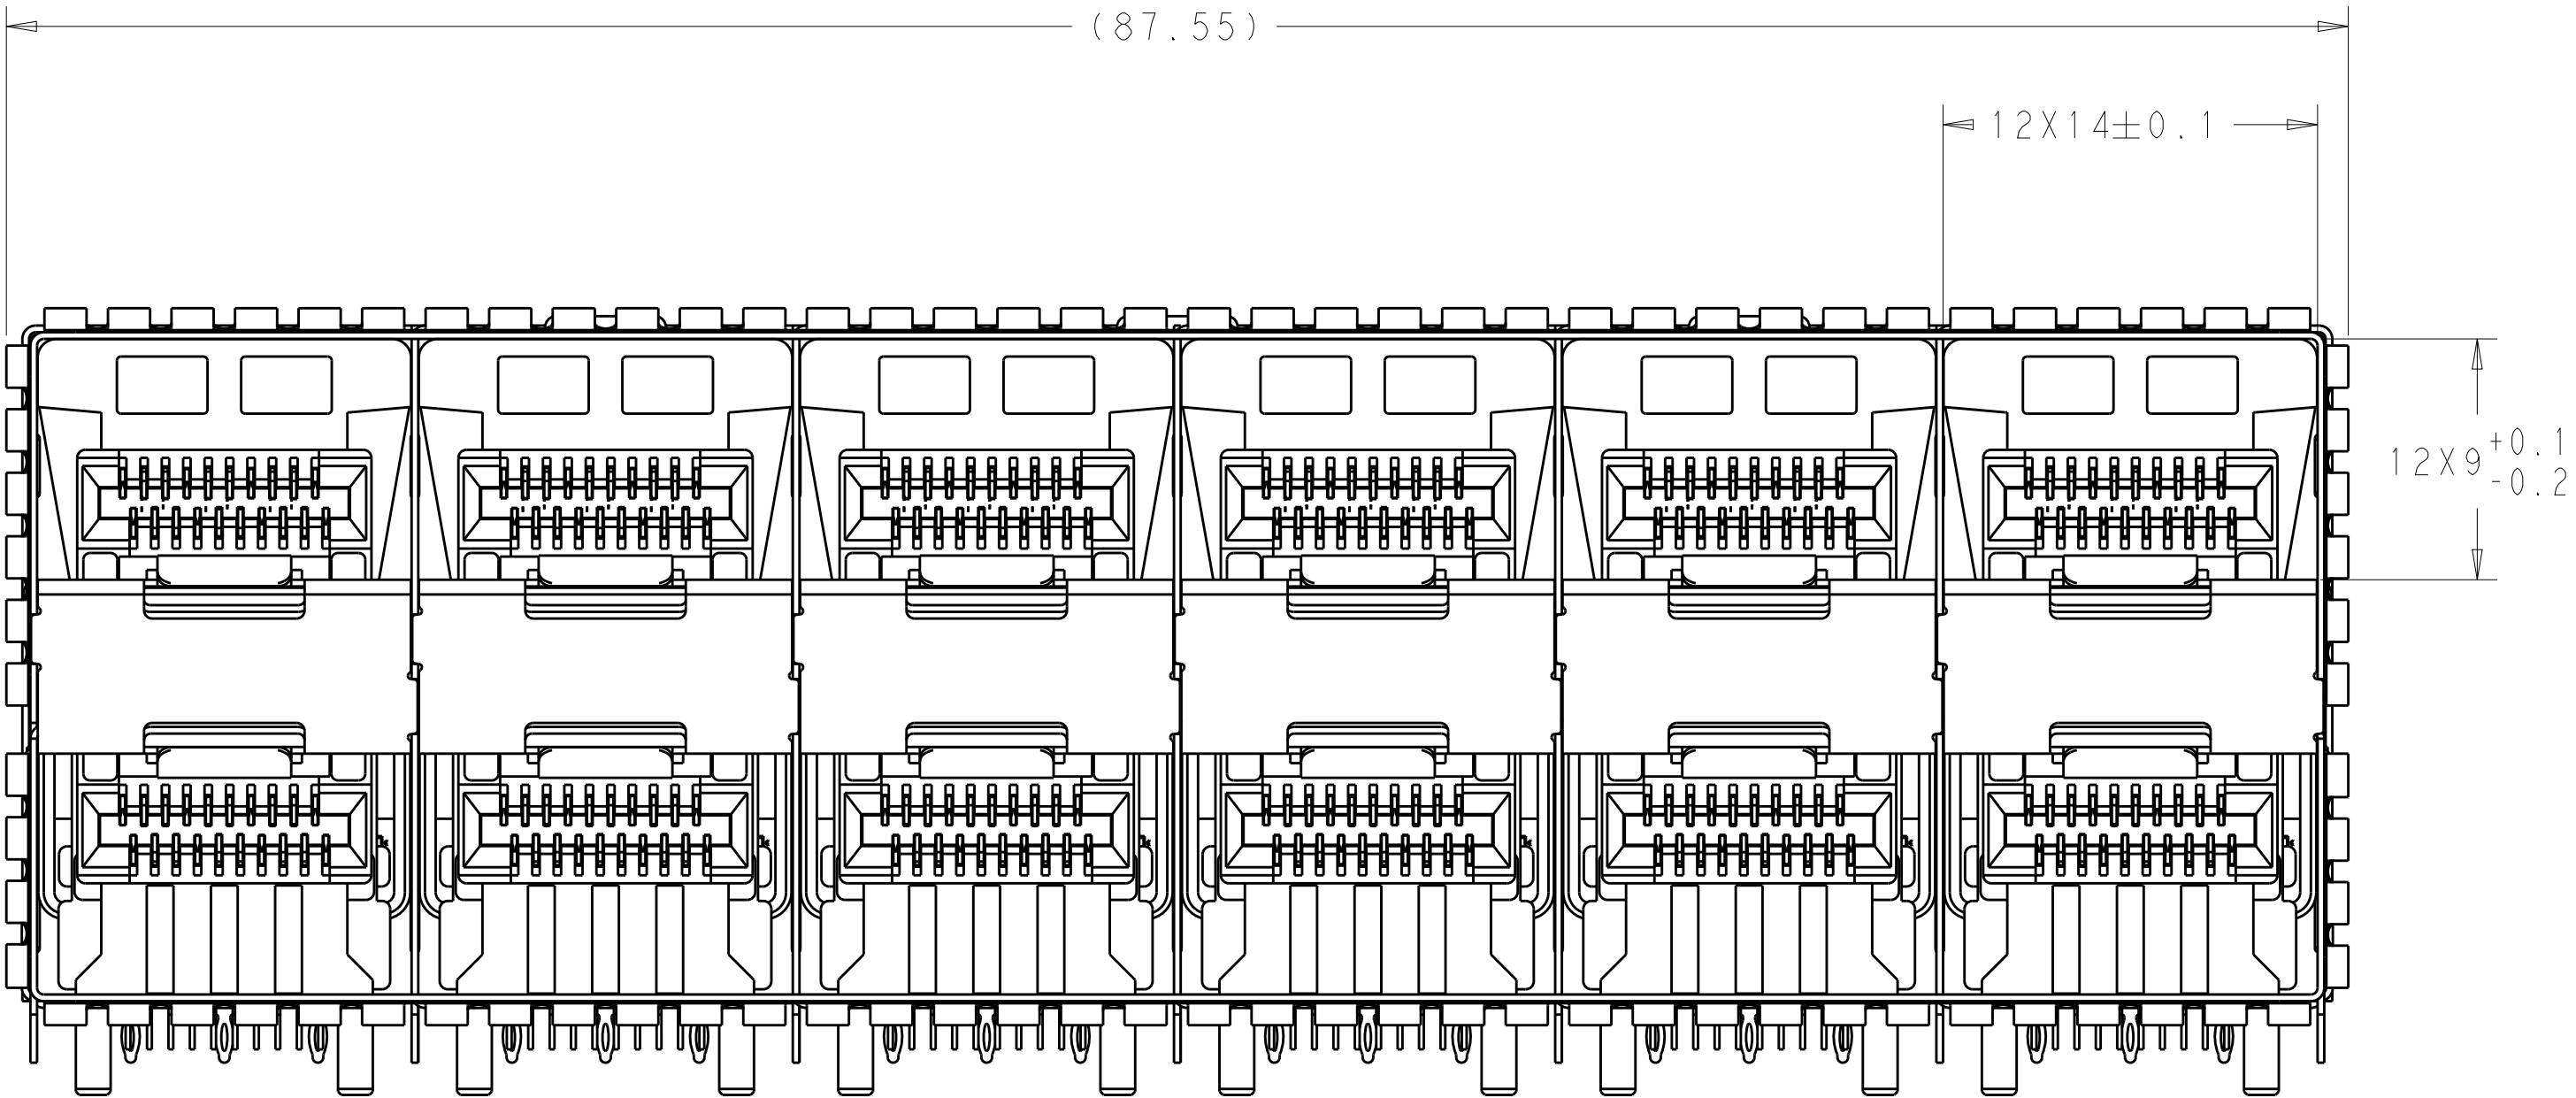


2347721-5 THRU 1-2347721-2, 1-2347721-9, 2-2347721-0,2-2347721-1
EMI SPRINGS ONLY
SCALE 4:1

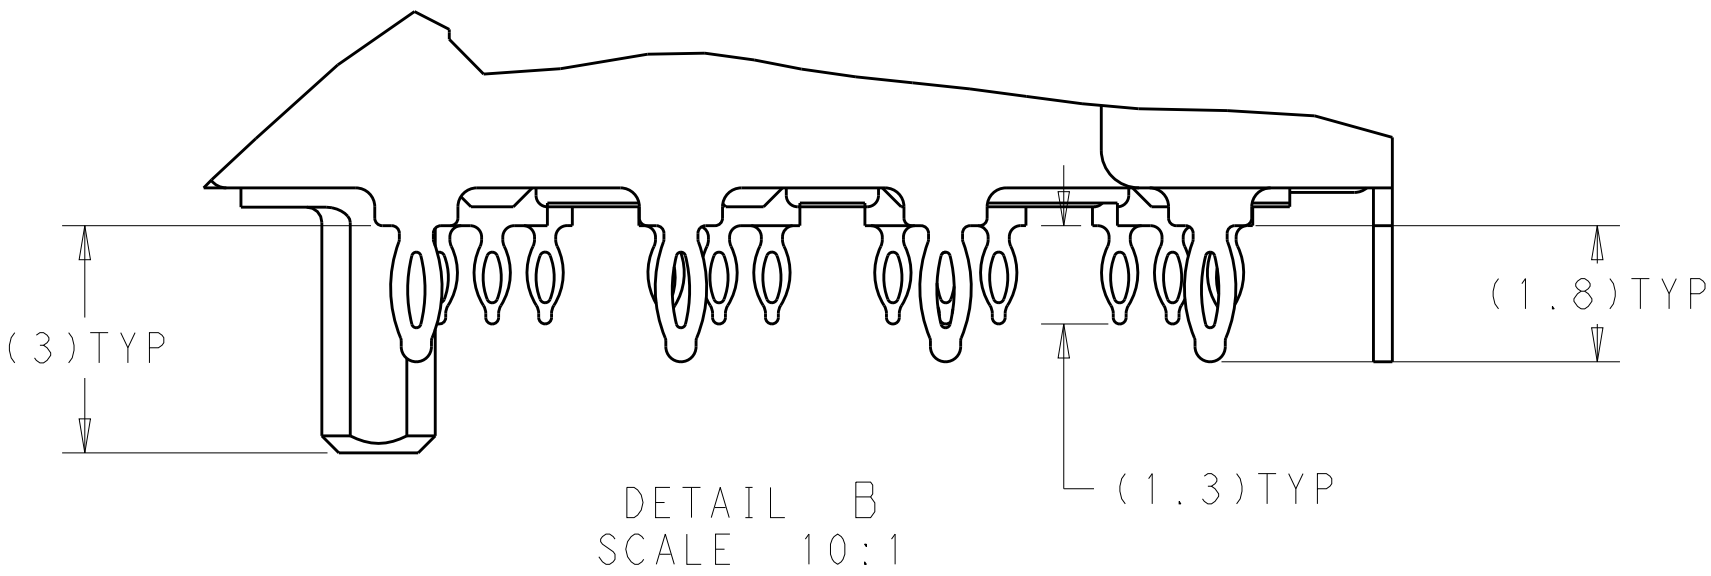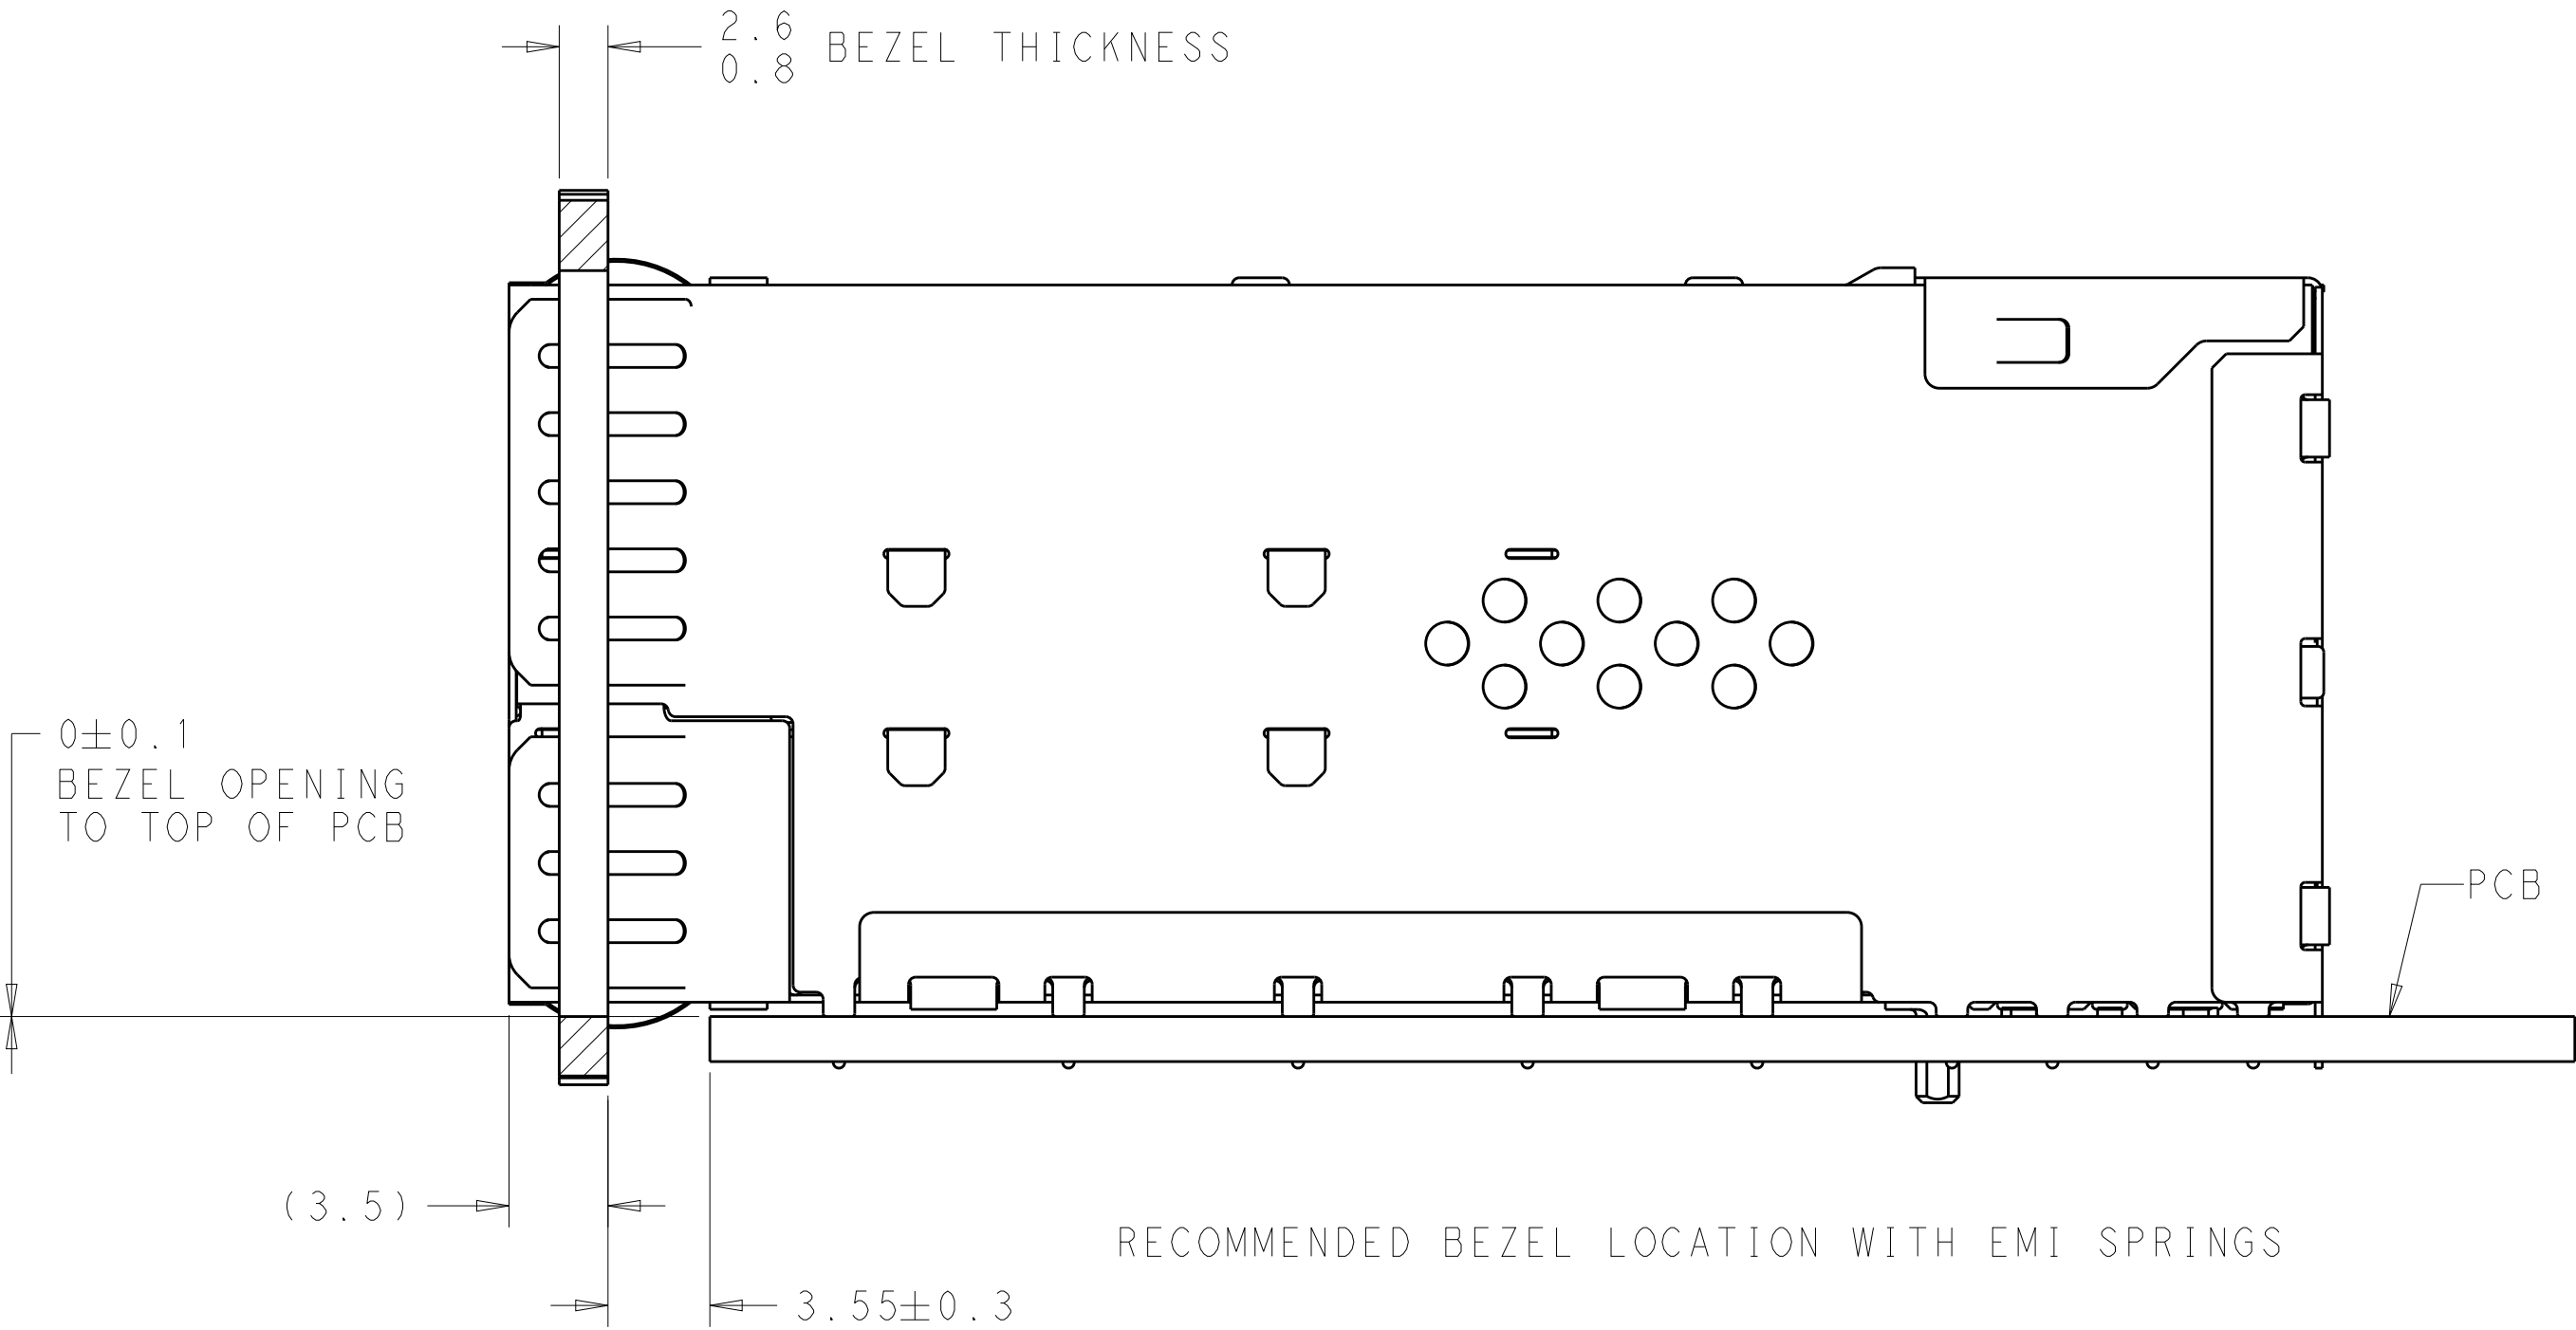


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. WANG	26FEB2019	 TE Connectivity		
		CHK	S. HAN	26FEB2019			
		APVD	S. HAN	26FEB2019	NAME		
		PRODUCT SPEC			RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56		
		APPLICATION SPEC			-		
		WEIGHT			A100779C=2347721		
		CUSTOMER DRAWING			SCALE 1:1 SHEET 3 OF 6 REV A		

LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

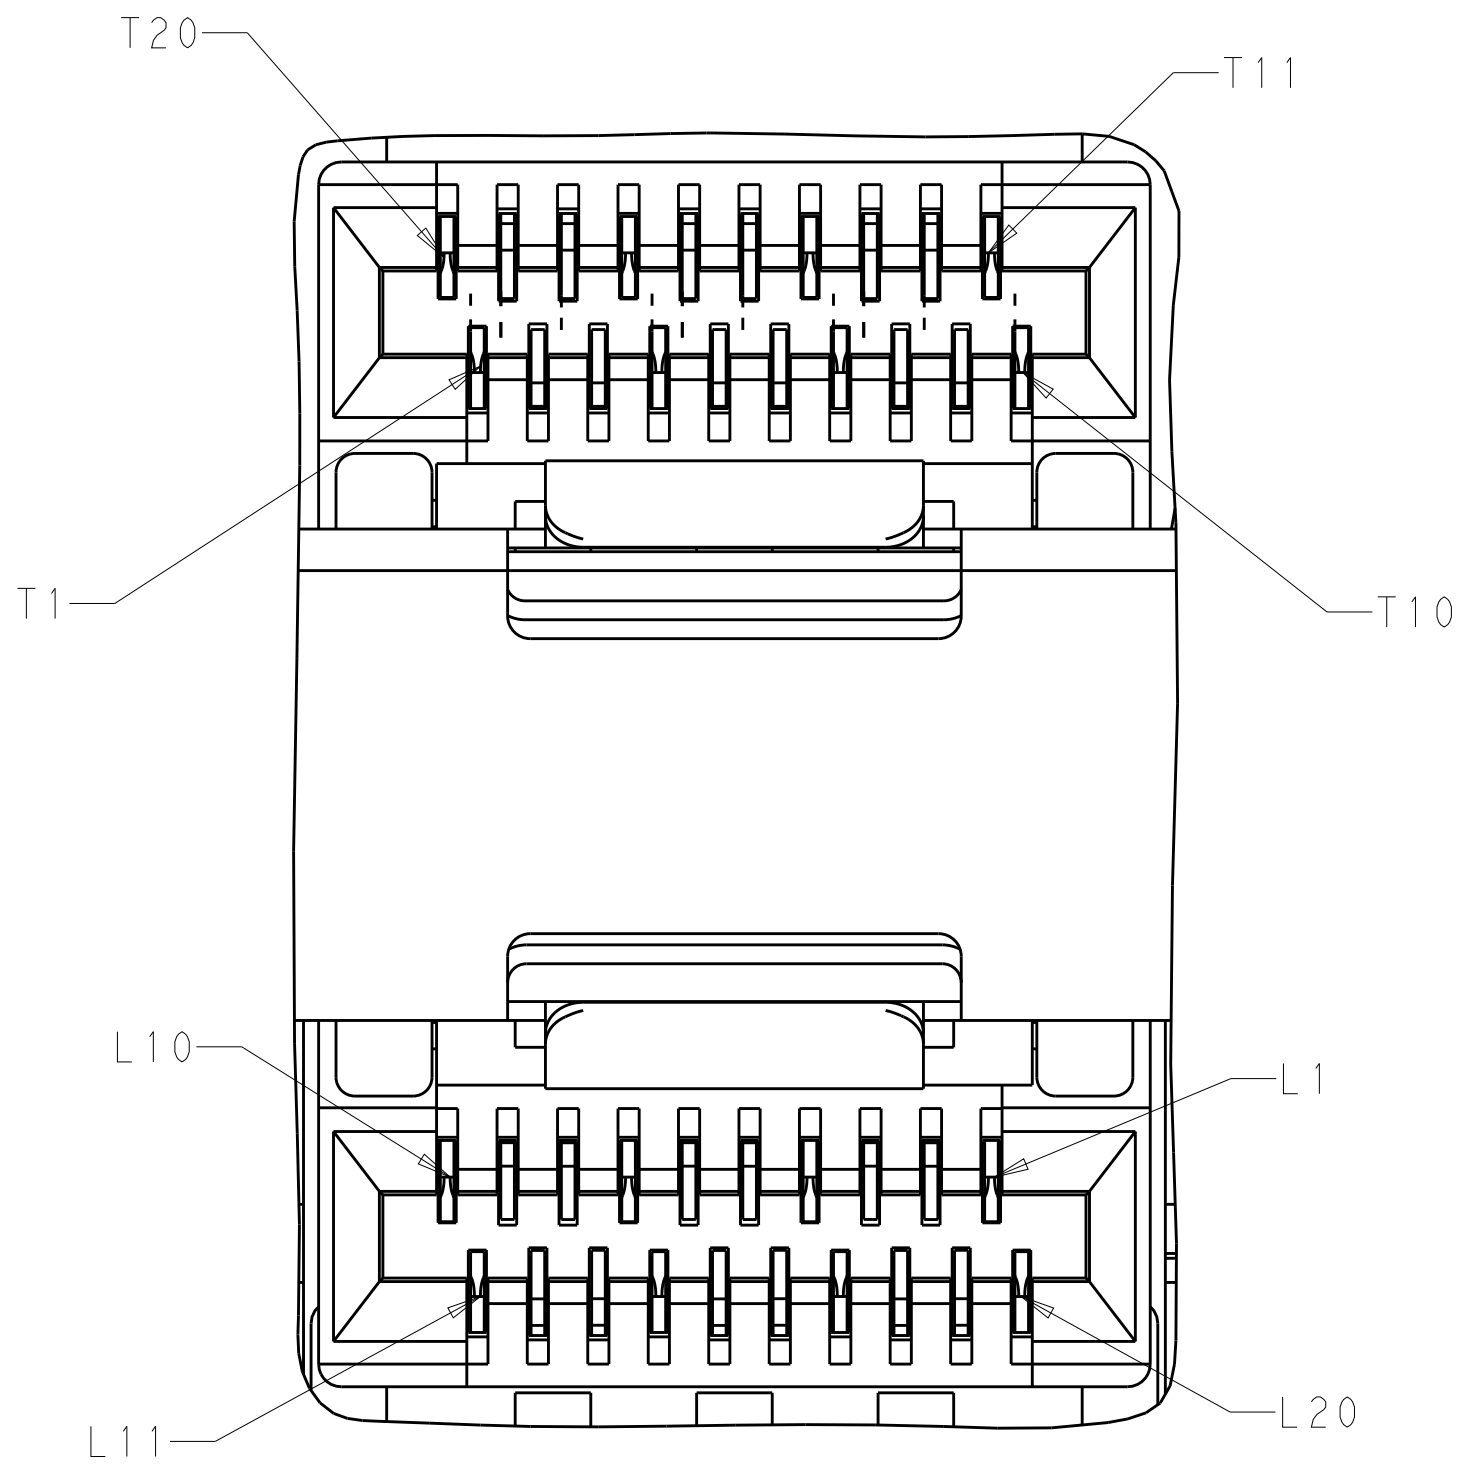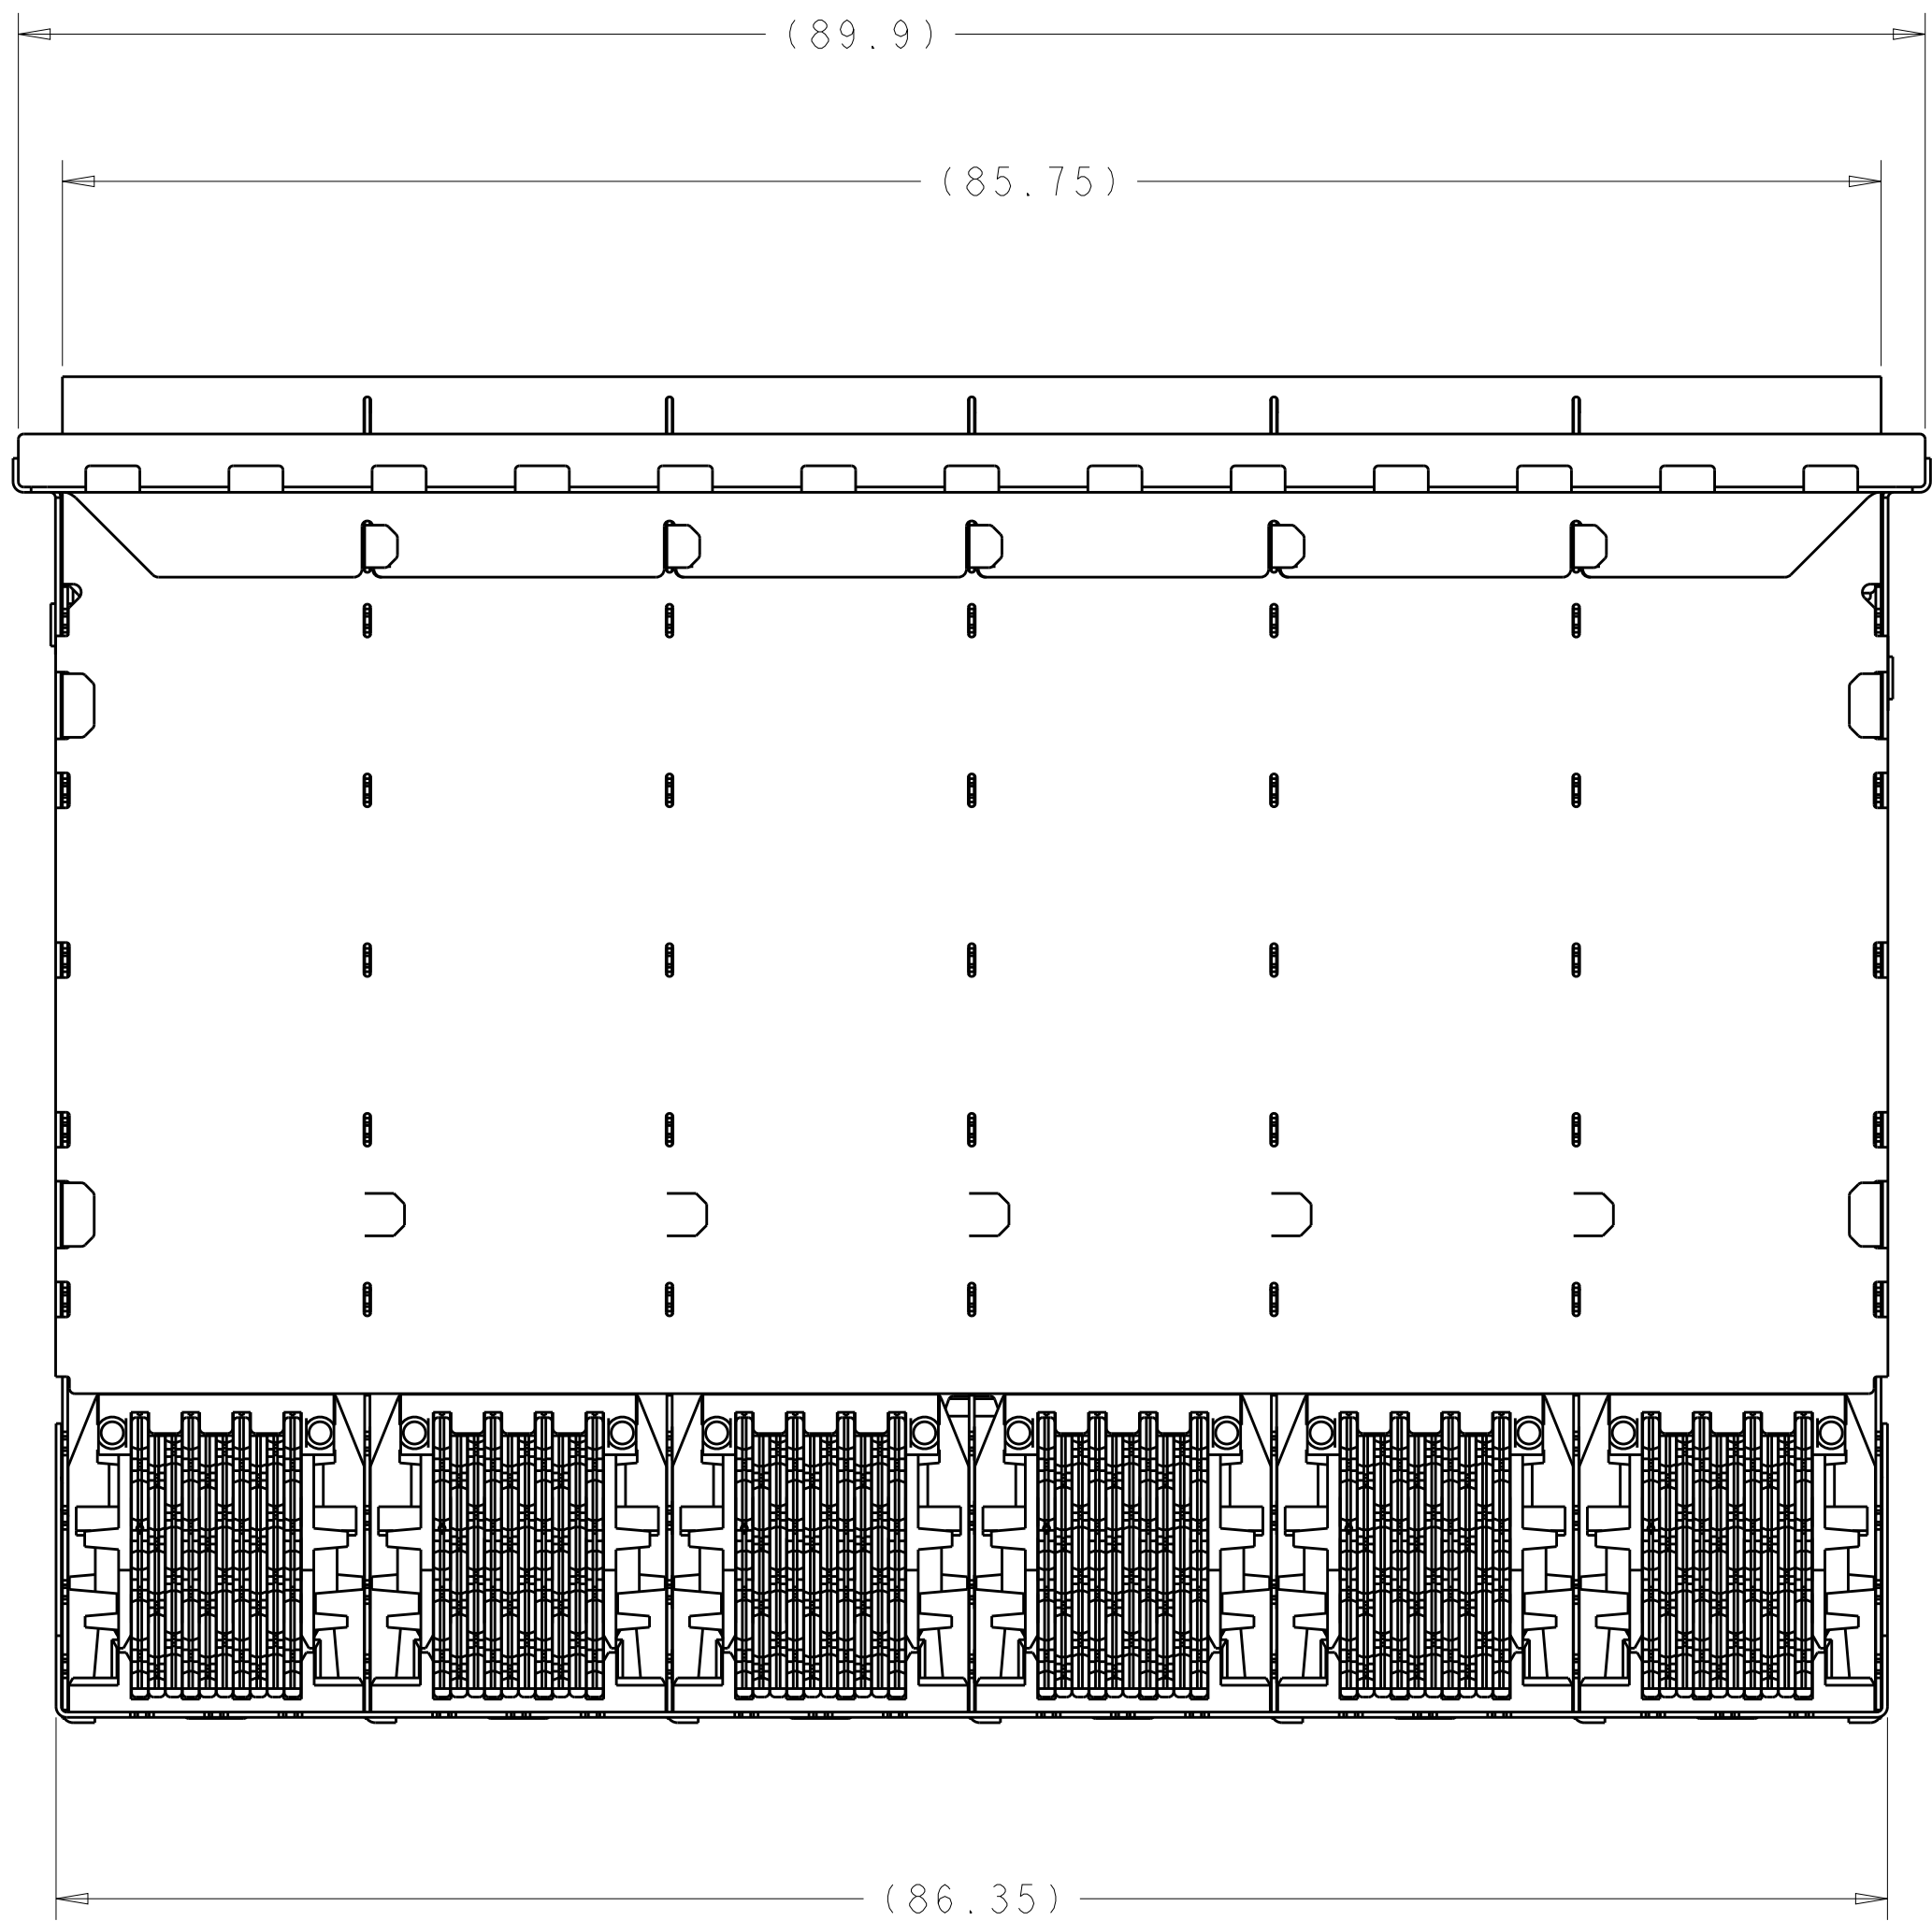
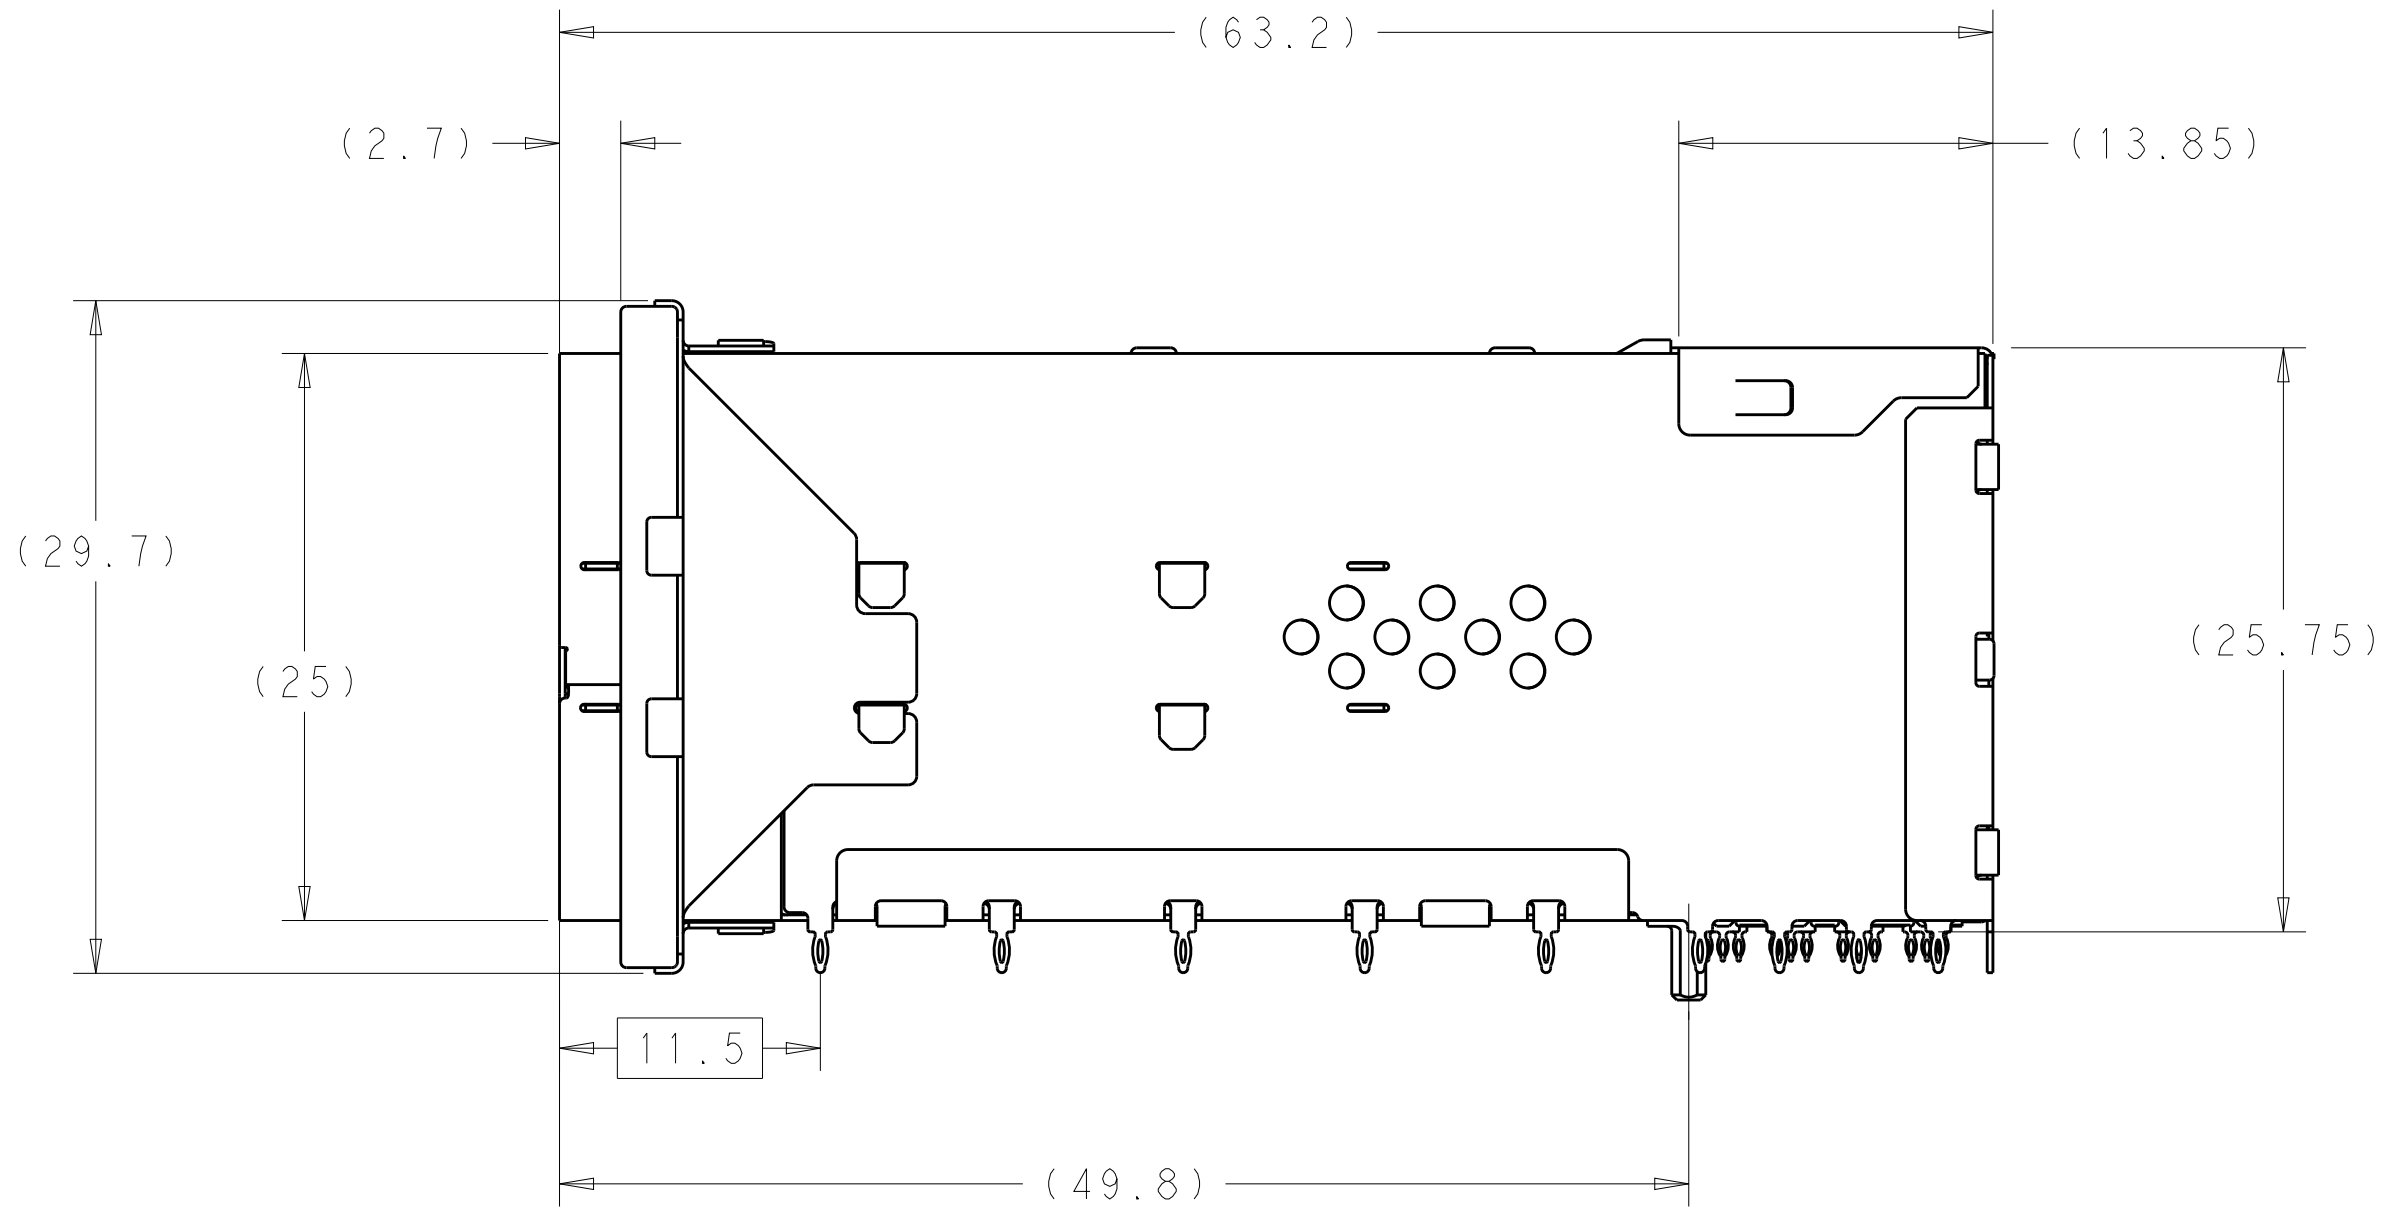
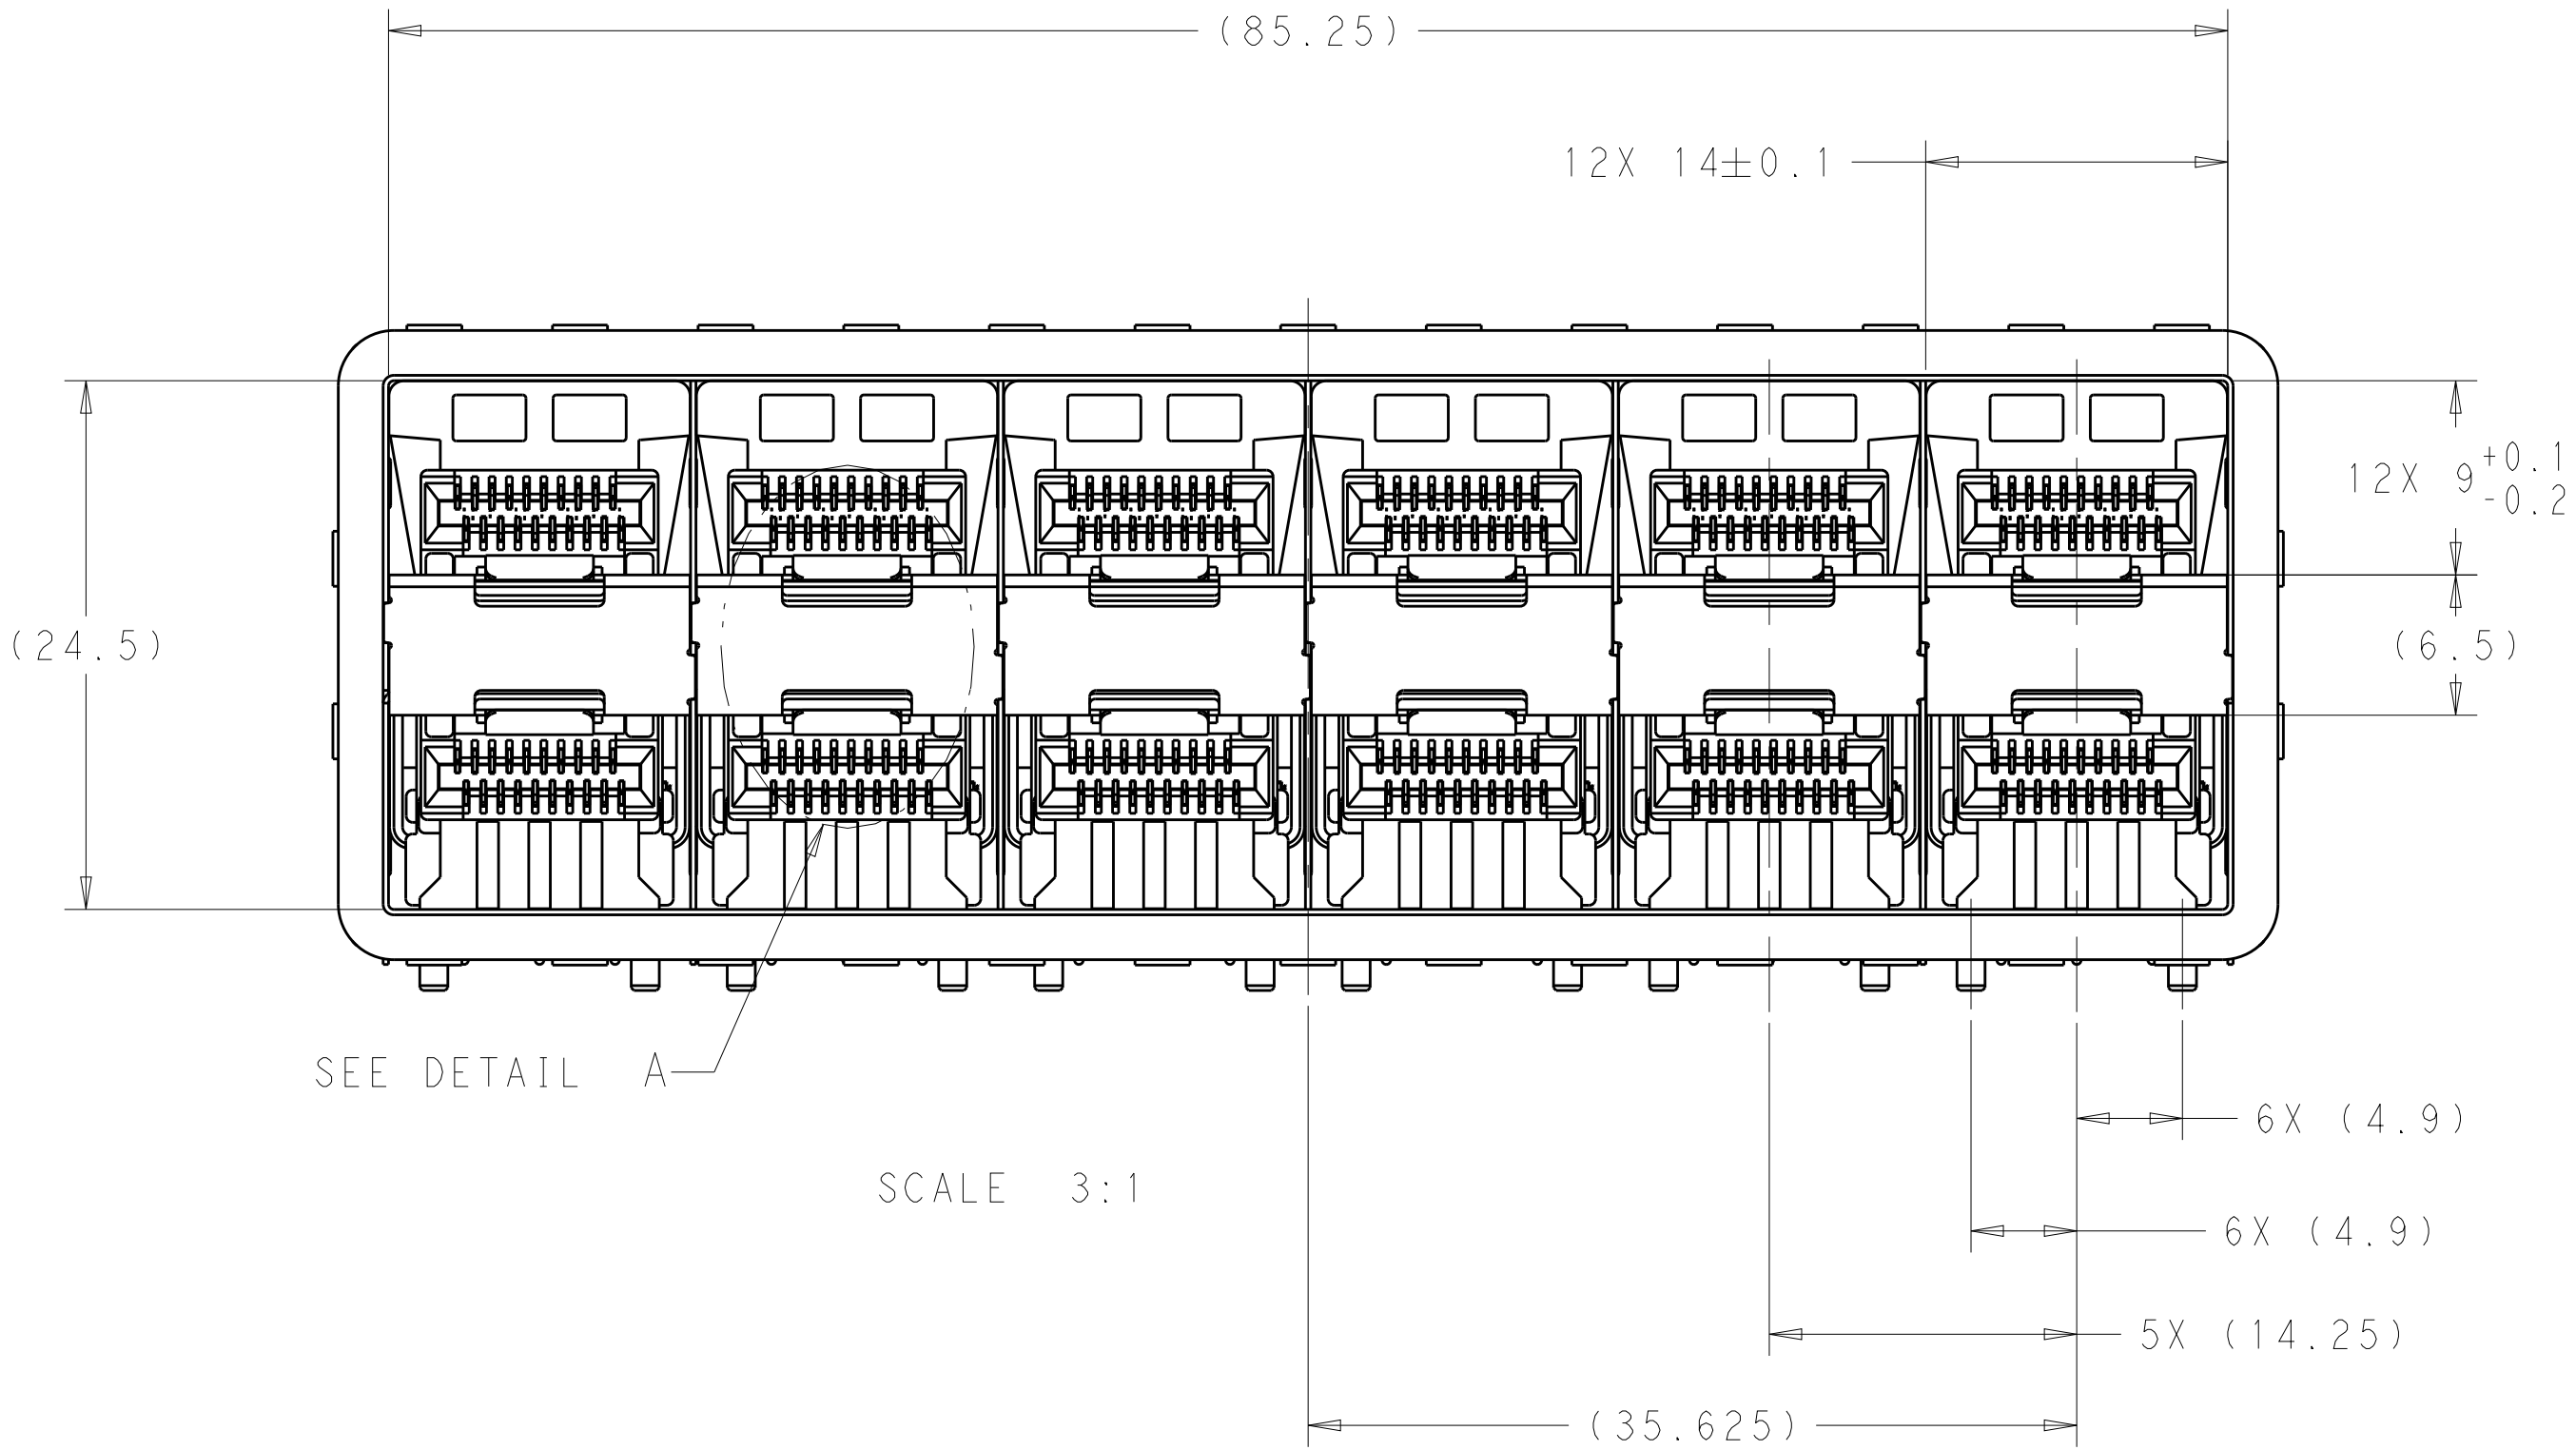


DETAIL A
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	J. WANG	26FEB2019	 TE Connectivity	
				CHK	S. HAN	26FEB2019		
				APVD	S. HAN	26FEB2019	NAME	
				PRODUCT SPEC			RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
				APPLICATION SPEC			-	
				114-13319			SIZE	
				WEIGHT			CAGE CODE	
				CUSTOMER DRAWING			DRAWING NO	
							RESTRICTED TO	

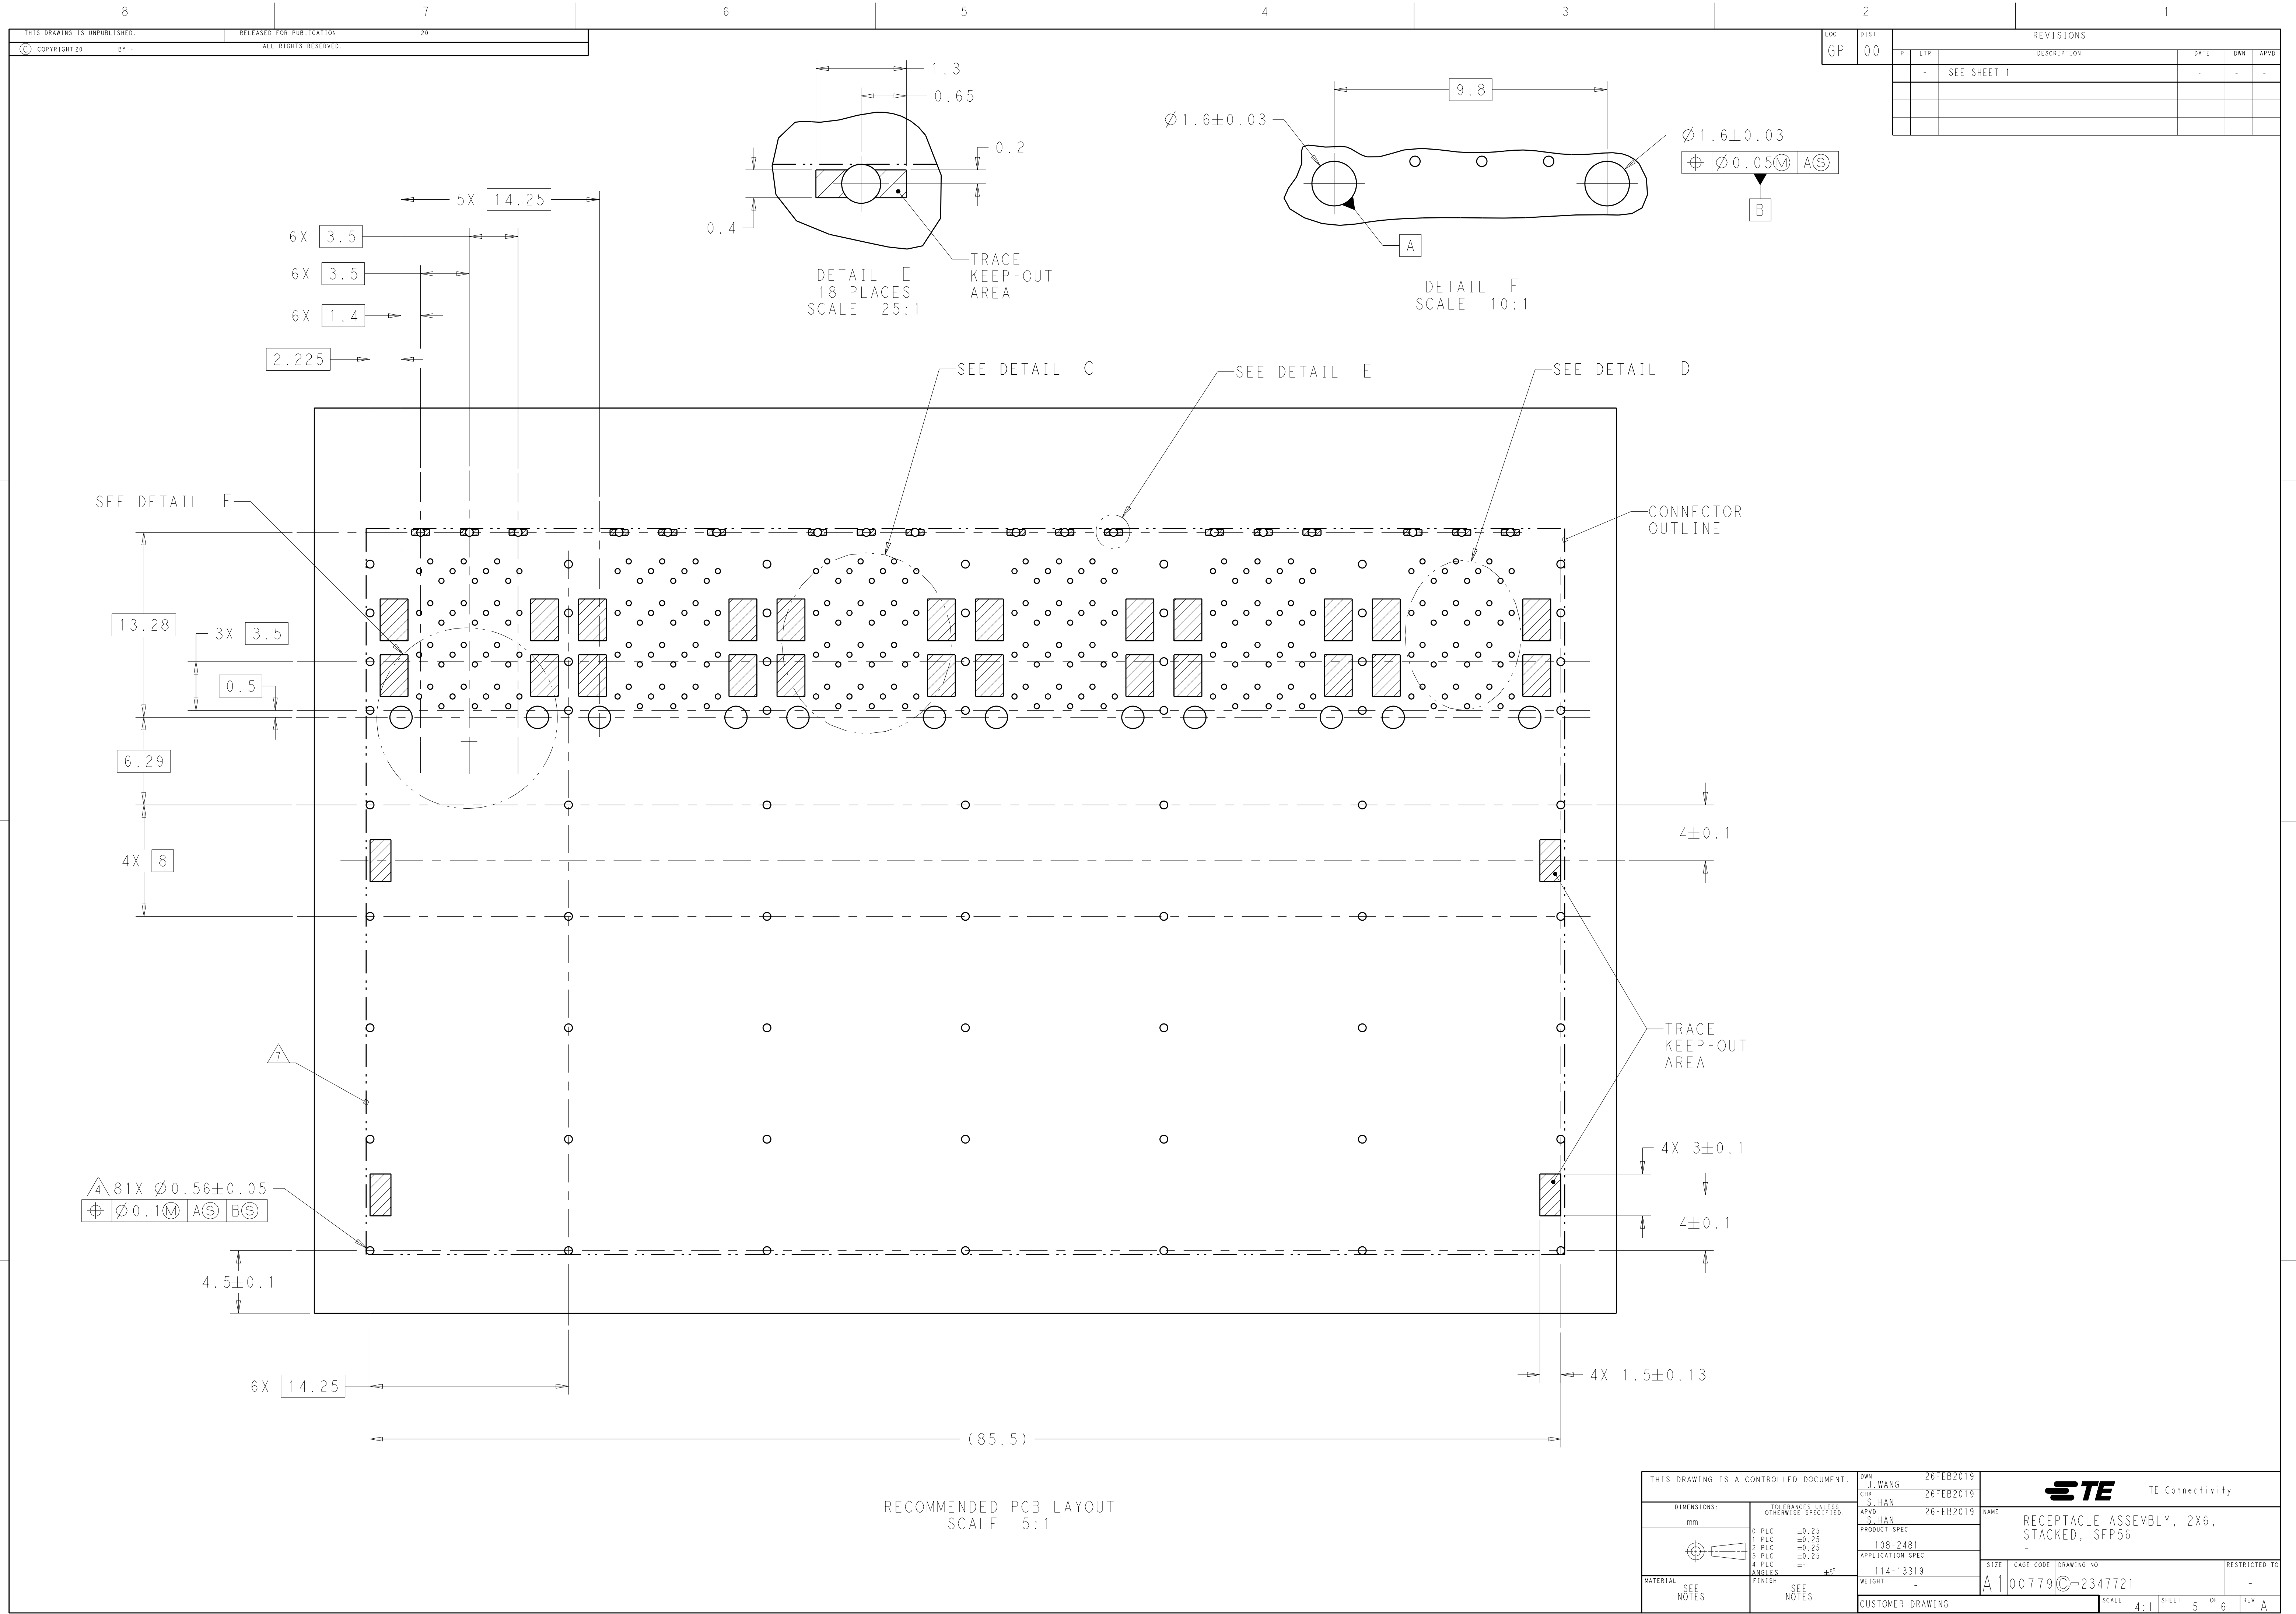


LOC		DIST		REVISIONS					
GP			00	P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

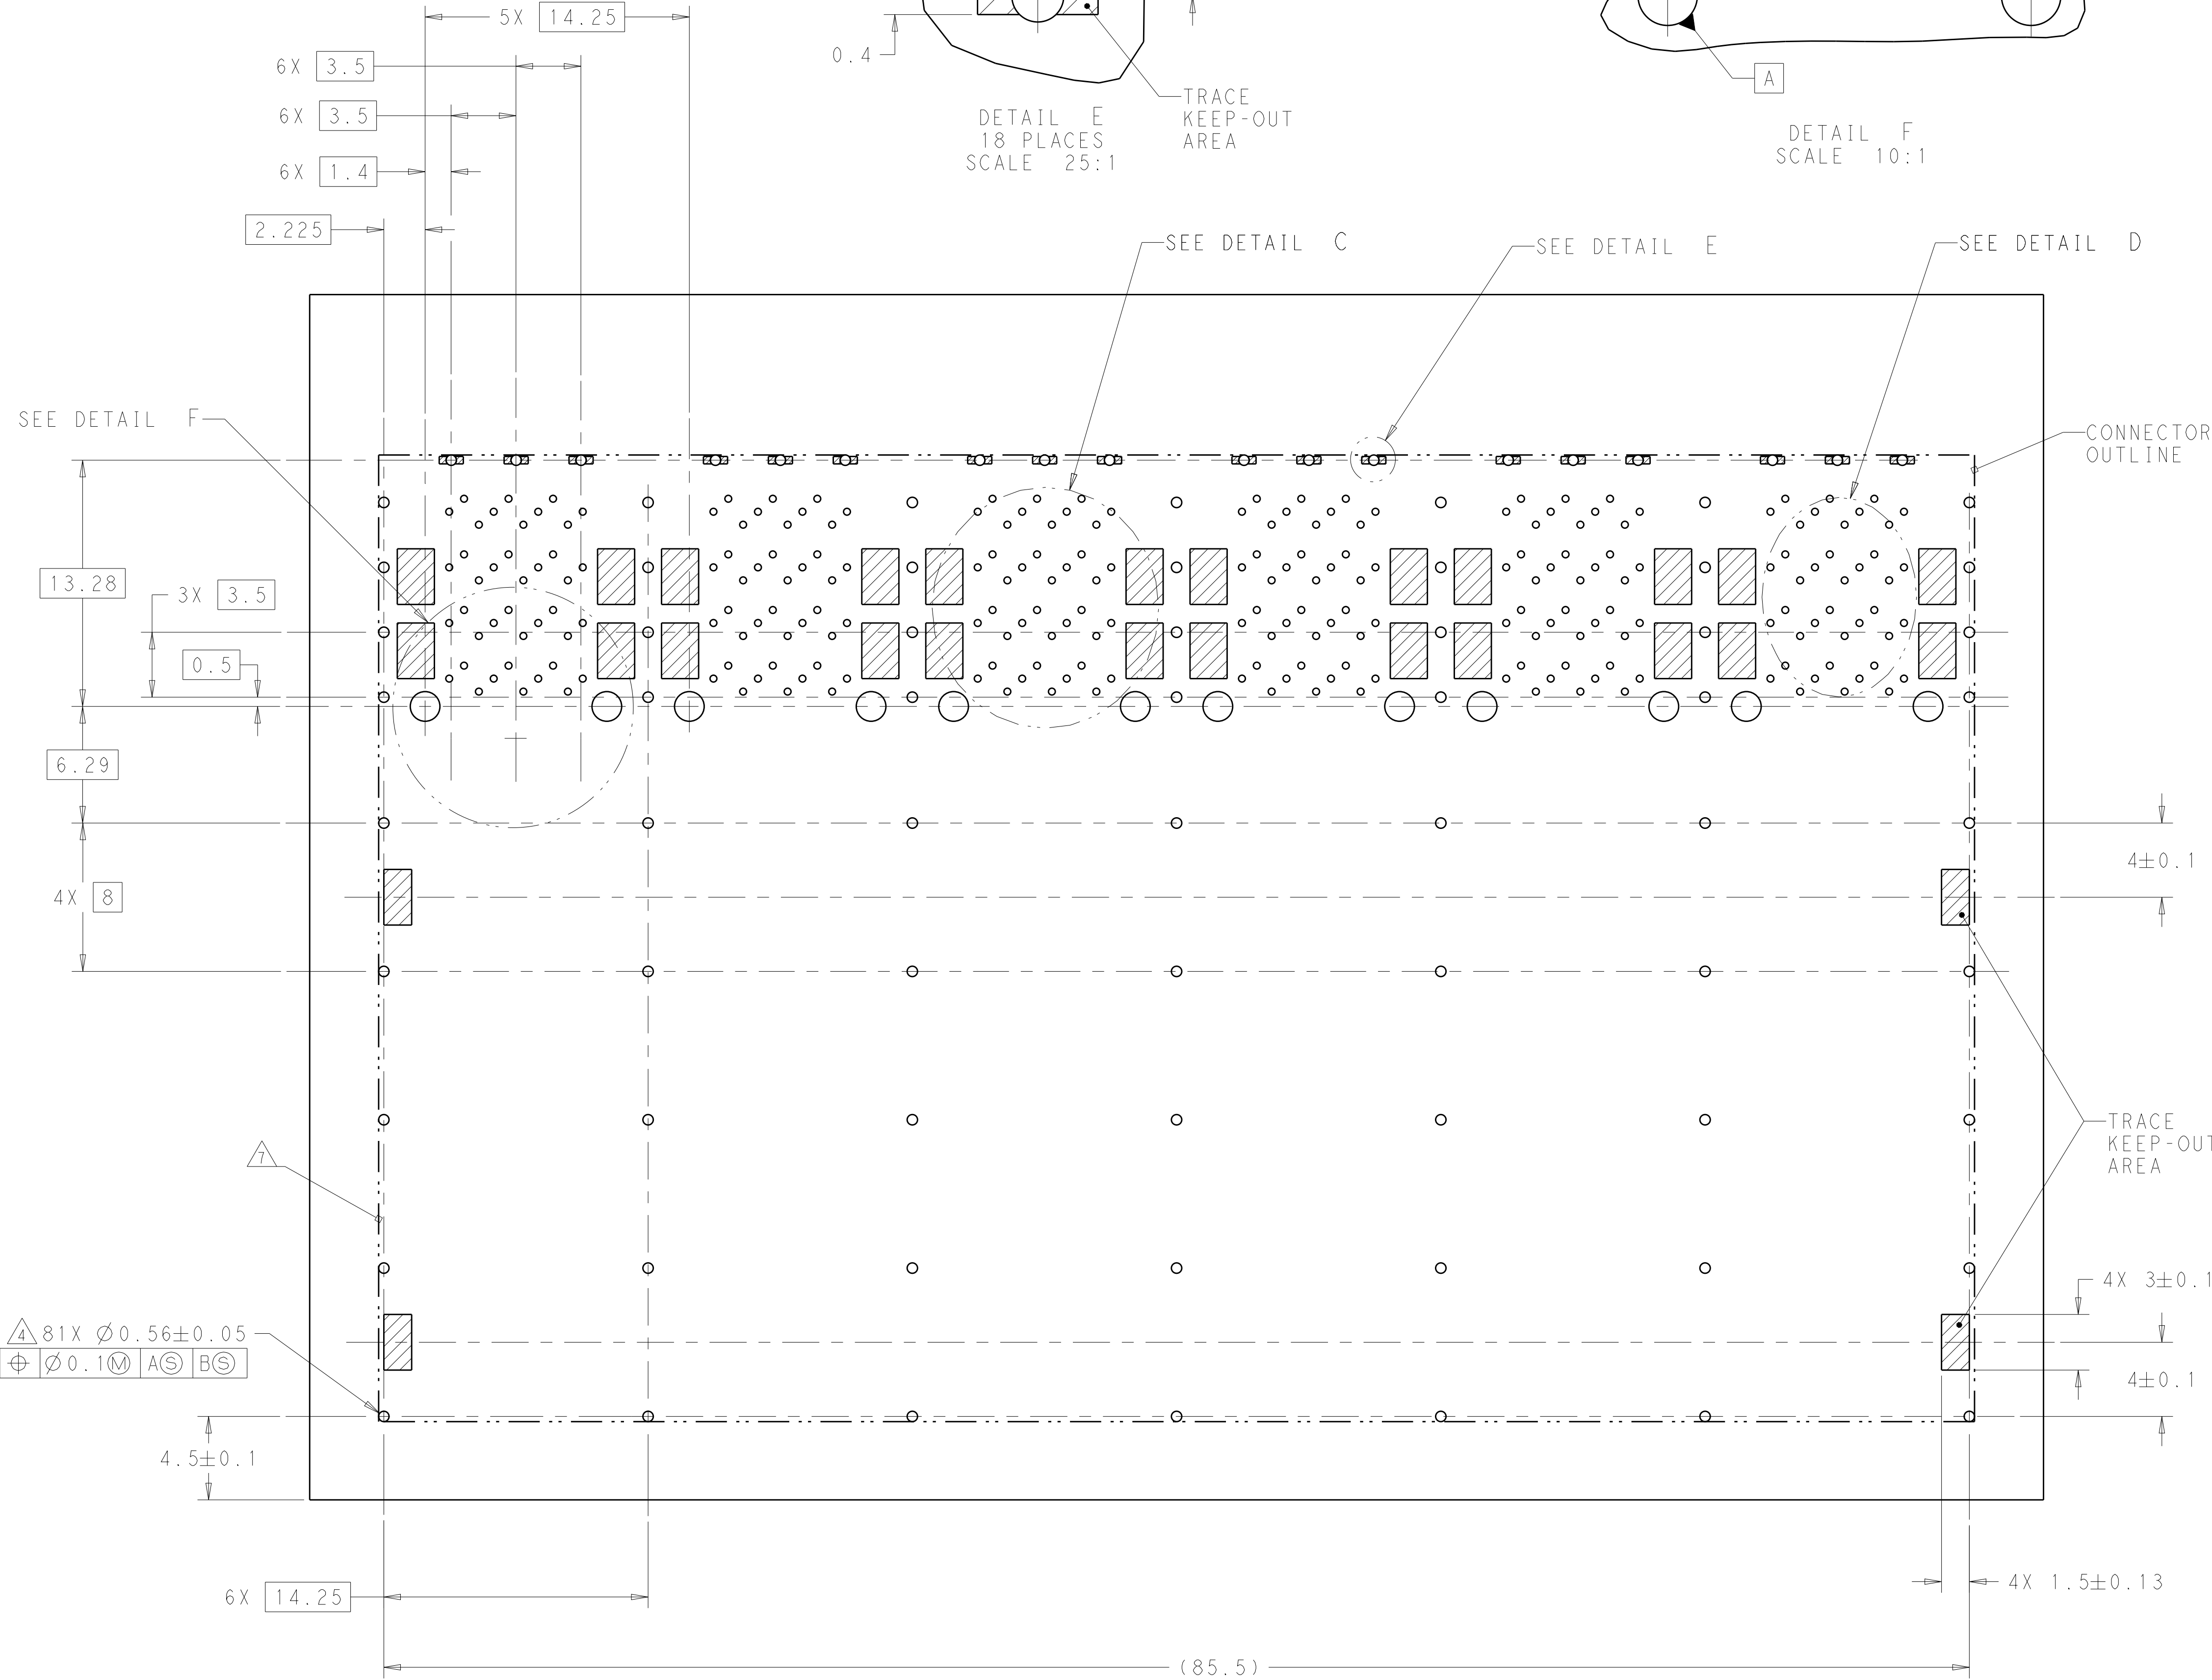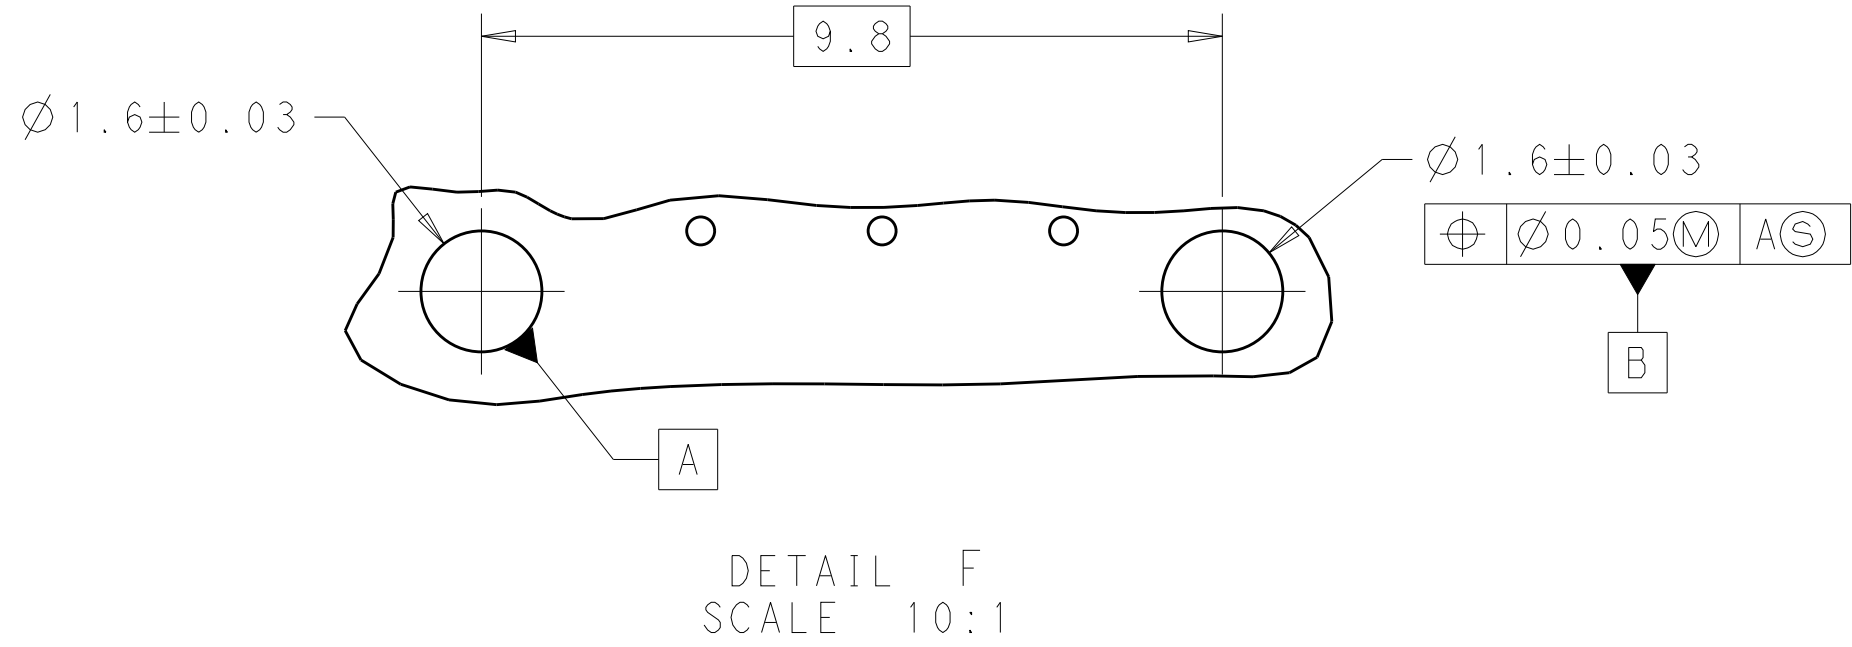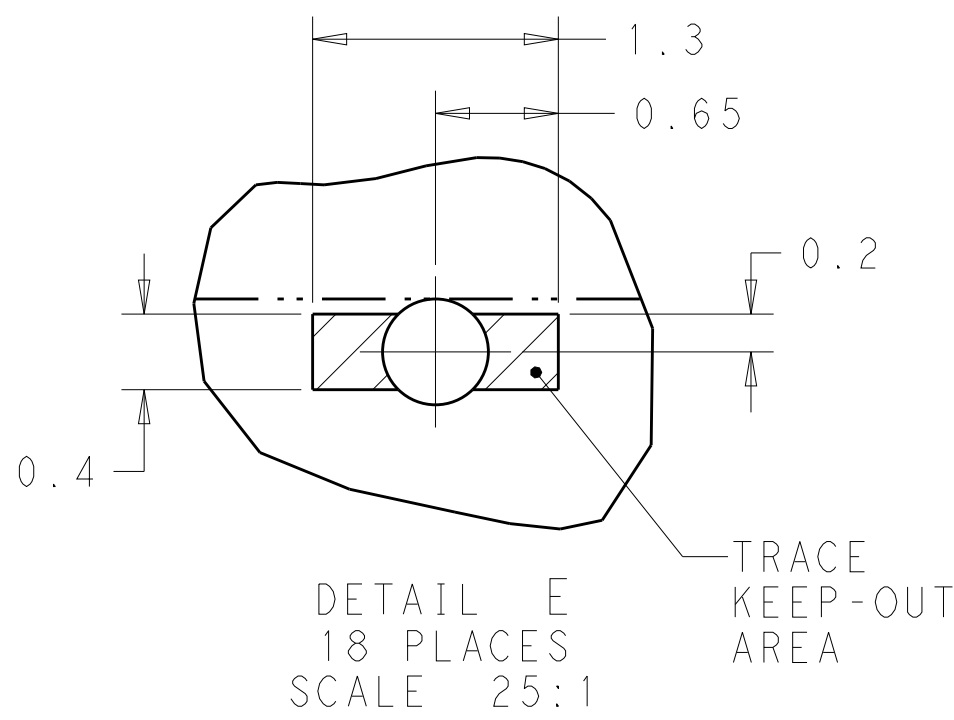


RECOMMENDED PCB LAYOUT
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	J. WANG	26FEB2019	 TE Connectivity						
DIMENSIONS:				CHK	S. HAN	26FEB2019							
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD	S. HAN	26FEB2019	NAME	RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56			
		0 PLC ±0.25				PRODUCT SPEC				SIZE			
		1 PLC ±0.25				108-2481							
		2 PLC ±0.25				APPLICATION SPEC							
		3 PLC ±0.25				114-13319							
4 PLC ±0.25		5 ±.005				WEIGHT				A100779			
ANGLES		FINISH				CUSTOMER DRAWING				SCALE 4:1			
SEE NOTES		SEE NOTES				SHEET 5 OF 6				REV A			

LOC		DIST		REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

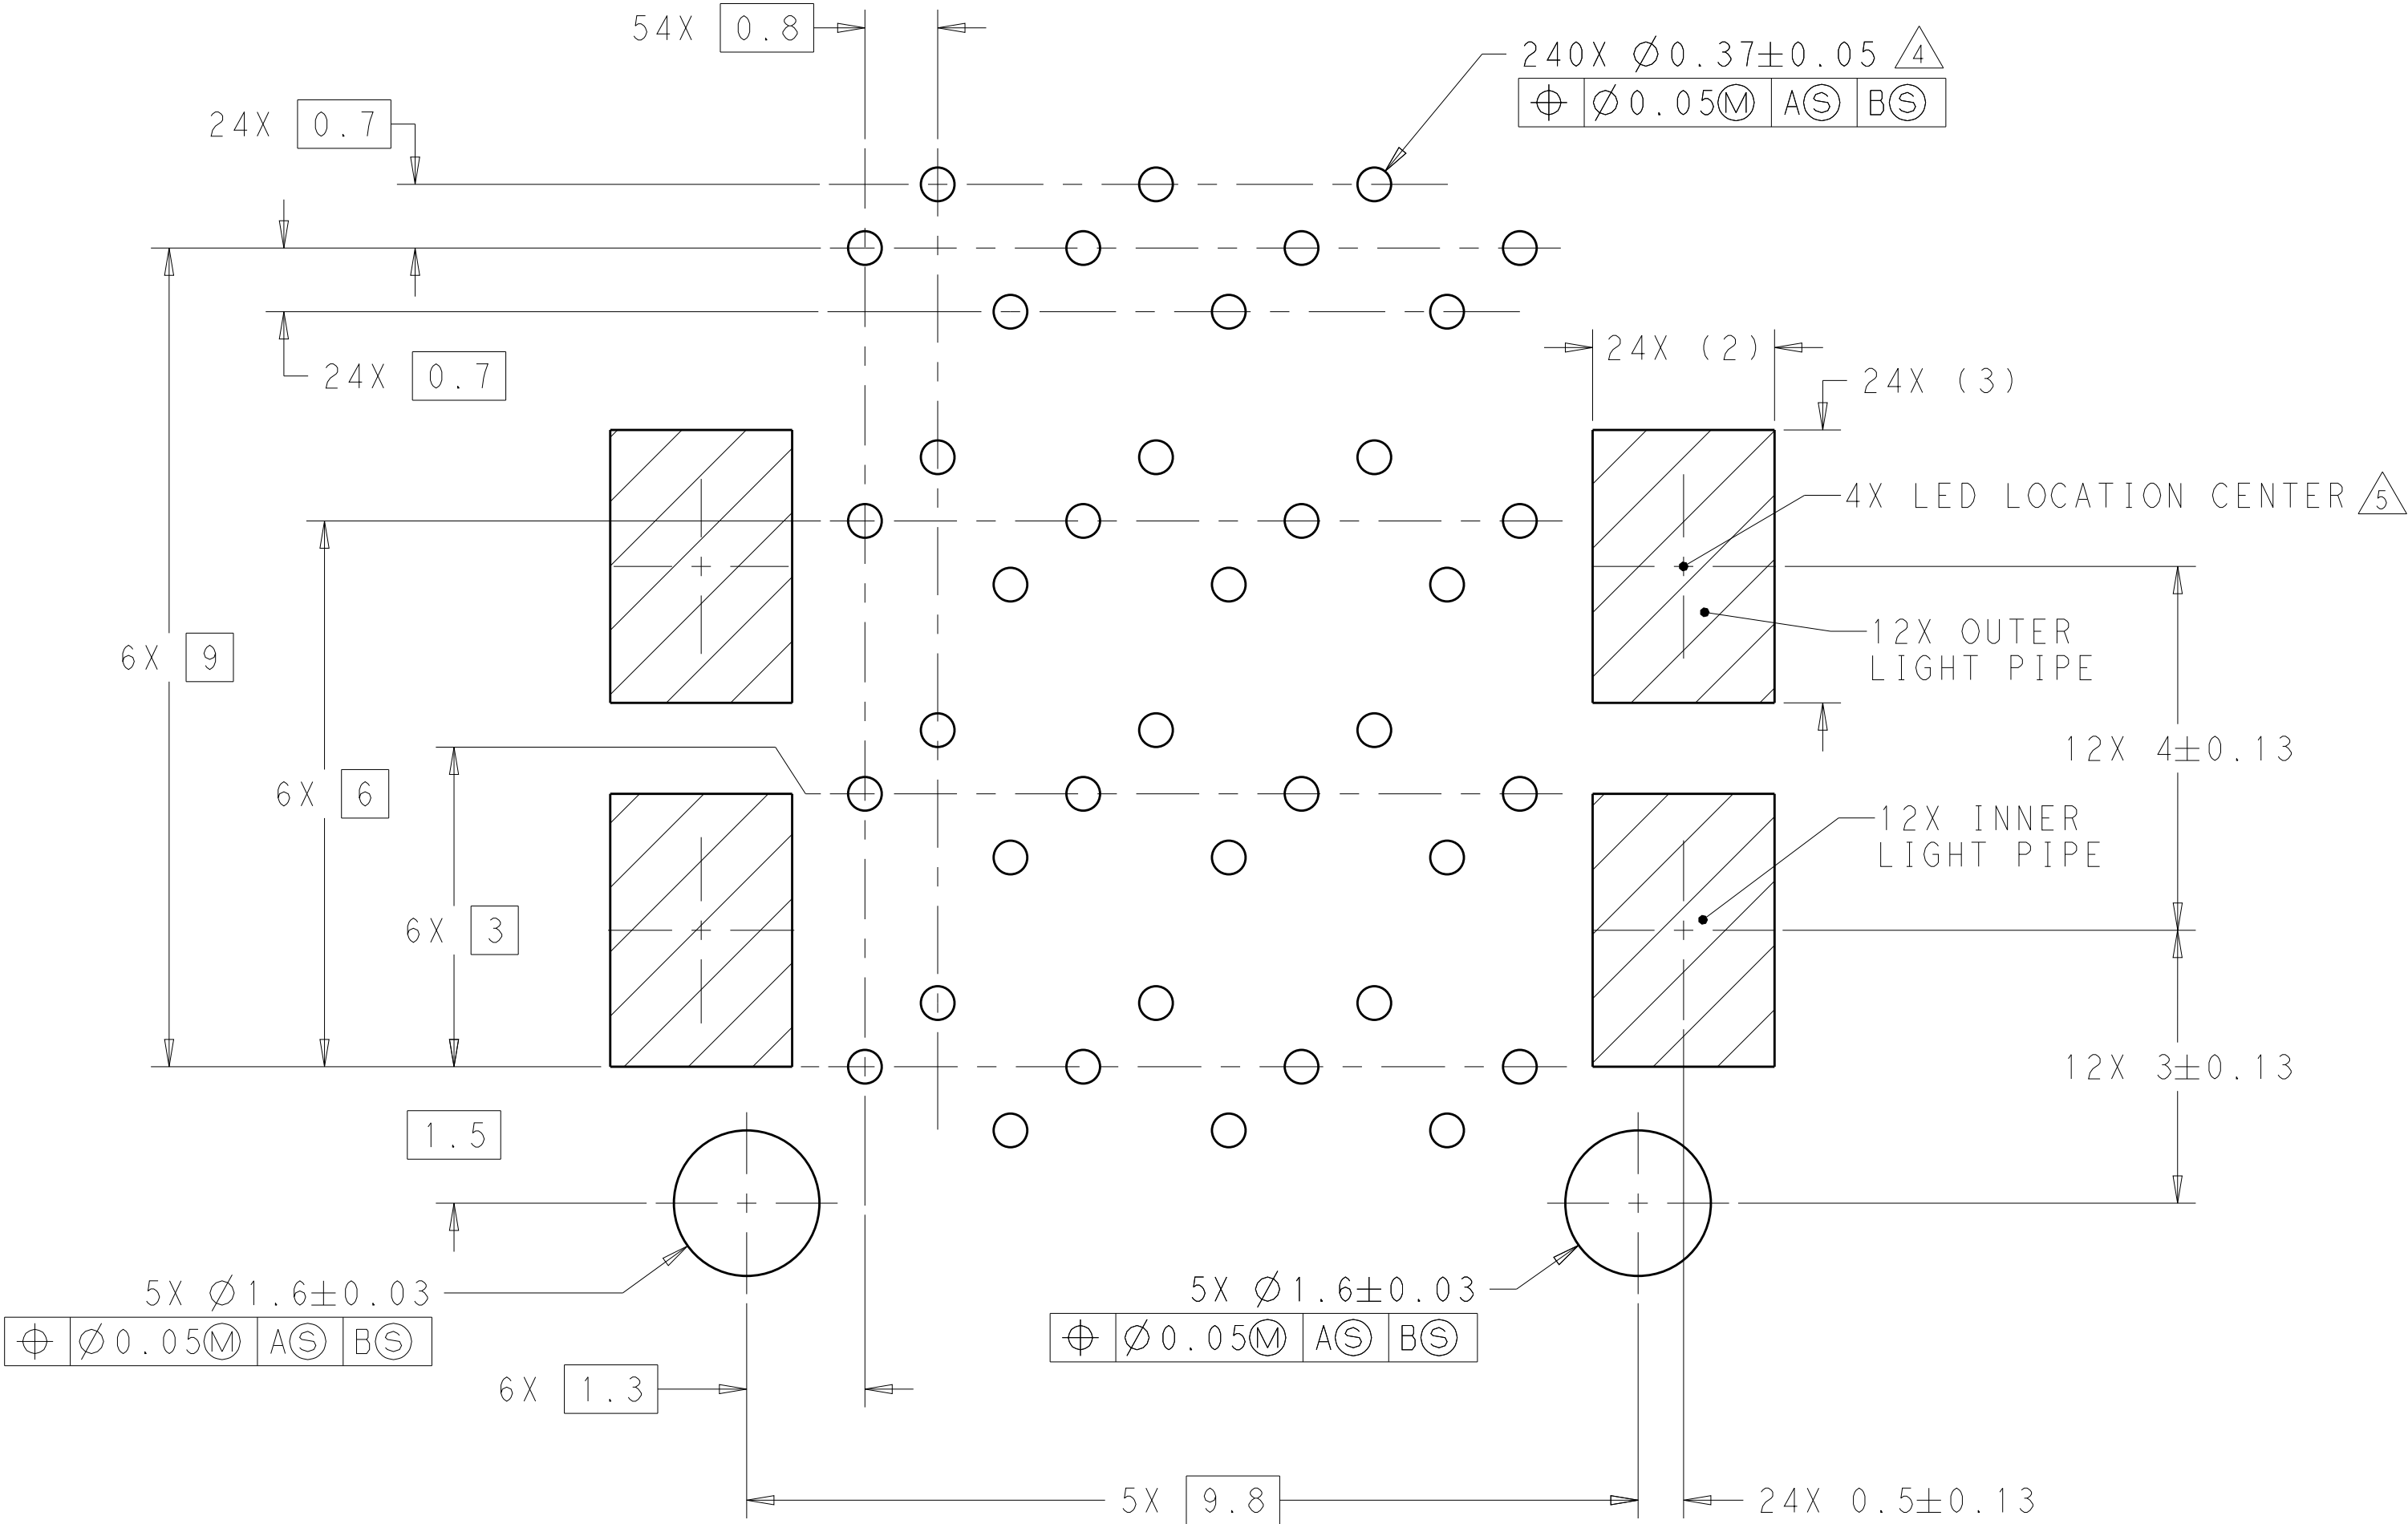


DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 15:1

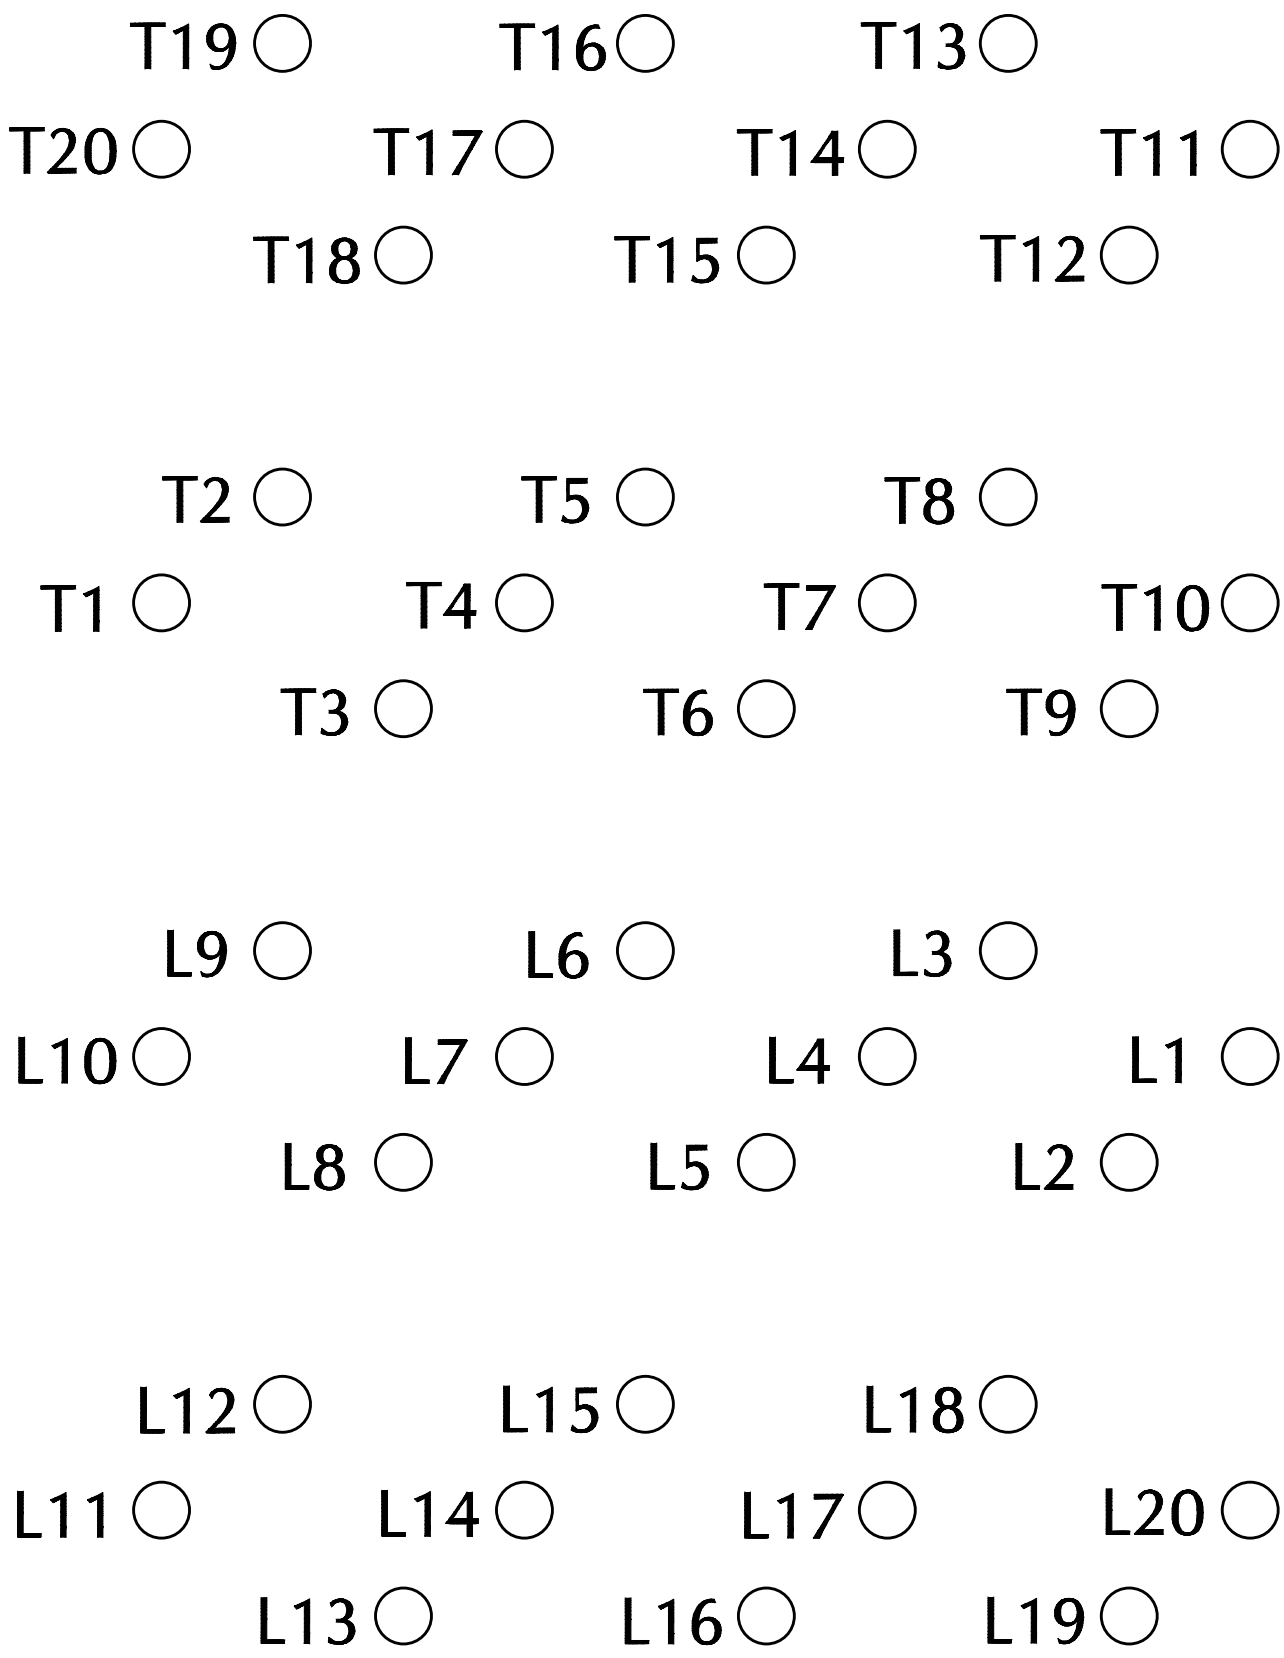


DETAIL D
PIN MAP
6 PLACES
SCALE 20:1

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

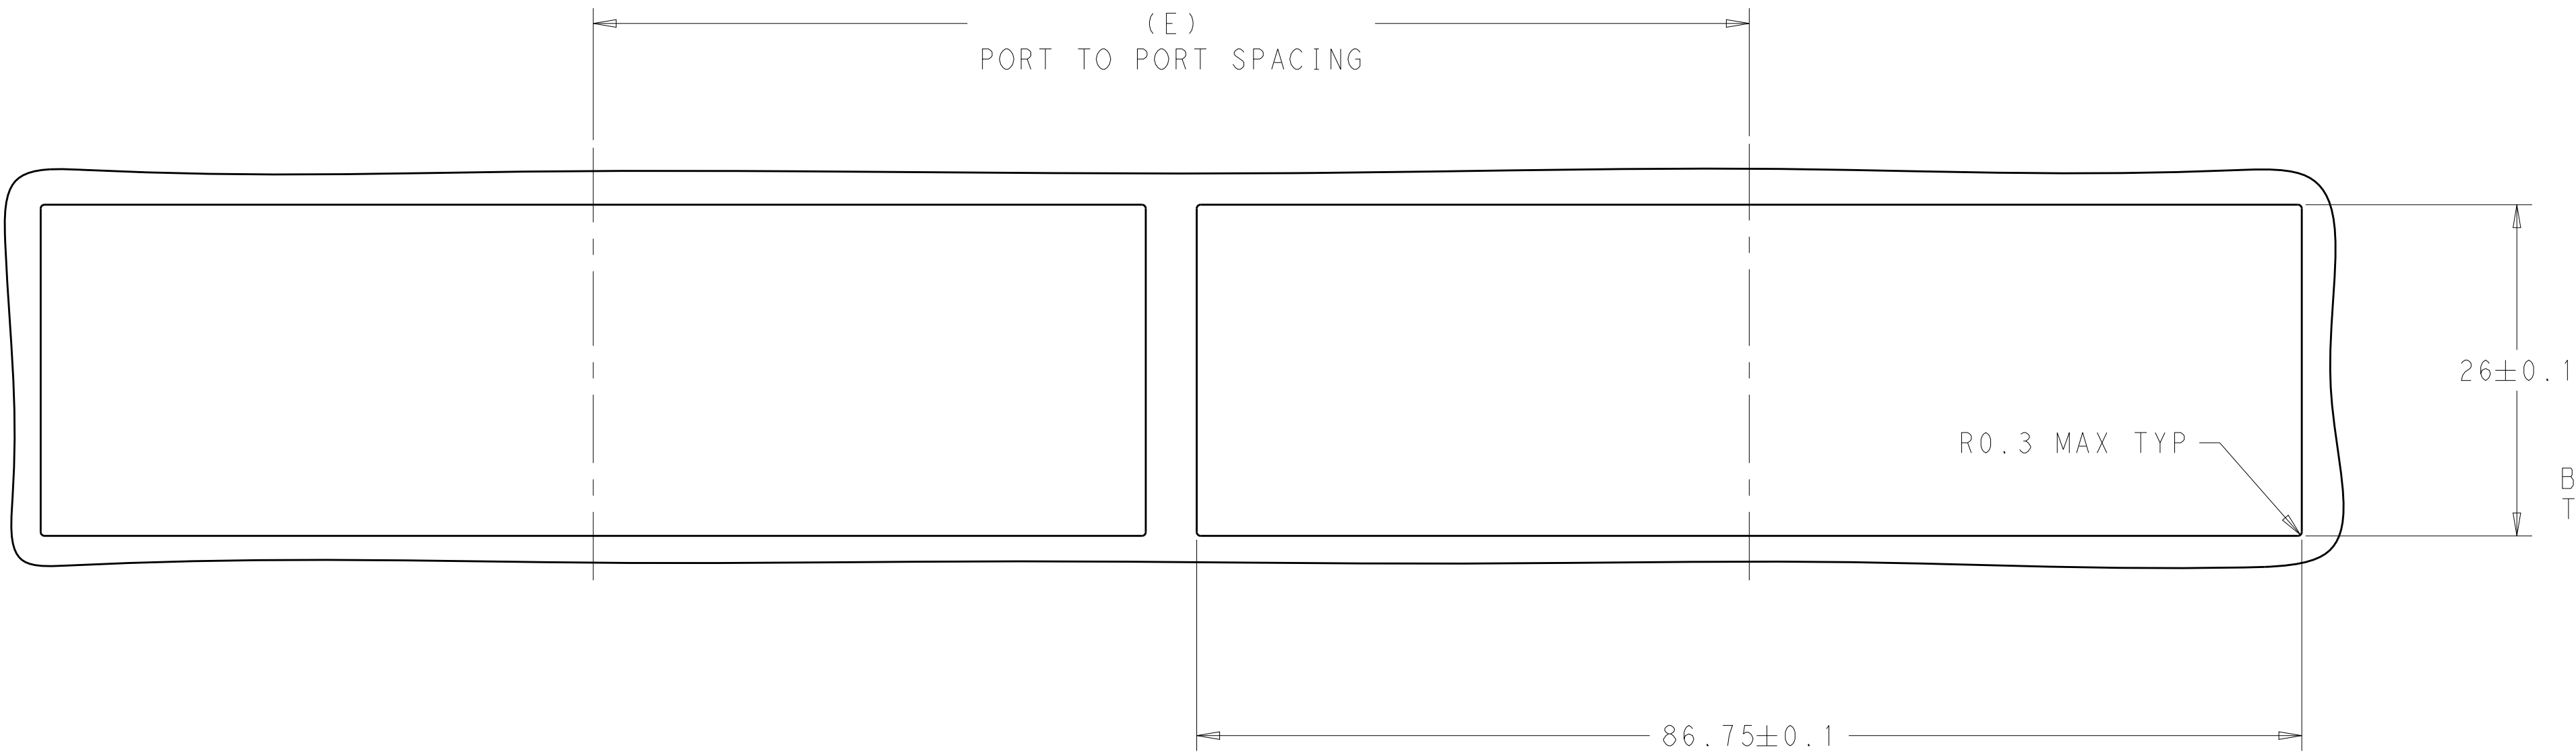

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:2

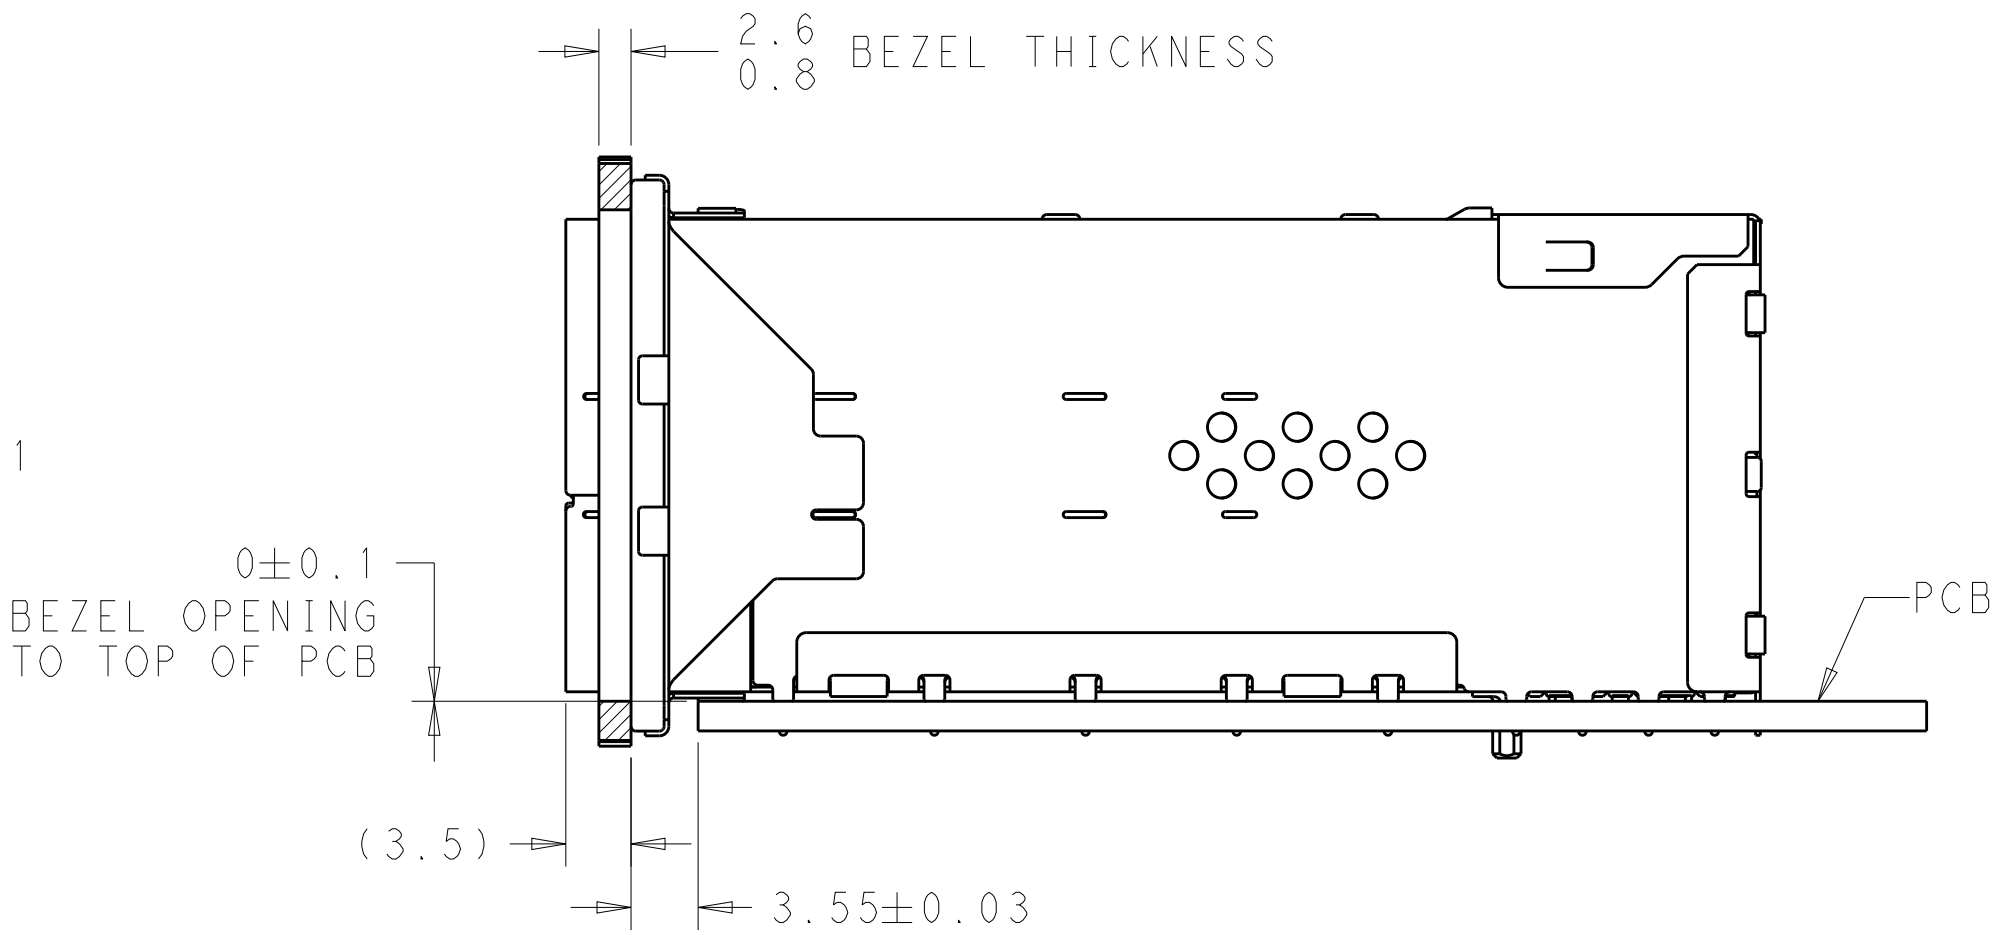

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 5:2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	 TE Connectivity		
DIMENSIONS:		CHK S. HAN 26FEB2019			
mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56 -	
	0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25 ANGLES ±°		PRODUCT SPEC 108-2481 APPLICATION SPEC 114-13319		
	MATERIAL SEE NOTES	FINISH SEE NOTES	WEIGHT -		SIZE A1
	CUSTOMER DRAWING		SCALE 4:1		SHEET 6 OF 6
			DRAWING NO 00779	RESTRICTED TO -	
			REV C	REV A	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru