

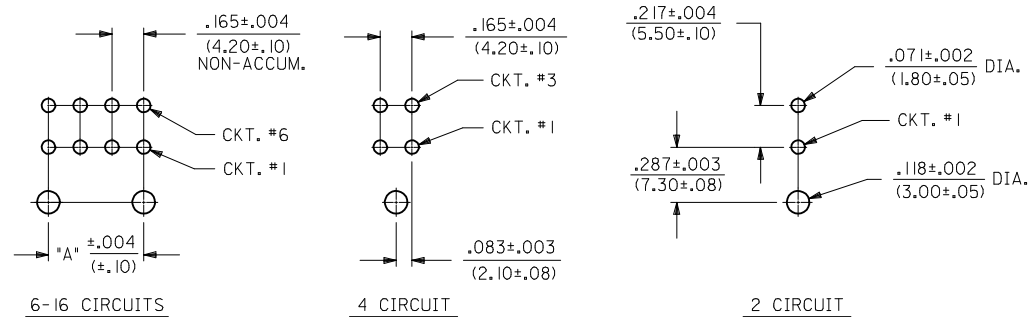
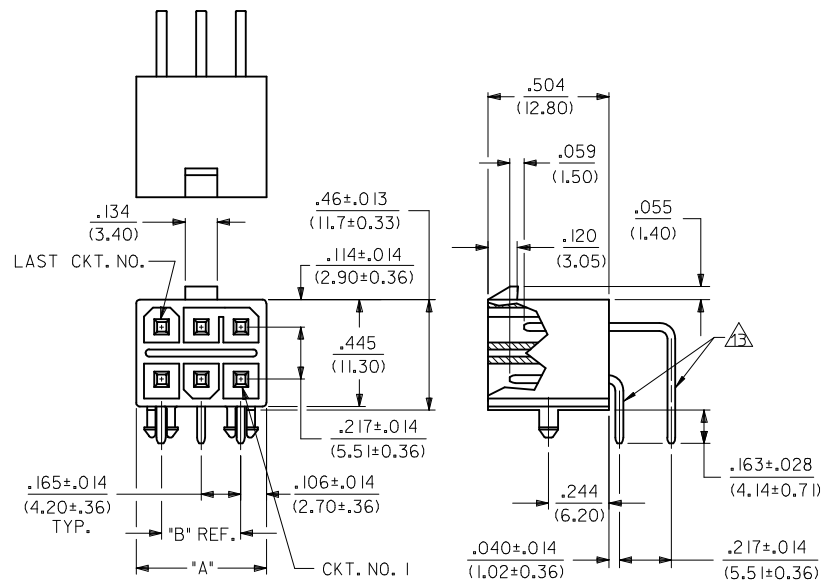
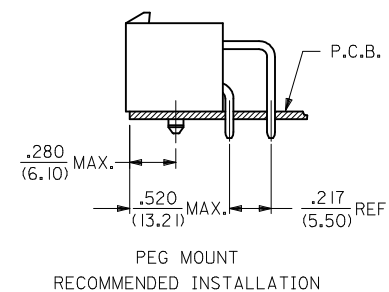


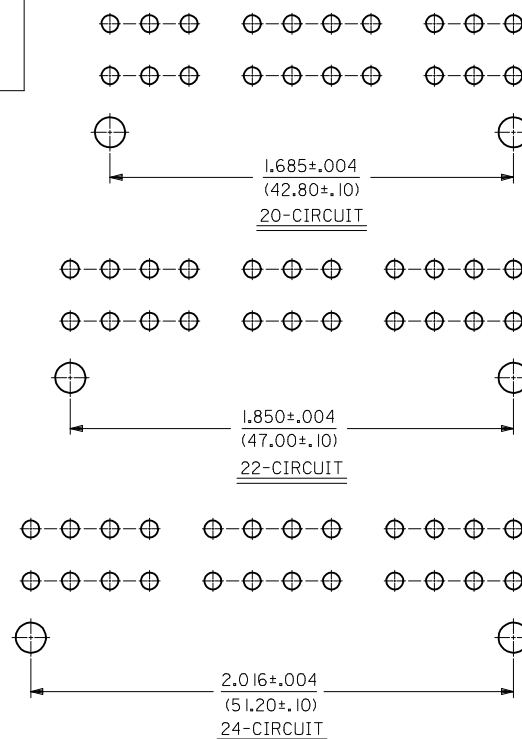

RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P.C. BOARD

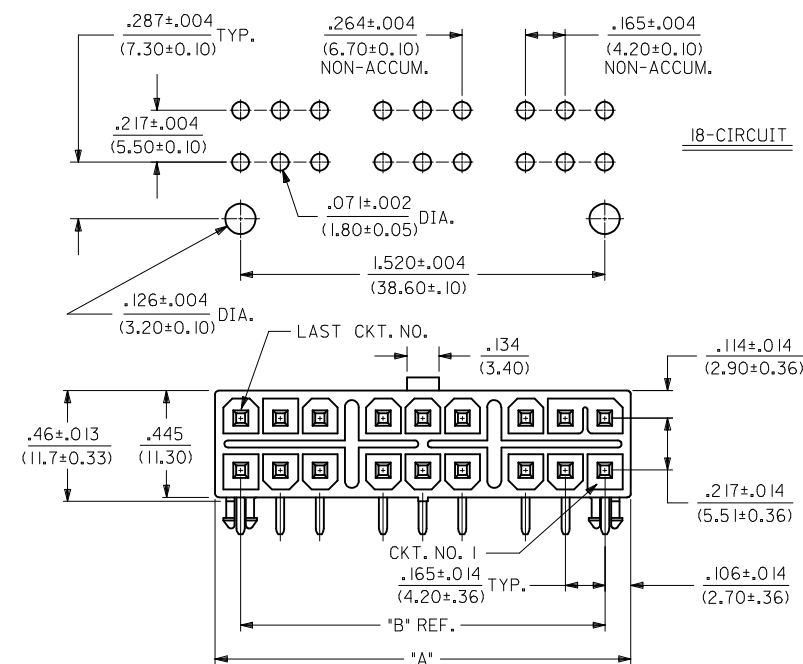


CKT. SIZE	DIM. "A"	DIM. "B"
2	.213 (5.40)	—
4	.378 (9.60)	.165 (4.20)
6	.543 (13.80)	.331 (8.40)
8	.709 (18.00)	.496 (12.60)
10	.874 (22.20)	.661 (16.80)
12	1.039 (26.40)	.827 (21.00)
14	1.205 (30.60)	.992 (25.20)
16	1.370 (34.80)	1.157 (29.40)
18	1.732 (44.00)	1.520 (38.60)
20	1.898 (48.20)	1.685 (42.80)
22	2.063 (52.40)	1.850 (47.00)
24	2.228 (56.60)	2.016 (51.20)

SEE SHEET 1 FOR FLANGE MOUNT

SEE SHEET 1 EC NO: UCP2014-0298 DRAWN: NGUYEN CHKD: JELL APPR: FSMITH	REV DESCRIPTION 2013/08/02 2013/08/02 2013/08/16	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
					DRAWN BY GEP		DATE 1994/08/01		RIGHT ANGLE HEADER ASSY SELECTIVELY LOADED MINI-FIT T.P.A. SERIES molex				
					CHECKED BY RJF		DATE 1994/08/01						
					APPROVED BY FSMITH		DATE 2011/09/12						
					MATERIAL NO.		DOCUMENT NO.					SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART			SDA-44483-****			2 OF 3	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

13		12		11		10		9		8		7		6		5		4		3		2		1						
ITEM NO.		CHARACTERISTIC DESCRIPTION		CKT. SIZE		TERMINAL VERSION REQUIRED AT EACH CIRCUIT LOCATION: (SEE CODES BELOW)																								PACKAGING TYPE
						1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
	44483-0001	I2A1C		I2	5	5	5	6	5	5	5	5	5	-	5	5	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0002	I2A2C		I2	5	5	5	6	5	5	5	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0003	I2A1C		I2	5	5	5	6	5	5	5	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0004	04A2C		04	5	5	6	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0005	04A2A		04	7	7	8	7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0006	I2A1C		I2	5	5	5	6	-	5	5	5	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0007	I6A2A		I6	7	7	8	7	7	8	8	7	8	7	8	7	8	7	7	8	-	-	-	-	-	-	-	-	BULK	
	44483-0008	I2A1C		I2	5	-	6	6	-	5	-	5	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0009	06A2C		06	5	5	6	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0010	06A1C		06	5	-	6	5	-	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0011	I2A3A		I2	7	7	7	7	7	7	7	7	-	7	7	-	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0012	I2A1C		I2	5	5	5	6	5	5	5	5	5	-	5	5	-	-	-	-	-	-	-	-	-	-	-	BULK		
	44483-0013	I2A1C		I2	5	5	5	6	-	5	5	5	5	-	5	-	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0014	I2A4D		I2	7	7	7	7	7	7	5	7	7	7	7	7	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0015	I2B3A		I2	-	7	7	7	7	-	-	7	7	-	7	7	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0016	I2A2C		I2	6	6	5	5	6	6	6	6	5	5	6	6	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0017	04A1C		04	-	5	6	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0018	04A1C		04	5	-	6	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TRAY		
	44483-0019	04A1C		04	5	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TRAY		

CHARACTERISTICS LEGEND:

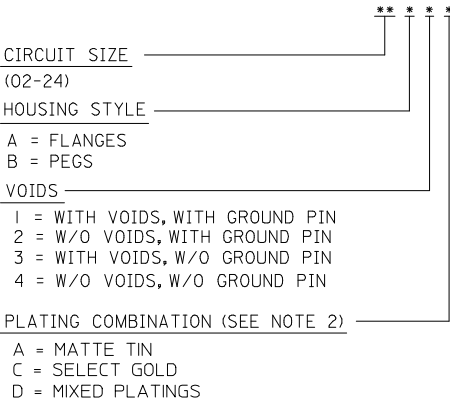

- NOTES:
- MATERIAL:
HOUSING: POLYSESTER, UNFILLED, UL94 V-0, COLOR: BLACK
TERMINAL: BRASS
 - FINISH (TERMINAL):
SELECT GOLD = .000030/(.00076) MIN. GOLD OVER .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL
MATTE TIN = .000100/(.00254) MIN MATTE TIN OVER .000050/(.00127) MIN NICKEL OVERALL
 - PRODUCT SPECIFICATION: PS-5556-003
 - PACKAGING: SEE CHART
TRAY PACKED PER: PK-44483-001
BULK PACKED PER: PK-30070-001
 - PART MATES WITH MINI-FIT T.P.A. RECEPTACLE 30067-*,
 - FLANGE MOUNT PART IS DESIGNED FOR USE WITH #4 OR M3 SELF TAPPING SCREWS.
 - SEE CHART ABOVE FOR STANDARD PIN, GROUND PIN AND VOID LOCATIONS.
 - PARTS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
 - PART IS NOT DESIGNED FOR CURRENT SHARING.
 - ITEM NUMBERS PRECEDED BY AND "X" IN THE CHART ABOVE ARE NOT AVAILABLE.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 - DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
 - FORMING MARKS ARE ACCEPTABLE.

OVERALL				PIN. I.D. CODES FOR CHART ABOVE				5 = WITH VOIDS, W/O GROUND PIN				4 = W/O VOIDS, W/O GROUND PIN			
				PIN TYPE & PLATING (SEE NOTE 2)								PLATING COMBINATION (SEE NOTE 2)			
												A = MATTE TIN			
												C = SELECT GOLD			
												D = MIXED PLATINGS			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru