

Housed Platinum Resistance Temperature Detector


SOT 223

The Pt1000 PRTD in a standard SOT 223 housing is characterized by its standardized signal according to DIN EN 60751 (according to IEC 751), interchangeability, high long time stability and accuracy. It is designed for automatic mounting in electronic applications and serves e. g. for temperature compensation on PCBs. It is equipped with a cooling fin improving thermal contact to the PCB.

Nominal Resistance R0	Tolerance DIN EN 60751 1996-07	Tolerance DIN EN 60751 2009-05	Order Number
1000 Ohm at 0°C	Class 2B	F 0,6	32 209 116

Other resistances and tolerances on request!

Specification	DIN EN 60751 (according to IEC 751)	
Temperature range	-50°C to +150°C Tolerance Class 2B: -50°C up to +150°C	
Temperature coefficient	TCR = 3850 ppm/K	
Soldering connection	Cu alloy with Sn coating	
Long-term stability	max. R ₀ -drift 0.04% after 1000 h at 150°C	
Resistance to soldering heat	max. deviation 0.03% after 10s at 260°C	
Self heating	0.049 K/mW at 0°C; mounted on PCB 0.2 K/mW at 0°C; package only	
Response time	water current (v = 0.4 m/s):	t _{0,5} = 0.45s t _{0,9} = 1.20s
	air stream (v = 2 m/s):	t _{0,5} = 8.0s t _{0,9} = 26.0s
Measuring current	1000Ω: 0.1 to 0.3mA (self heating has to be considered)	
Flammability	UL 94-V0	
Specific volume resistance	100°C: 14 x 10 ¹⁴ Ωcm 150°C: 0.3 x 10 ¹² Ωcm	
Physical data of housing	material: duroplastic coefficient of thermal expansion: 12 x 10 ⁻⁶ 1/°C (below T _g) thermal conductivity: 1.04 W/mK moisture absorption: Boiling Water (48 h) < 1.0 %	
Storing information	≤ 1 year (in dry environments) for best solderability	
Packaging	„Face-up“ in blister reel	
Note	Other tolerances and values of resistance are available on request.	

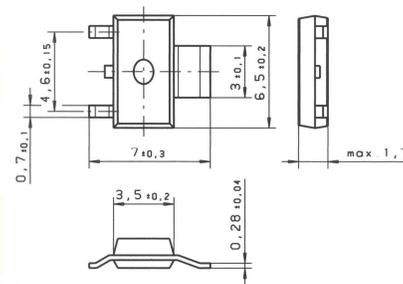

We reserve the right to make alterations and technical data printed. All technical data serves as a guideline and does not guarantee particular properties to any products.

Heraeus Sensor Technology USA

1901 Route 130

North Brunswick, NJ 08902

Phone 732-940-4400 Fax 732-940-4445

Email info.hst-us@heraeus.com

<http://heraeus-sensor-technology-us.com>

Name of document: 30910040 Index D
Status: 03/2013

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru